

High Order Diminution of LTI System using Stability Equation method

D. K. Sambariya*¹ and Gyanendra Arvind²

¹Department of Electrical Engineering,
Rajasthan Technical University,

Kota 324010 India

²Department of Electrical Engineering,
Rajasthan Technical University,

Kota 324010 India

Original Article

Abstract

In this paper, a high-order transfer function is reduced by the stability equation method. The reduced model is based on the pole zero patterns. In this paper, the stability equation method is compared to other methods and proved to be better in comparison to other methods in literature. The analysis is based on the settling time, rise time and overshoot observations of the reduced and original system.

Keywords: Reduced Order Model (ROM) Techniques, Stability Equation Method, Stability Array Method and Mixed Method.

1 Introduction

High-order system (HOS) is always costly and tedious. Model order reduction (MOR) is used for simplification of complicated problems in HOS. The selection of the model reduction technique is based on stability equation method as presented in (Hutton and Friedland, 1975). The procedure of simplification is based on using mathematical approaches. Many methods to solve HOS for reduced order model (ROM) of the system are available in literature (Appiah, 1978; Jiang and Chen, 2012). The differentiation method for MOR of the systems has been proposed in (Gutman et al, 1982). It follows the simple steps of differentiation of the numerator and denominator polynomials but suffers with steady state error in the response of MOR as compared to original system (Sambariya and Prasad, 2012a; Lucas, 1988). The methods in literature are not following the stability criterion except the stability equation method (Lucas, 1992). However, mixed method approach is prevalent to consider the stability effect in literature where the numerator and denominator are solved by using different/distinct method as in (Shamash, 1975; Krishnamurthy and Seshadri, 1978; Sikander and Prasad, 2015a).

*Corresponding author: E-mail: dsambariya.2003@yahoo.com

Recently, Desai and Prasad, have proposed the implementation of order reduction on TMS320C54X processor using genetic algorithm (Desai and Prasad, 2013a). It also included fourth order example and reduced to 2nd order model. Pati et al, have proposed work on sub-optimal control using model order reduction (Pati et al, 2014). Lodhwal and Jha, have proposed the performance comparison of different type of reduced order modeling methods (Lodhwal and Jha, 2013; Sambariya and Prasad, 2012e). Model order reduction using stability equation method Desai and Prasad (2013b) and the continued fraction method (Chen et al, 1980) have been considered for deduction of MOR systems. Sambariya and Prasad, have proposed stable reduced model of a Single Machine Infinite Bus Power System (SMIB) with Power System Stabilizer, which is a seventh order system and being reduced to 2nd order ROM (Sambariya and Prasad, 2013, 2012b,c,d).

MOR is used in industrial applications. In industrial application there are some similar measurement methods which minimize measurement error by transfer function method considering a different order transfer function of the system as presented in (Matko, 2004; Matko and Koprivnikar, 1998; Matko et al, 1994). The selection of reduction technique is based on the closeness of the reduced order models response to higher order model response (Bansal et al, 2011). In literature, many authors have considered different methods to solve these problems. The Routh approximation method have been used in Sikander and Prasad (2015c). Alsmadi et al have presented the application of Sylvester based model order reduction for a multi-input multi-output (MIMO) power system (Alsmadi et al, 2014). It is based on the preservation of stability by retaining dominant poles and minimization of steady-state error. The application of PSO is examined in (Sikander and Prasad, 2015c) by minimizing integral of square error of the response of original and reduced system. The genetic algorithm (GA) have been considered to determine the free coefficients of numerator and denominator of discrete transfer function in Alsmadi and Abo-Hammour (2015). Soloklo, have presented the application of harmony search algorithm with multi-objective function for determining the lower order model of HO systems Soloklo and Farsangi (2013). The application of Hermite polynomials with GA is presented for ROM of large systems in (Soloklo et al, 2014). The stable reduced order modeling for linear time invariant systems is presented in (Sambariya and Prasad, 2012e,c). The application of cuckoo search is considered for deriving reduced order system of HOSs (Sikander and Prasad, 2015b).

In this paper the application of stability equation method is presented for driving reduced order model of the higher order linear time invariant systems. The rest of paper is organized in four sections. The statement of problem along with the review on stability equation method is presented in section 2. The stability equation method is used for deriving the reduced order model and comparative study have been presented in section 3. The manuscript is concluded in section 4, followed by references.

2 Methodology for ROM

Consider a high order transfer function of a system represented as in Eqn. 2.1.

$$G(s) = \frac{\sum_{i=0}^{n-1} b_i s^i}{\sum_{i=0}^n a_i s^i} \quad (2.1)$$

where, the $G(s)$ represents a high order system with the order of n . The purpose of manuscript is to reduce the order of such high order system to r . The reduced order model may be represented as in Eqn. 2.2.

$$R(s) = \frac{\sum_{j=0}^{r-1} d_j s^j}{\sum_{j=0}^r c_j s^j} \quad (2.2)$$

where, a_i , b_i , c_j and d_j are the scalar constants of original high order system and the reduced order system. The objective is to find a reduced r^{th} order system model $R(s)$ such that it retains the important properties of $G(s)$ for the same types of inputs.

2.1 Steps for stability equation method

In this technique, the transfer function of reduced orders are obtained directly from the pole zero patterns of the stability equations of the original transfer function of system (Sambariya and Prasad, 2013; Chen et al, 1980). Thus order of the stability equations of transfer function can be reduced (Sikander and Prasad, 2015b). Assuming, a high order transfer function the system is as shown in Eqn. 2.3.

$$G(s) = \frac{b_m s^m + b_{m-1} s^{m-1} + \dots b_1 s + b_0 + b_o}{a_n s^n + a_{n-1} s^{n-1} + \dots a_1 s + a_0} \quad (2.3)$$

$$G(s) = \frac{N(s)}{D(s)} \quad (2.4)$$

The Eqn. 2.4 is the symbolic representation of Eqn. 2.3. The $N(s)$ and $D(s)$ are the numerator and the denominator of $G(s)$, respectively. The order of $D(s)$ is n and the order of $N(s)$ is m such that the $n > m$.

2.1.1 Separation of even, odd parts and reduction

The numerator and the denominator of Eqn. 2.4 are separated in even and odd parts. If the even and odd parts are sub-scripted by e and o , respectively. The even and odd polynomials of numerator may be represented by $N_e(s)$ and $N_o(s)$, respectively. Similarly, the even and odd polynomials of denominator may be represented by $D_e(s)$ and $D_o(s)$, respectively. Therefore, the system in Eqn. 2.4 may be represented as following:

$$G(s) = \frac{N_e(s) + N_o(s)}{D_e(s) + D_o(s)} \quad (2.5)$$

$$G(s) = \frac{\sum_{i=0,2,4}^m b_i s^i + \sum_{i=1,3,5}^m b_i s^i}{\sum_{i=0,2,4}^n a_i s^i + \sum_{i=1,3,5}^n a_i s^i} \quad (2.6)$$

$$\begin{aligned} N_e(s) &= \sum_{i=0,2,4}^m b_i s^i \\ N_o(s) &= \sum_{i=1,3,5}^m b_i s^i \\ D_e(s) &= \sum_{i=0,2,4}^n a_i s^i \\ D_o(s) &= \sum_{i=1,3,5}^n a_i s^i \end{aligned} \quad (2.7)$$

The roots of $N_e(s)$ and $D_e(s)$ are called zeros $z_i(s)$ and that of $N_o(s)$ and $D_o(s)$ are called poles $p_i(s)$. In this method, a polynomial is reduced by successively discarding the less significant factors. Let us illustrate the method by reducing the denominator, the numerator is reduced similarly and the ratio of reduced numerator and denominator gives the reduced order model. The denominator is separated as following:

$$D(s) = D_e(s) + D_o(s) \quad (2.8)$$

where,

$$\begin{aligned} D_e(s) &= a_0 + a_2 s^2 + a_4 s^4 + \dots \\ D_o(s) &= a_1 + a_3 s^3 + a_5 s^5 + \dots \end{aligned} \quad (2.9)$$

The Eqn. 2.9 may be written as the following:

$$\begin{aligned} D_e(s) &= a_0 \prod_{i=1}^{k_1} \left(1 + \frac{s^2}{z_i^2}\right) \\ D_o(s) &= a_1 s \prod_{i=1}^{k_2} \left(1 + \frac{s^2}{p_i^2}\right) \end{aligned} \quad (2.10)$$

where k_1 and k_2 are integer parts of $n/2$ and $(n-2)/2$ respectively and $z_{12} < p_{12} < z_{22} < p_{22} \dots$ by discarding the factors with larger magnitude of z_i and p_i , the reduced stability equations of desired order r become

$$\begin{aligned} D_{er}(s) &= a_o \prod_{i=1}^{r_1} \left(1 + \frac{s^2}{z_i^2}\right) \\ D_{or}(s) &= a_1 \prod_{i=1}^{r_2} \left(1 + \frac{s^2}{p_i^2}\right) \end{aligned} \quad (2.11)$$

where r_1 and r_2 are the integer parts of $r/2$ and $(r-1)/2$, respectively. The reduced denominator of the system is given as in Eqn. 2.12.

$$D_r(s) = D_{er}(s) + D_{or}(s) \quad (2.12)$$

The numerator of the reduced system may be represented as in following Eqn. 2.13.

$$N_r(s) = N_{er}(s) + N_{or}(s) \quad (2.13)$$

Similarly, the complete model of the r^{th} order reduced model may be represented as in Eqn. 2.14.

$$R(s) = \frac{N_{er}(s) + N_{or}(s)}{D_{er}(s) + D_{or}(s)} \quad (2.14)$$

It may be noted that poles and zeros with smaller magnitude are more dominant than those poles or zeros with larger magnitudes. The poles or zeros with larger magnitudes are discarded in this technique. Thus the reduced order models preserve the dominant performance of the original system.

3 Comparative results and discussion

3.1 System - 1

Considering a 8^{th} order system from literature survey as shown in Eqn. 3.1 (Shamash, 1975).

$$G(s) = \frac{18s^7 + 514s^6 + 5928s^5 + 36380s^4 + 122664s^3 + 222088s^2 + 185760s + 40320}{s^8 + 36s^7 + 546s^6 + 4536s^5 + 22449s^4 + 67284s^3 + 118124s^2 + 185760s + 40320} \quad (3.1)$$

3.1.1 ROM by methods in literature

The 2^{nd} order ROM in literature using Ant Bee Colony Optimization (ABC) method as in (Bansal et al, 2011).

$$G_2(s) = \frac{1.99s + 0.4318}{s^2 + 1.174s + 0.4318} \quad (3.2)$$

The 2^{nd} order ROM in literature using par Particle Swarm Optimization (PSO) method as in (Panda et al, 2009).

$$G_2(s) = \frac{88.0369s + 26.4768}{4.0214s^2 + 28.5882s + 2.6476} \quad (3.3)$$

3.1.2 ROM by proposed method

Reduction of numerator:

The 7th order polynomial of the numerator of the original system is shown in the following Eqn. 3.4.

$$N_7(s) = 18s^7 + 514s^6 + 5982s^5 + 36380s^4 + 122664s^3 + 222088s^2 + 185760s + 40320 \quad (3.4)$$

Step-1: Reduction of numerator from 7th order to 5th order.

The arrangement of the odd and even terms is shown in the following Eqn. 3.5.

$$N_7(s) = \underbrace{18s^7 + 5982s^5 + 122664s^3 + 185760s}_{\text{odd terms: } N_o(s)} + \underbrace{514s^6 + 36380s^4 + 222088s^2 + 40320}_{\text{even terms: } N_e(s)} \quad (3.5)$$

$$\begin{aligned} N_o(s) &= 5982s^5 \left(1 + \underbrace{\frac{18}{5982}}_{=0.003009} s^2 \right) + 185760s \left(1 + \underbrace{\frac{122664}{185760}}_{=0.66033} s^2 \right) \\ &= 5982s^5 + 122664s^3 + 185760s \end{aligned} \quad (3.6)$$

$$\begin{aligned} N_e(s) &= 36380s^4 \left(1 + \underbrace{\frac{514}{36380}}_{=0.014128} s^2 \right) + 40320 \left(1 + \underbrace{\frac{222088}{40320}}_{=5.5081} s^2 \right) \\ &= 36380s^4 + 222088s^2 + 40320 \end{aligned} \quad (3.7)$$

Combining above Eqns. 3.6-3.7 to get complete 5th order system as following:

$$N_5(s) = 5982s^5 + 122664s^3 + 185760s + 36380s^4 + 222088s^2 + 40320 \quad (3.8)$$

Step-2: Reduction of 5th order numerator to 3rd order.

$$N_5(s) = \underbrace{5982s^5 + 122664s^3 + 185760s}_{\text{odd}} + \underbrace{36380s^4 + 222088s^2 + 40320}_{\text{even}} \quad (3.9)$$

$$N_o(s) = 122664s^3 \left(1 + \underbrace{\frac{5982}{122664}}_{=0.04876} s^2 \right) + 185760s = 122664s^3 + 185760s \quad (3.10)$$

$$\begin{aligned} N_e(s) &= 222088s^2 \left(1 + \underbrace{\frac{36380}{222088}}_{=0.16380} s^2 \right) + 40320 = 222088s^2 + 40320 \\ N_3(s) &= 122664s^3 + 185760s + 222088s^2 + 40320 \end{aligned} \quad (3.11)$$

Step-3: Reduction of 3rd order reduced numerator to 1st order.

$$N_3(s) = \underbrace{122664s^3 + 185760s}_{\text{odd}} + \underbrace{222088s^2 + 40320}_{\text{even}} \quad (3.12)$$

$$\begin{aligned} N_o(s) &= 122664s^3 + 185760s = 185760s \left(1 + \frac{122664}{185760} s^2 \right) \\ N_e(s) &= 222088s^2 + 40320 = 40320 \left(1 + \frac{222088}{40320} s^2 \right) \\ N_2(s) &= 185760s + 40320 \end{aligned} \quad (3.13)$$

Reduction of denominator:

Step-1: Reduction of 8th order denominator to 6th order.

The arrangement of the odd and even terms is shown in the following Eqn. 3.14.

$$D_8(s) = s^8 + 36s^7 + 546s^6 + 4536s^5 + 22449s^4 + 67284s^3 + 118124s^2 + 109584s + 40320$$

$$= \underbrace{s^8 + 546s^6 + 22449s^4 + 118124s^2 + 40320}_{\text{even}} + \underbrace{36s^7 + 4536s^5 + 67284s^3 + 109584s}_{\text{odd}} \quad (3.14)$$

$$D_e(s) = s^8 + 546s^6 + 22449s^4 + 118124s^2 + 40320 \quad (3.15)$$

$$D_o(s) = 36s^7 + 4536s^5 + 67284s^3 + 109584s$$

$$D_e(s) = s^8 + 546s^6 + 22449s^4 + 118124s^2 + 40320$$

$$= 546s^6 \left(1 + \underbrace{\frac{1}{546}}_{=0.00183} s^2 \right) + 118124s^2 \left(1 + \underbrace{\frac{22449}{118124}}_{=0.19004} s^2 \right) + 40320 \quad (3.16)$$

$$= 546s^6 + 22449s^4 + 118124s^2 + 40320$$

$$D_o(s) = 36s^7 + 4536s^5 + 67284s^3 + 109584s$$

$$= 4536s^5 \left(1 + \underbrace{\frac{36}{4536}}_{=0.00793} s^2 \right) + 109584s \left(1 + \underbrace{\frac{67284}{109584}}_{=0.6139947} s^2 \right) \quad (3.17)$$

$$= 4536s^5 + 67284s^3 + 109584s$$

$$D_6(s) = 546s^6 + 22449s^4 + 118124s^2 + 40320 + 4536s^5 + 67284s^3 + 109584s \quad (3.18)$$

Step-2: Reduction of 6th order denominator to 4th order.

$$D_6(s) = \underbrace{546s^6 + 22449s^4 + 118124s^2 + 40320}_{\text{even}} + \underbrace{4536s^5 + 67284s^3 + 109584s}_{\text{odd}} \quad (3.19)$$

$$D_e(s) = 546s^6 + 22449s^4 + 118124s^2 + 40320$$

$$= 22449s^4 \left(1 + \underbrace{\frac{546}{22449}}_{=0.02432} s^2 \right) + 40320 \left(1 + \underbrace{\frac{118124}{40320}}_{=2.9296627} s^2 \right) \quad (3.20)$$

$$= 22449s^4 + 118124s^2 + 40320$$

$$D_o(s) = 4536s^5 + 67284s^3 + 109584s$$

$$= 67284s^3 \left(1 + \underbrace{\frac{4536}{67284}}_{=0.067415} s^2 \right) + 109584s \quad (3.21)$$

$$= 67284s^3 + 109584s$$

$$D_4(s) = 22449s^4 + 118124s^2 + 40320 + 67284s^3 + 109584s \quad (3.22)$$

Step-3: Reduction of 4th order reduced denominator to 2nd order.

$$D_4(s) = \underbrace{22449s^4 + 118124s^2 + 40320}_{\text{even}} + \underbrace{67284s^3 + 109584s}_{\text{odd}} \quad (3.23)$$

$$D_e(s) = 22449s^4 + 118124s^2 + 40320$$

$$= 118124s^2 \left(1 + \underbrace{\frac{22449}{118124}}_{=0.19004605} s^2 \right) + 40320 \quad (3.24)$$

$$= 118124s^2 + 40320$$

$$\begin{aligned}
 D_o(s) &= 67284s^3 + 109584s \\
 &= 109584s \left(1 + \underbrace{\frac{67284}{109584}}_{=0.6139947} s^2 \right) \\
 &= 109584s
 \end{aligned} \tag{3.25}$$

$$D_2(s) = 118124s^2 + 109584s + 40320 \tag{3.26}$$

The 2nd reduced order model is given by using the Eqn. 3.13 and Eqn. 3.26

$$R_2(s) = \frac{N_2(s)}{D_2(s)} = \frac{185760s + 40320}{118124s^2 + 109584s + 40320} \tag{3.27}$$

3.1.3 Step response comparison

The systems, original, reduced by methods in literature and by proposed method are subjected to step response and compared as in Fig. 1. The simulation study with system is carried out in MATLAB 11b on computer configuration as Intel(R) Core(TM)2 Duo CPU T6400 @ 2 GHz. It can be seen that the peak overshoot of the response for original system is very high as compared to proposed reduced model. The step-response of the proposed reduced order model is better as compared to other reduced models. The step-response information of the reduced order models along with original system is enlisted in Table 1. The step-response parameters such as rise time, settling time, peak and peak overshoot are comparable to ABC method (Bansal et al, 2011) and are much improved as compared to PSO method (Panda et al, 2009). The ABC and PSO are the soft computing methods while the proposed method is classical even of that the method provides better results.

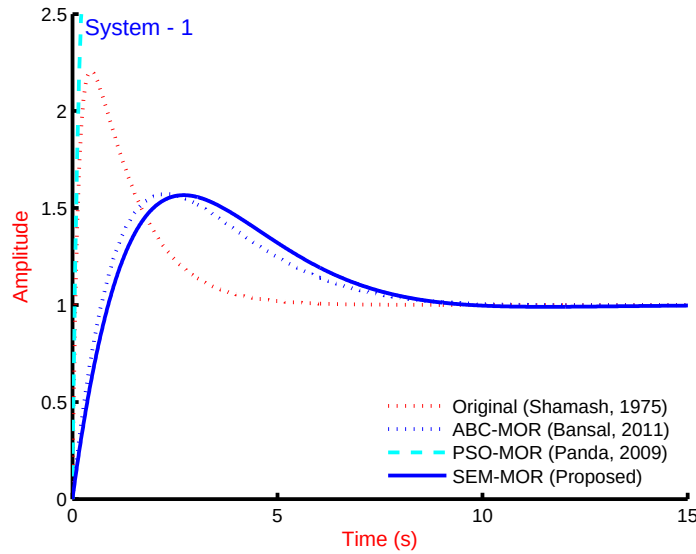


Figure 1: Step response of original system as in Eqn. 3.1, ROM as in Eqns. 3.2 - 3.3 and proposed ROM using Stability equation method as in Eqn. 3.27.

Table 1: Step response information of original system, ROM systems in literature and proposed ROM of system as System - 1.

System	Rise Time (s)	Settling Time (s)	Peak	Peak Time (s)
Original (Eqn. 3.1)	0.0569	4.8201	2.2305	0.4493
ABC-ROM (Eqn. 3.2)	0.5515	8.7371	1.5717	2.3235
PSO-ROM (Eqn. 3.3)	20.6376	37.8414	9.9937	74.1211
SE (Prop.) (Eqn. 3.27)	0.6862	8.7170	1.5662	2.7142

3.2 System - 2

Consider a 4th order example from literature survey as shown in Eqn. 3.28 (Mukherjee and Mishra, 1987).

$$G_4(s) = \frac{s^3 + 7s^2 + 24s + 24}{s^4 + 10s^3 + 35s^2 + 50s + 24} \quad (3.28)$$

3.2.1 ROM by methods in literature

The system in Eqn. 3.28 is reduced to the 2nd order using genetic algorithm and represented as following in Eqn. 3.29 (Desai and Prasad, 2013a).

$$G_2(s) = \frac{0.7645s + 1.689}{s^2 + 2.591s + 1.689} \quad (3.29)$$

It is again reduced to the 2nd order using sub-optimal concept in (Pati et al, 2014) and represented in Eqn. 3.30.

$$G_2(s) = \frac{s + 24.0096}{s^2 + 27.0096s + 24.0096} \quad (3.30)$$

3.2.2 ROM by proposed method

Reduction of numerator:

The numerator of the system - 2 is represented as in Eqn. 3.31 with its even and odd terms.

$$\begin{aligned} N(s) &= s^3 + 7s^2 + 24s + 24 \\ &= \underbrace{s^3 + 24s}_{\text{odd}} + \underbrace{7s^2 + 24}_{\text{even}} \end{aligned} \quad (3.31)$$

Step-1: Reduction of 3rd order numerator to its 1st order polynomial.

$$\begin{aligned} N(s) &= s^3 + 24s + 7s^2 + 24 \\ &= 24s \left(1 + \underbrace{\frac{1}{24}}_{=0.04167} s^2 \right) + 24 \left(1 + \underbrace{\frac{7}{24}}_{=0.29167} s^2 \right) \\ &= 24s + 24 \end{aligned} \quad (3.32)$$

Reduction of denominator:

The denominator of the system - 2 is represented as in Eqn. 3.33 with its even and odd terms of powers of s operator.

$$\begin{aligned} D(s) &= s^4 + 10s^3 + 35s^2 + 50s + 24 \\ &= \underbrace{s^4 + 35s^2 + 24}_{\text{even}} + \underbrace{10s^3 + 50s}_{\text{odd}} \end{aligned} \quad (3.33)$$

Step-1: Reduction of 4^{th} order denominator to its 2^{nd} order polynomial using application of SE method.

$$D(s) = 35s^2 \left(1 + \underbrace{\frac{1}{35}}_{=0.0285} s^2 \right) + 50s \left(1 + \underbrace{\frac{10}{50}}_{=0.2} s^2 \right) + 24 \quad (3.34)$$

$$= 35s^2 + 50s + 24$$

The 2^{nd} order reduced model by considering Eqn. 3.32 and Eqn. 3.2.2 is given as following in Eqn. 3.35.

$$R_2(s) = \frac{N_2(s)}{D_2(s)} = \frac{24s + 24}{35s^2 + 50s + 24} \quad (3.35)$$

3.2.3 Step response comparison

The response of 4^{th} order original system in (Mukherjee and Mishra, 1987) is compared to the response of 2^{nd} order reduced models presented in literature and derived by proposed SE method. The step response of these systems is shown in Fig. 2. It can be seen that the response of ROM with proposed method is retaining the properties of original system as in other models with new soft-computing methods. The step response data are enlisted in Table 2. It can be easily observed that the all parameters are equally relevant as with the original system.

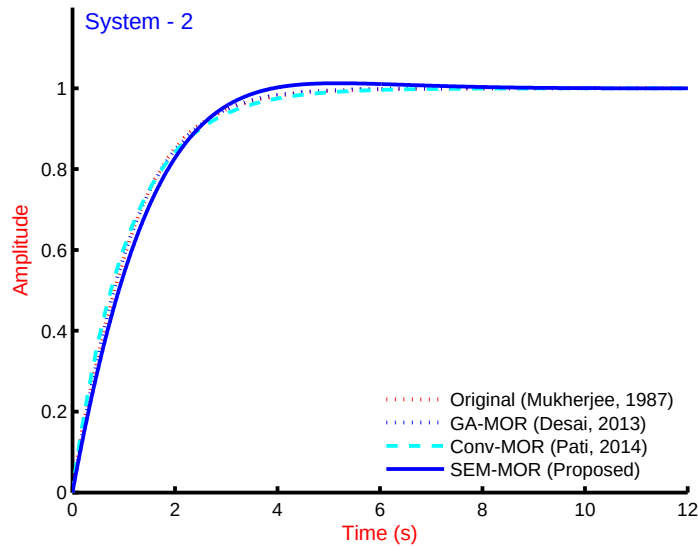


Figure 2: Step response of original system as in Eqn. 3.28, ROM as in Eqns. 3.29 - 3.30 and proposed ROM using Stability equation method as in Eqn. 3.35.

Table 2: Step response information of original system, ROM systems in literature and proposed ROM of system as System - 2.

System	Rise Time (s)	Settling Time (s)	Peak	Peak Time (s)
Original (Eqn. 3.28)	2.2602	3.9307	0.9991	6.9770
GA-ROM (Eqn. 3.29)	2.2616	3.8443	1.0000	9.6778
Conv-ROM (Eqn. 3.30)	2.3875	4.2478	0.9996	8.4934
SE (Prop.) (Eqn. 3.35)	2.3008	3.3764	1.0125	5.2144

3.3 System - 3

Consider a 4th order example from literature survey as shown in Eqn. 3.36 (Chen et al, 1980).

$$G_4(s) = \frac{28s^3 + 496s^2 + 1800s + 2400}{2s^4 + 36s^3 + 204s^2 + 360s + 240} \quad (3.36)$$

3.3.1 ROM by methods in literature

The system in Eqn. 3.36 is reduced to the 2nd order using genetic algorithm and represented as following in Eqn. 3.37 (Lodhwal and Jha, 2013).

$$R_2(s) = \frac{14s + 410.256}{s^2 + 1.785s + 1.19} \quad (3.37)$$

It is again reduced to the 2nd order using sub-optimal concept in (Chen et al, 1980) and represented in Eqn. 3.38.

$$R_2(s) = \frac{8.93s + 1.19}{s^2 + 1.785s + 1.19} \quad (3.38)$$

3.3.2 ROM by proposed method

Reduction of numerator:

The numerator of the system - 3 is represented as in Eqn. 3.36 with its even and odd terms of powers of s operator.

$$\begin{aligned} N(s) &= 28s^3 + 496s^2 + 1800s + 2400 \\ &= \underbrace{28s^3 + 1800s}_{\text{odd}} + \underbrace{496s^2 + 2400}_{\text{even}} \end{aligned} \quad (3.39)$$

Step-1: Reduction of 3rd order numerator to its 1st order polynomial is shown in Eqn. 3.40.

$$\begin{aligned} N(s) &= 1800s \left(1 + \underbrace{\frac{28}{1800}}_{0.0156} s^2 \right) + 2400 \left(1 + \underbrace{\frac{496}{2400}}_{0.20667} s^2 \right) \\ &= 1800s + 2400 \end{aligned} \quad (3.40)$$

Reduction of denominator:

The denominator of the system - 3 is represented as in Eqn. 3.41 with its even and odd terms of powers of s operator.

$$\begin{aligned} D(s) &= 2s^4 + 36s^3 + 204s^2 + 360s + 240 \\ &= \underbrace{2s^4 + 204s^2 + 240}_{\text{even}} + \underbrace{36s^3 + 360s}_{\text{odd}} \end{aligned} \quad (3.41)$$

Step-1: Reduction of 4th order denominator to its 2nd order polynomial using application of SE method.

$$D(s) = 204s^2 \left(1 + \underbrace{\frac{2}{204}}_{=0.0098} s^2 \right) + 360s \left(1 + \underbrace{\frac{36}{360}}_{0.10} s^2 \right) + 240 \quad (3.42)$$

$$= 204s^2 + 360s + 240$$

The 2nd order model of original system in Eqn. 3.36 is obtained by combining the numerator and denominator derived in Eqn. 3.40 and Eqn. 3.42.

$$R_2 = \frac{1800s + 2400}{204s^2 + 360s + 240} \quad (3.43)$$

3.3.3 Step response comparison

The 4th order system is reduced using stability equation method to the 2nd order system. The comparison of original system, reduced order systems by methods in literature and that of with proposed method based reduced order model. The step response information is enlisted in Table 3 and the graphical response comparison is shown in Fig. 3. It can be seen that the ROM in (Lodhwal and Jha, 2013) is not fulfilling the requirement of model order reduction. It is showing stable response but with very high steady-state error and settling time. The response that of with system in (Chen et al, 1980) is giving stable response and with steady-error. The response with original system and proposed reduced order model is reflecting almost with zero steady-state error. Therefore, it is an effective method in the arena of reduced order modeling of LTI systems.

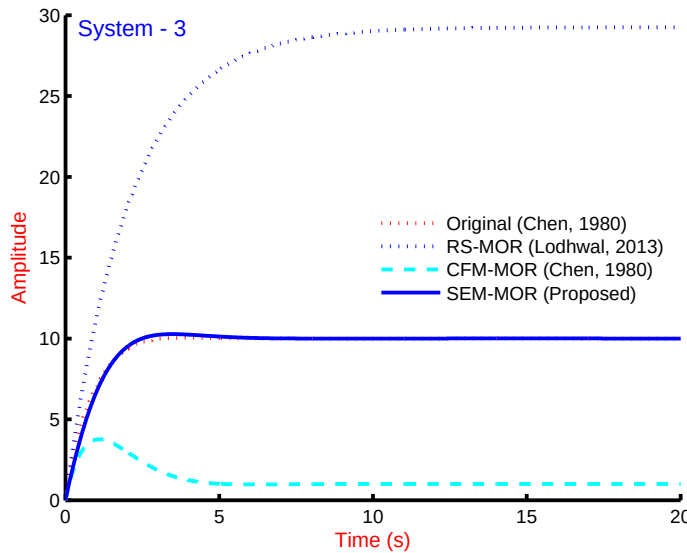


Figure 3: Step response of original system as in Eqn. 3.36, ROM as in Eqns. 3.37 - 3.38 and proposed ROM using Stability equation method as in Eqn. 3.43.

Table 3: Step response information of original system, ROM systems in literature and proposed ROM of system as System - 3.

System	Rise Time (s)	Settling Time (s)	Peak	Peak Time (s)
Original (Eqn. 3.36)	1.6920	2.5514	10.0443	3.9460
RSA-ROM (Eqn. 3.37)	4.5602	8.1197	29.2387	16.2215
CFM-ROM (Eqn. 3.38)	0.0990	4.6801	3.7664	1.1168
SEM (Prop.) (Eqn. 3.43)	1.6150	4.3379	10.2711	3.4483

4 Conclusion

The high order system is analyzed for its reduced order model using proposed stability equation method. The step response of the reduced order model is compared with the systems in literature and with original systems of higher order. The step response information with proposed method is comparable to original higher order system in terms of rise time, settling time, peak and peak time. Further more, it preserves the stability in a very low order system. It is very easy method in the field of model order reduction as compared to other methods available in literature.

References

- Alsmadi OMK, Abo-Hammour ZS (2015) A robust computational technique for model order reduction of two-time-scale discrete systems via genetic algorithms. *Computational Intelligence and Neuroscience* 2015:9, DOI 10.1155/2015/615079, URL <http://dx.doi.org/10.1155/2015/615079>
- Alsmadi OMK, Saraireh SS, Abo-Hammour ZS, Al-Marzouq AH (2014) Substructure preservation sylvester-based model order reduction with application to power systems. *Electric Power Components and Systems* 42(9):914–926, DOI 10.1080/15325008.2014.903543, URL <http://dx.doi.org/10.1080/15325008.2014.903543>, <http://dx.doi.org/10.1080/15325008.2014.903543>
- Appiah RK (1978) Linear model reduction using hurwitz polynomial approximation. *International Journal of Control* 28(3):477–488, DOI 10.1080/00207177808922472, URL <http://dx.doi.org/10.1080/00207177808922472>, <http://dx.doi.org/10.1080/00207177808922472>
- Bansal J, Sharma H, Arya K (2011) Model order reduction of single input single output systems using artificial bee colony optimization algorithm. In: Pelta D, Krasnogor N, Dumitrescu D, Chira C, Lung R (eds) *Nature Inspired Cooperative Strategies for Optimization (NICSO 2011)*, Studies in Computational Intelligence, vol 387, Springer Berlin Heidelberg, pp 85–100, DOI 10.1007/978-3-642-24094-2_6, URL http://dx.doi.org/10.1007/978-3-642-24094-2_6
- Chen TC, Chang CY, Han KW (1980) Model reduction using the stability-equation method and the continued-fraction method. *International Journal of Control* 32(1):81–94, DOI 10.1080/00207178008922845, URL <http://dx.doi.org/10.1080/00207178008922845>, <http://dx.doi.org/10.1080/00207178008922845>

- Desai SR, Prasad R (2013a) Implementation of order reduction on tms320c54x processor using genetic algorithm. In: Emerging Research Areas and 2013 International Conference on Microelectronics, Communications and Renewable Energy (AICERA/ICMiCR), pp 1–6, DOI 10.1109/AICERA-ICMiCR.2013.6576027, URL <http://dx.doi.org/10.1109/AICERA-ICMiCR.2013.6576027>
- Desai SR, Prasad R (2013b) A new approach to order reduction using stability equation and big bang big crunch optimization. Systems Science & Control Engineering 1(1):20–27, DOI 10.1080/21642583.2013.804463, URL <http://dx.doi.org/10.1080/21642583.2013.804463>, <http://dx.doi.org/10.1080/21642583.2013.804463>
- Gutman PO, Mannerfelt C, Molander P (1982) Contributions to the model reduction problem. IEEE Transactions on Automatic Control 27(2):454–455, DOI 10.1109/TAC.1982.1102930, URL <http://dx.doi.org/10.1109/TAC.1982.1102930>
- Hutton M, Friedland B (1975) Routh approximations for reducing order of linear, time-invariant systems. IEEE Transactions on Automatic Control 20(3):329–337, DOI 10.1109/TAC.1975.1100953, URL <http://dx.doi.org/10.1109/TAC.1975.1100953>
- Jiang YL, Chen HB (2012) Time domain model order reduction of general orthogonal polynomials for linear input-output systems. IEEE Transactions on Automatic Control 57(2):330–343, DOI 10.1109/TAC.2011.2161839, URL <http://dx.doi.org/10.1109/TAC.2011.2161839>
- Krishnamurthy V, Seshadri V (1978) Model reduction using the routh stability criterion. Automatic Control, IEEE Transactions on 23(4):729–731, DOI 10.1109/TAC.1978.1101805, URL <http://dx.doi.org/10.1109/TAC.1978.1101805>
- Lodhwal P, Jha S (2013) Performance comparison of different type of reduced order modeling methods. In: Third International Conference on Advanced Computing and Communication Technologies (ACCT, '13), pp 95–100, DOI 10.1109/ACCT.2013.25, URL <http://dx.doi.org/10.1109/ACCT.2013.25>
- Lucas T (1988) Differentiation reduction method as a multipoint pade approximant. Electronics Letters 24(1):60–61
- Lucas T (1992) A tabular approach to the stability equation method. Journal of the Franklin Institute 329(1):171 – 180, DOI [http://dx.doi.org/10.1016/0016-0032\(92\)90106-Q](http://dx.doi.org/10.1016/0016-0032(92)90106-Q), URL <http://www.sciencedirect.com/science/article/pii/001600329290106Q>
- Matko V (2004) Porosity determination by using two stochastic signals. Sensors and Actuators A: Physical 112(23):320 – 327, DOI <http://dx.doi.org/10.1016/j.sna.2003.10.065>, URL <http://www.sciencedirect.com/science/article/pii/S0924424703006344>
- Matko V, Koprivnikar J (1998) Quartz sensor for water absorption measurement in glass-fiber resins. IEEE Transactions on Instrumentation and Measurement 47(5):1159–1162, DOI 10.1109/19.746575, URL <http://dx.doi.org/10.1109/19.746575>
- Matko V, Donlagic D, Koprivnikar J (1994) Quartz sensor for water absorption measurement in glass-fiber resins. Sensors and Actuators A Physical 42(1):465–471, DOI 10.1016/0924-4247(94)80035-9, URL [http://dx.doi.org/10.1016/0924-4247\(94\)80035-9](http://dx.doi.org/10.1016/0924-4247(94)80035-9)
- Mukherjee S, Mishra R (1987) Order reduction of linear systems using an error minimization technique. Journal of the Franklin Institute 323(1):23 – 32, DOI [http://dx.doi.org/10.1016/0016-0032\(87\)90037-8](http://dx.doi.org/10.1016/0016-0032(87)90037-8), URL <http://www.sciencedirect.com/science/article/pii/0016003287900378>

- Panda S, Tomar SK, Prasad R, Ardil C (2009) Reduction of linear time-invariant systems using routh-approximation and pso. *International Journal of Electrical, Robotics, Electronics and Communications Engineering* 3(9):20–27
- Pati A, Kumar A, Chandra D (2014) Suboptimal control using model order reduction. *Chinese Journal of Engineering* 2014:5
- Sambariya DK, Prasad R (2012a) Differentiation method based stable reduced model of single machine infinite bus system with power system stabilizer. *International Journal of Applied Engineering Research* 7(11):2116 – 2120, URL http://gimt.edu.in/clientFiles/FILE_REP0/2012/NOV/24/1353741189722/202.pdf.
- Sambariya DK, Prasad R (2012b) Routh approximation based stable reduced model of single machine infinite bus system with power system stabilizer. In: DRDO-CSIR Sponsered: IX Control Instrumentation System Conference (CISCON - 2012), pp 85–93
- Sambariya DK, Prasad R (2012c) Routh stability array method based reduced model of single machine infinite bus with power system stabilizer. In: International Conference on Emerging Trends in Electrical, Communication and Information Technologies (ICECIT-2012), pp 27–34
- Sambariya DK, Prasad R (2012d) Stability equation method based stable reduced model of single machine infinite bus system with power system stabilizer. *International Journal of Electronic and Electrical Engineering* 5(2):101–106
- Sambariya DK, Prasad R (2012e) Stable reduced model of a single machine infinite bus power system. In: 17th National Power Systems Conference (NPSC-2012), pp 541–548
- Sambariya DK, Prasad R (2013) Stable reduced model of a single machine infinite bus power system with power system stabilizer. In: International Conference on Advances in Technology and Engineering (ICATE'13), pp 1–10, DOI 10.1109/ICAdTE.2013.6524762, URL <http://dx.doi.org/10.1109/ICAdTE.2013.6524762>
- Shamash Y (1975) Model reduction using the routh stability criterion and the pad approximation technique. *International Journal of Control* 21(3):475–484, DOI 10.1080/00207177508922004, URL <http://dx.doi.org/10.1080/00207177508922004>, <http://dx.doi.org/10.1080/00207177508922004>
- Sikander A, Prasad R (2015a) Linear time-invariant system reduction using a mixed methods approach. *Applied Mathematical Modelling* 39(16):4848 – 4858, DOI <http://dx.doi.org/10.1016/j.apm.2015.04.014>, URL <http://www.sciencedirect.com/science/article/pii/S0307904X15002504>
- Sikander A, Prasad R (2015b) A novel order reduction method using cuckoo search algorithm. *IETE Journal of Research* 61(2):83–90, DOI 10.1080/03772063.2015.1009396, URL <http://dx.doi.org/10.1080/03772063.2015.1009396>, <http://dx.doi.org/10.1080/03772063.2015.1009396>
- Sikander A, Prasad R (2015c) Soft computing approach for model order reduction of linear time invariant systems. *Circuits, Systems, and Signal Processing* 34(11):3471–3487, DOI 10.1007/s00034-015-0018-4, URL <http://dx.doi.org/10.1007/s00034-015-0018-4>
- Soloklo HN, Farsangi MM (2013) Multiobjective weighted sum approach model reduction by routh-pade approximation using harmony search. *Turk J Elec Eng & Comp Sci* 21(0):2283 – 2293, DOI 10.3906/elk-1112-31, URL <http://dx.doi.org/10.3906/elk-1112-31>

Soloklo HN, Nali O, Farsangi MM (2014) Model reduction by hermite polynomials and genetic algorithm. *Journal of mathematics and computer science* 9(0):188–202