

## **Original Research Article**

### **Theoretical Computation of Magnetic Field Density within the Vicinity of Rukpokwu 11 KVA Distribution Power Lines**

#### **Abstract**

In this study, we calculated the magnetic field exposure from extremely low frequency magnetic field around 11 kVA power distribution lines at Rukpokwu, Rivers State, Nigeria using theoretical and mathematical formulations. 32 sample points were considered at horizontal distances of between 1m and 1000m from the foot of the vertical pole subtending the electrical conductors. We used a mathematical software (Wolfram Mathematica 8.0) to generate the initial results of the magnetic field current coefficients ( $I_{coef}$ ) for the vertical and horizontal components of the magnetic fields and the total magnetic fields for  $x=1$  to 1000 m (horizontal distance from the foot of the pole) for a vertical height of 1 m above the ground surface (considered to be the average height of head positions of the workers and the public within the vicinity of magnetic field). The results showed that for horizontal distances of between 1 and 10m, the magnetic field exposures ranged from  $45.82 \mu T/hr$  to  $21.62 \mu T/hr$  and are above the occupational field exposure limit of  $21.0 \mu T/hr$  set by International Committee on Non Ionizing Radiation Protection (ICNIRP). Also, the results of field exposure for horizontal distances ranging from 1 to 20m were between  $45.82 \mu T/hr$  and  $8.3 \mu T/hr$  and are above the ICNIRP limit of  $4.2 \mu T/hr$  set for the public. It is suggested that between horizontal distances of 1 and 10m from the distribution lines, it is unsafe to build shops and do businesses and between the horizontal distances of 1 to 20m it is unsafe to build residential areas.

#### **1. Introduction**

When charges move, current flow is induced, consequently magnetic fields are created around the vicinity of the conductor where the current is flowing. Most high voltage power lines in Nigeria consist of vertically positioned brick cylindrical poles with 3 horizontally separated metallic conductors drawn on these poles which act as pathways for current. The current that flows across these horizontal conductors generate magnetic field. In the absence of a well calibrated magnetometer, theoretical estimation of the magnitude of the magnetic field intensity around these power lines is possible and recommendable. In recent years, due to technology and massive industrialization, and consequently greater need for power generation, electric power lines crisscross our cities, urban areas and the rural areas giving rise to extremely low magnetic fields in our environment.

Electric and magnetic fields are present around all wires carrying electricity; high voltage power lines, house wiring, or wires inside domestic appliances. The strength of the electric field depends on the voltage, while the strength of the magnetic field depends on the size of the current carried. [1] Low frequency electromagnetic field around electrical power substations is quasistatic with two component vector fields; the electric field caused by charges and eddy component of the magnetic field caused by currents. Calculation of field intensity of these fields at points away from the source (charges and currents) can be computed with thin-wired approximation. [2] Previous researchers had carried out theoretical calculations and experimental measurements of exposure of children living close to a major transmission line in Norway. The results revealed that children living close to a major transmission line had a greater exposure to magnetic fields than children living farther away. A fairly good correlation was also seen between measured and calculated exposure. [3] Exposure to magnetic fields was measured around the vicinity of 34.5 KV power distribution lines. The results were 0.2 to  $2.7 \mu T$ , 0.1 to  $0.5 \mu T$  and 0.1 to  $0.2 \mu T$  at 0 ft, 50 ft and 100 ft respectively from the wire lines. [4]

Computation of the magnetic field from the three phase 63 kV power transmission lines has been carried out by previous researchers using a new magnetic field simulation package- Marvdasht. The results of this study confirmed the environmental pollution of the magnetic field produced near transmission lines. By using the curves of magnetic field around the 63kV transmission lines obtained from software, they were able to determine the safe distance around the towers. [5] Studies on the effect of electromagnetic radiation emitted

from 400KV high voltage transmission lines on human health were carried out. The results ranged between 1.8 to 7.6  $\mu\text{T}$  and were in close agreement with measured values. [6]

In Nigeria, many persons are living and doing businesses under the transmission lines and are constantly exposed to the ELF electromagnetic fields. ELF measuring meters are not always available and even the available ones may not be routinely calibrated. In this work, we have adopted the basic Physics laws in calculating the magnetic field around 11 kV distribution lines to ascertain the prevailing magnetic field exposure of individuals who live and work around the power lines.

## 2. Methodology

### 2.1 Study Area

This study was carried out in Rukpokwu, Rivers State, Nigeria. This area is one of the emerging cities within the New Greater Port Harcourt Area of Rivers State with a very high population density and has become a be-hive of business and commercial activities. The area has a network of power distribution and transmission cables of power lines from both the national grid and the state power supplies. Many business activities and living houses are within the vicinity of 11 kVA power lines. Figure 1 shows the picture of people doing businesses under the power lines.



Figure 1. People doing business under 11 kVA power lines along Rukpokwu, Nigeria

### 2.2. Theoretical Formulations and Computations

Our theory was based on the Ampere's law;  $\oint Bdl = \mu_0 I$  (1)

Where the line integral is over any arbitrary loop,  $I$  is the current enclosed by the loop and  $\mu_0$  is the permeability constant for free space.

The magnetic field generated by 11 kV distribution line was calculated at 1m above the ground. The wires were assumed to be perfectly arranged horizontally.

Let the average conductor height (from the ground level) be 10.37 m and the distance of separation between the two external wires (conductors) from the central wire be designated  $z$  (0.17m). Let the magnetic field ( $B$ ) for one conductor be perpendicular to the radius of its circular magnetic field lines. Let this magnetic field vector be resolved into the horizontal components, and vertical components. The positions of the observation point and that of the wire are described using XY coordinates. This is illustrated in Figure 2.

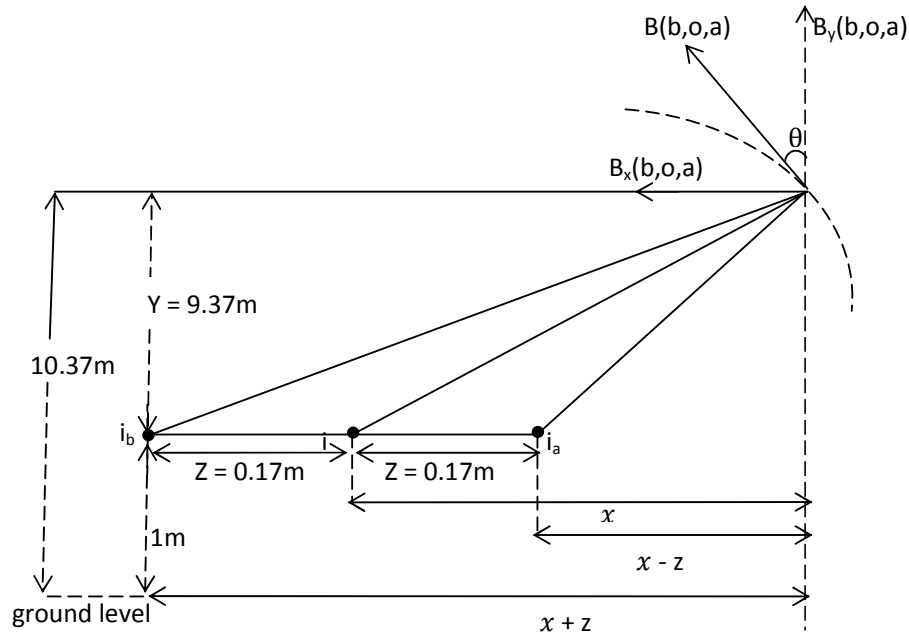


Figure 2: Geometry of the magnetic field for the 3 phase currents ( $i_b$ ,  $i$  and  $i_a$ )

Integrating (1), we have  $\mathbf{B} = \frac{i\mu_0}{2\pi r}$  (2)

$$\mathbf{B} = \frac{i\mu_0}{2\pi (x^2 + y^2)^{1/2}} \quad (3)$$

Considering Figure 1, let the horizontal and vertical components of  $\mathbf{B}$  be represented by (4) and (5);

$$\mathbf{B}_x = -\mathbf{B} \sin \theta \quad (4)$$

$$\mathbf{B}_y = \mathbf{B} \cos \theta \quad (5)$$

$$\text{From (3) and (4), we have, } \mathbf{B}_x = -\frac{i\mu_0}{2\pi (x^2 + y^2)^{1/2}} \frac{y}{(x^2 + y^2)^{1/2}} = -\frac{i\mu_0 y}{2\pi (x^2 + y^2)} \quad (6)$$

$$\text{Equivalently, combining (3) and (5) gives } \mathbf{B}_y = \frac{i\mu_0 x}{2\pi (x^2 + y^2)} \quad (7)$$

For our distribution line under consideration with 3 phase conductors as shown in Figure 2, the two external wires are horizontally separated from the central wire (carrying current  $i$ ) by  $z = 0.17$  m. Where  $i$ ,  $i_a$  and  $i_b$  are the three-phase circuit current.

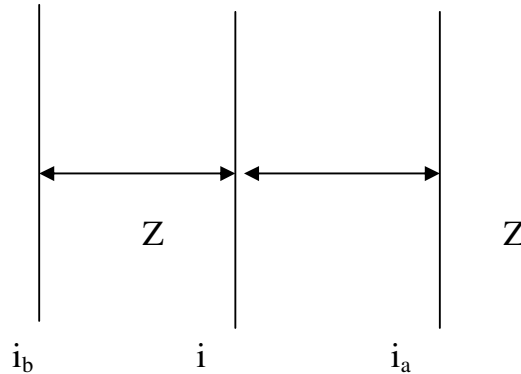


Figure 3. The three horizontally arranged conductors separated by a distance  $z = 0.17$  m.

In computing the magnetic field components produced by the current  $i_a$  and  $i_b$  for the two external wires, the geometry is the same as the magnetic field components produced by  $i$  with  $x$  component replaced by  $(x - z)$  and  $(x + z)$  for  $i_a$  and  $i_b$  respectively. Thus, for external wire carrying  $i_a$ , the two field components are;

$$\mathbf{B}_{xa} = -\frac{i_a \mu_0 y}{2\pi\{(x-z)^2 + y^2\}} \quad (8)$$

$$\mathbf{B}_{ya} = \frac{i_a \mu_0 (x-z)}{2\pi\{(x-z)^2 + y^2\}} \quad (9)$$

Similarly, for external wire carrying  $i_b$ , the two field components are;

$$\mathbf{B}_{xb} = -\frac{i_b \mu_0 y}{2\pi\{(x+z)^2 + y^2\}} \quad (10)$$

$$\mathbf{B}_{yb} = \frac{i_b \mu_0 (x+z)}{2\pi\{(x+z)^2 + y^2\}} \quad (11)$$

Note that we shall be referring to the coefficients of the current terms in equations (6) to (11) as current coefficient terms for the respective magnetic field components.

In order to transform the 3 phase currents ( $i$ ,  $i_a$  and  $i_b$ ) into a single RMS current  $I$ , we took cognizance of the fact that the 3 phase systems produce magnetic fields that rotate in specified directions. These 3 phase wires carrying alternating current of same frequency reach their instantaneous peak values such that  $i_a$  leads  $i$  by  $120^\circ$  and  $i_b$  lags  $i$  by  $120^\circ$  [5]. These are represented in the phase diagram of Figure 4.

Therefore,  $i = I \sin wt$  (12)

$i_a = I \sin (wt + 120^\circ)$  (13)

$i_b = I \sin (wt - 120^\circ)$  (14)

Considering Figure 3 and resolving the currents in phase and out of phase in terms of current  $I$ , we have the results in Table 1.

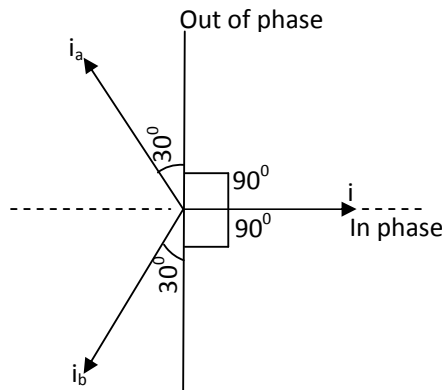


Figure 4: Resolution of the 3- phase currents into a single RMS current,  $I$

Table 1. In-phase and out of phase current in terms of RMS current,  $I = 19.13$  A (the values of current in Table 1 are referred to as current factors).

Phase currents	$I_b$	$i$	$I_a$
I-in	$-\frac{1}{2}I = -9.57$ A	$I = 19.13$	$-\frac{1}{2}I = -9.57$ A
I-out	$-\frac{\sqrt{3}}{2}I = -9.57$ A	0	$\frac{\sqrt{3}}{2}I = 16.57$ A

From Table 1 above, we can determine for each current, the in-phase vertical, out of phase vertical, in-phase horizontal and the out of phase horizontal components of magnetic field by multiplying magnetic field current coefficients by the appropriate current factors.

Therefore the three-out-of phase vertical components of magnetic field for each of the three currents ( $i$ ,  $i_a$  and  $i_b$ ) will be computed using the current factors in Table 1; For  $i$ ,

$$B_y \text{ out} = \frac{0\mu_0 x}{2\pi(x^2+y^2)} = 0 \quad (15)$$

Doing the same for  $I_a$  and  $I_b$ ;

$$B_{ya} \text{ out} = \frac{16.57 \mu_0 (x-z)}{2\pi\{(x-z)^2+y^2\}} \quad (16)$$

$$B_{yb} \text{ out} = \frac{-16.57\mu_0(x+z)}{2\pi\{(x+z)^2+y^2\}} \quad (17)$$

Therefore total  $B_y$ -out will be given as;

$$B_y \text{ out-T} = \frac{16.57 \mu_0}{2\pi} \left\{ \frac{(x-z)}{\{(x-z)^2+y^2\}} - \frac{(x+z)}{\{(x+z)^2+y^2\}} \right\} \quad (18)$$

The three in- phase vertical components for each of the three current ( $i$ ,  $i_a$  and  $i_b$ ) were computed using similar procedure and adopting the current factors in Table 1;

Therefore total  $B_y$  in- phase will be given as;

$$B_y \text{ in-T} = \frac{-9.57 \mu_0}{2\pi} \left\{ \frac{(x-z)}{\{(x-z)^2+y^2\}} + \frac{(x+z)}{\{(x+z)^2+y^2\}} \right\} + \frac{19.13 \mu_0 x}{2\pi(x^2+y^2)} \quad (19)$$

Similarly, total  $B_x$  out of phase will be given as;

$$B_x \text{ out-T} = -\frac{16.57\mu_0 y}{2\pi\{(x-z)^2+y^2\}} + \frac{16.57\mu_0 y}{2\pi\{(x+z)^2+y^2\}} \quad (20)$$

Also, total  $B_x$  in- phase will be given as;

$$B_x \text{ in-T} = \frac{9.57 \mu_0}{2\pi} \left\{ \frac{y}{\{(x-z)^2+y^2\}} + \frac{y}{\{(x+z)^2+y^2\}} \right\} - \frac{19.13 \mu_0 x}{2\pi(x^2+y^2)} \quad (21)$$

The square of the grand sum of all the component magnetic fields both in- phase and out of phase is the sum of the squares of equations (18) to (21);

$$B_T^2 = B_y^2 \text{ out-T} + B_y^2 \text{ in-T} + B_x^2 \text{ out-T} + B_x^2 \text{ in-T} \quad (22)$$

$$\text{Hence, } \mathbf{B_T} = (B_y^2 \text{out} - T + B_y^2 \text{in} - T + B_x^2 \text{out} - T + B_x^2 \text{in} - T)^{1/2} \quad (23)$$

We went further to adopt a mathematical software (Wolfram Mathematica 8.0) which enabled us facilitate the generation of the results of the magnetic field current coefficients ( $I_{\text{coef}}$ ) for the vertical and horizontal components of the magnetic fields (both in-phase and out of phase) for  $x=1\text{m}$  to  $1000\text{ m}$  (horizontal distance from the foot of the pole) for a vertical height of  $1\text{ m}$  above the ground surface (presumed to be the average height of head positions of those who live and do business within the vicinity of the understudied magnetic field). This software also enabled us to calculate the total magnetic field for  $x=1\text{m}$  to  $1000\text{ m}$ . In carrying out these computations, we used the parameters collected from Power Holdings Company of Nigeria (PHCN). These parameters include; Power =  $11\text{ kVA}$ , Line voltage =  $415\text{V}$ , Height of pole =  $10.37\text{m}$ , Distance between central horizontal conductor and the two external horizontal conductors ' $z$ ' =  $0.17\text{m}$ . The current in the horizontal conductor ' $I$ ', was calculated using the Expression;

$$I = \frac{\text{Power}}{V \cos \theta \sqrt{3}} = 19.13\text{ A} \quad (24)$$

(Where Power =  $VI \cos \theta \times \sqrt{3}$  and  $\cos \theta$  (power factor) =  $0.8$ )

### 3. Results

The results of the magnetic field current coefficients ( $I_{\text{coef}}$ ) for the vertical and horizontal components of the magnetic fields (both in-phase and out of phase) for  $x=1\text{m}$  (horizontal distance from the foot of the pole) for a vertical height of  $1\text{ m}$  above the ground surface are presented in Table 2. Summary of the results of the component magnetic fields for the various phases and their corresponding total magnetic fields are presented in Table 3. The results of the computed total magnetic field exposure are presented in Table 4. We have assumed that the computed magnetic fields are generated per second, therefore all the results are expressed as magnetic field exposure in Tesla per second (T/s). In order to convert from  $\mu\text{T/sec}$  to  $\mu\text{T/hr}$  we have used;

$$1\text{ } \mu\text{T/hr} = \mu\text{T/sec} \times 3600 \quad (25)$$

We presented the relationship between magnetic field exposures in  $\mu\text{T/hr}$  against the corresponding horizontal distances in meters in Figure 5. A comparison between the results of the calculated magnetic field exposure in  $\mu\text{T/hr}$  and the standard limits established by International Committee on Non Ionizing Radiation Protection (ICNIRP) has been presented in Table 5. We assumed occupational and public exposure limits of  $500\text{ } \mu\text{T/day}$  and  $100\text{ } \mu\text{T/day}$  respectively as set by ICNIRP 1998 guidelines [7] which we computed to be approximately equal to  $21\text{ } \mu\text{T/hr}$  and  $4.2\text{ } \mu\text{T/hr}$  for occupational and public exposure limits respectively.

Table 2. Results of the magnetic field current coefficients ( $I_{\text{coef}}$ ) for the vertical and horizontal components of the magnetic fields (both in-phase and out of phase) for  $x=1\text{m}$

B- Phase	Current	A	B	C	Icoef.	I	Magnetic Field Icoef. * I
By. Out	Ib	x+y	x+y	y	2.00E-10	-16.57	-3.31E-09
	i	X	x	y	2.00E-10	0	0
	Ia	x-z	x-z	y	2.00E-10	16.57	3.31 E-09
By. In	Ib	x+y	x+y	y	2.00E-10	-9.57	-1.91E-09
	i	X	x	y	2.00E-10	19.13	3.83E-09
	Ia	x-z	x-z	y	2.00E-10	-9.57	-1.91416E-09
Bx. Out	Ib	Y	x+z	y	1.87E-12	-16.57	-3.10389E-11
	i	Y	x	y	1.87E-12	0	0

<b>B<sub>x</sub>. In</b>	<b>I<sub>a</sub></b>	Y	x-z	y	1.87E-12	16.57	3.11E-11
	<b>I<sub>b</sub></b>	Y	x+z	y	1.87E-12	-9.57	-1.79265E-11
	<b>i</b>	Y	x	y	1.87E-12	19.13	3.58E-11
	<b>I<sub>a</sub></b>	Y	x-z	y	1.87E-12	-9.57	-1.79387E-11

Table 3. Summary of the total magnetic field for the different phases and the total magnetic fields for X =1 m to 1000 m

S/n	X (m)	<b>By Out<sub>T</sub></b>	<b>By In<sub>T</sub></b>	<b>BxOut<sub>T</sub></b>	<b>Bxin<sub>T</sub></b>	<b>B<sup>2</sup><sub>T</sub></b>	<b>B<sub>T</sub> (Tesla)</b>
1	<b>1</b>	-1.20E-08	1.00E-09	4.00E-09	1.00E-09	1.62E-16	1.26853E-08
2	<b>2</b>	-1.12E-08	-2.74E-11	4.32E-09	-6.35E-10	1.45E-16	1.20218E-08
3	<b>5</b>	-5.60E-09	5.00E-10	8.30E-09	-1.56E-09	1.03E-16	1.01456E-08
4	<b>10</b>	3.89E-10	-7.90E-11	5.99E-09	-1.33E-10	3.61E-17	6.00461E-09
5	<b>15</b>	1.58E-09	-9.35E-11	3.24E-09	-7.97E-11	1.30E-17	3.60681E-09
6	<b>20</b>	1.48E-09	-8.42E-11	1.775E-09	-4.84E-11	5.35E-18	2.31311E-09
7	<b>30</b>	9.38E-10	-6.29E-11	6.492E-10	-2.23E-11	1.31E-18	1.1427E-09
8	<b>40</b>	5.982E-10	-4.87E-11	2.965E-10	-1.21E-11	4.48E-19	6.69532E-10
9	<b>50</b>	4.059E-10	-3.93E-11	1.577E-10	-8.02E-12	1.91E-19	4.37302E-10
10	<b>60</b>	2.909E-10	-3.30E-11	9.316E-11	-5.3E-12	9.44E-20	3.07276E-10
11	<b>70</b>	2.179E-10	-2.84E-11	5.941E-11	-3.88E-12	5.18E-20	2.27665E-10
12	<b>80</b>	1.69E-10	-2.48E-11	4.013E-11	-2.96E-12	3.08E-20	1.75486E-10
13	<b>90</b>	1.346E-10	-2.21E-11	2.835E-11	-2.33E-12	1.94E-20	1.39337E-10
14	<b>100</b>	1.097E-10	-2E-11	2.075E-11	-1.89E-12	1.29E-20	1.13438E-10
15	<b>110</b>	9.11E-11	-1.81E-11	1.56E-11	1.55E-12	8.87E-21	9.41944E-11
16	<b>120</b>	7.69E-11	-1.67E-11	1.20E-11	-1.31E-12	6.34E-21	7.96114E-11
17	<b>130</b>	6.52E-11	-1.54E-11	9.52E-12	-1.11E-12	4.58E-21	6.76762E-11
18	<b>140</b>	5.68E-11	-1.43E-11	7.63E-12	-9.55E-13	3.49E-21	5.9075E-11
19	<b>150</b>	4.95E-11	-1.33E-11	6.21E-12	-8.39E-13	2.67E-21	5.16373E-11
20	<b>160</b>	4.36E-11	-1.24E-11	5.03E-12	-7.33E-13	2.08E-21	4.56131E-11
21	<b>170</b>	3.86E-11	-1.18E-11	4.27E-12	-6.55E-13	5.94E-21	7.70564E-11
22	<b>180</b>	3.45E-11	-1.12E-11	3.60E-12	-5.80E-13	1.33E-21	3.64554E-11
23	<b>190</b>	3.10E-11	-1.58E-11	3.06E-12	-5.25E-13	1.22E-21	3.49321E-11
24	<b>200</b>	2.80E-11	-1.01E-11	2.63E-12	-4.69E-13	8.93E-22	2.98854E-11
25	<b>300</b>	4.10E-12	-2.22E-12	7.72E-13	-2.09E-13	2.24E-23	4.73055E-12
26	<b>400</b>	6.06E-12	-5.76E-12	2.95E-13	-1.54E-13	7.00E-23	8.36731E-12
27	<b>500</b>	3.58E-12	-4.02E-12	1.19E-13	-1.23E-13	2.90E-23	5.38573E-12
28	<b>600</b>	3.08E-12	-1.11E-12	9.79E-14	-9.96E-14	9.93E-24	9.96638E-12
29	<b>700</b>	2.30E-12	-2.85E-12	6.15E-14	-3.82E-14	1.34E-23	3.66302E-12
30	<b>800</b>	5.87E-13	-2.50E-12	4.12E-14	-2.93E-14	6.60E-24	2.56849E-12

31	<b>900</b>	1.37E-12	-2.27E-12	2.90E-14	-2.31E-14	7.03E-24	2.65164E-12
32	<b>1000</b>	1.12E-12	-2.01E-12	2.11E-14	-1.87E-14	5.30E-24	2.30115E-12

242

243


244

245

**Table 4: The Rate of Magnetic Field Exposures for Specified Horizontal Distances from the Central Conductor**

S/n	HORIZONTAL DISTANCE (X, m)	Field Exposure T/sec	Field Exposure μT/sec	Field Exposure μT/hr
1	1	1.27E-08	1.27E-02	45.82
2	2	1.20218E-08	1.20E-02	43.28
3	5	1.01456E-08	1.01E-02	36.52
4	10	6.00461E-09	6.00E-03	21.62
5	15	3.60681E-09	3.61E-03	12.98
6	20	2.31311E-09	2.31E-03	8.33
7	30	1.1427E-09	1.14E-03	4.11
8	40	6.69532E-10	6.70E-04	2.41
9	50	4.37302E-10	4.37E-04	1.57
10	60	3.07E-10	3.07E-04	1.11
11	70	2.28E-10	2.28E-04	0.82
12	80	1.75486E-10	1.75E-04	0.63
13	90	1.39337E-10	1.39E-04	0.50
14	100	1.13438E-10	1.13E-04	0.41
15	110	9.41944E-11	9.42E-05	0.34
16	120	7.96114E-11	7.96E-05	0.29
17	130	6.76762E-11	6.77E-05	0.24
18	140	5.9075E-11	5.91E-05	0.21
19	150	5.16373E-11	5.16E-05	0.19
20	160	4.56131E-11	4.56E-05	0.16
21	170	7.70564E-11	7.71E-05	0.28
22	180	3.64554E-11	3.65E-05	0.13
23	190	3.49321E-11	3.49E-05	0.13
24	200	2.98854E-11	2.99E-05	0.11
25	300	4.73055E-12	4.73E-06	0.02
26	400	8.36731E-12	8.37E-06	0.03
27	500	5.38573E-12	5.39E-06	0.02
28	600	9.96638E-11	9.97E-05	0.36
29	700	3.66302E-12	3.66E-06	0.01
30	800	2.56849E-12	2.57E-06	0.01
31	900	2.65164E-12	2.65E-06	0.01
32	1000	2.30115E-12	2.30E-06	0.01

246

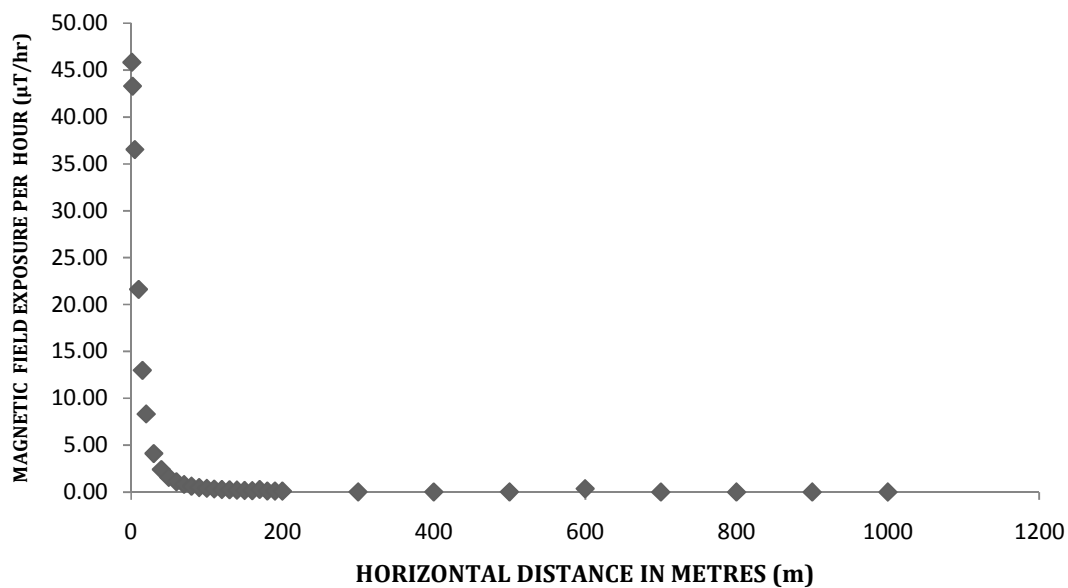

247

248 Figure 5: Relationship between magnetic field exposure and the horizontal distance away from the conductor

249

250 **Table 5: Comparison of Magnetic field exposure in micro Tesla per hour ( $\mu\text{T/hr}$ ) with the international**  
 251 **standard limits.**

s/n	HORIZONTAL DISTANCE X (m)	$\mu\text{T/hr}$	ICNRIP LIMIT	
			PUBLIC $\mu\text{T/hr}$	Occupational $\mu\text{T/hr}$
1	1	45.82	4.2	21
2	2	43.28	4.2	21
3	5	36.52	4.2	21
4	10	21.62	4.2	21
5	15	12.98	4.2	21
6	20	8.33	4.2	21
7	30	4.11	4.2	21
8	40	2.41	4.2	21
9	50	1.57	4.2	21
10	60	1.11	4.2	21
11	70	0.82	4.2	21
12	80	0.63	4.2	21

13	90	0.50	4.2	21
14	100	0.41	4.2	21
15	110	0.34	4.2	21
16	120	0.29	4.2	21
17	130	0.24	4.2	21
18	140	0.21	4.2	21
19	150	0.19	4.2	21
20	160	0.16	4.2	21
21	170	0.28	4.2	21
22	180	0.13	4.2	21
23	190	0.13	4.2	21
24	200	0.11	4.2	21
25	300	0.02	4.2	21
26	400	0.03	4.2	21
27	500	0.02	4.2	21
28	600	0.36	4.2	21
29	700	0.01	4.2	21
30	800	0.01	4.2	21
31	900	0.01	4.2	21
32	1000	0.01	4.2	21

252

---

253 4. Discussions

254 The results of the the magnetic field current coefficients ( $I_{coef}$ ) for the vertical and horizontal components of  
255 the magnetic fields (both in-phase and out of phase) for  $x=1m$  have been successfully computed using Wolfram  
256 Mathematica 8.0 software and have been presented in Table 2. The product of  $I_{coef}$  and  $I$  for each of the phases  
257 enabled us to compute the magnetic fields in Tesla. On application of Wolfram Mathematica 8.0 software,  
258 inputting  $x = 1m$  to 1000 m, the equivalent magnetic fields in Tesla were generated automatically. This  
259 application software helped us to overcome the rigours of computing each of the magnetic fields manually for  
260 the numerous horizontal distances ( $x = 1m$  to 1000 m) from the conductors considered in this work.

261  
262 Table 3 presents the summary of the total magnetic field for the different phases and the total magnetic fields for  
263  $X = 1m$  to 1000 m as computed using Wolfram Mathematica 8.0 software. The results ranged from  $1.26853E-08$   
264 to  $2.30115E-12$  Tesla for  $x = 1m$  to  $x = 1000m$  respectively, implying a decline in the magnitude of total  
265 magnetic field with respect to increase in horizontal distances away from the foot of the pole.

266 In Table 4, the results of the rate of magnetic field exposures presented for the various horizontal distances from  
267 the central conductor ( $x = 1m$  to  $x = 1000m$ ) ranged from  $45.8\mu T/hr$  to  $0.01\mu T/hr$ . For  $x = 1$  to 20 m, the  
268 magnetic field exposure exceeded the standard limits of  $4.2\mu T/hr$  and  $21\mu T/hr$  set by ICNIRP for both public  
269 and occupational areas respectively [7]. These values suggest that within the horizontal distances of between 1  
270 to 20 m, people should not build residential houses. Within the range of 1 to 10 m, we have values above the  
271 standard limit of  $21.0\mu T/hr$  set by ICNIRP (1998) for the occupational area [7]. Also, these values suggest that  
272 people should not do business close to the power lines to avoid undue exposure to magnetic fields.  
273 From the results, the horizontal distances of  $x=30m$  to  $x=1000m$  have magnetic field exposures below the  
274 standard limits set by ICNIRP. It follows that within these horizontal distances, it is safe for people to reside and  
275 also do their businesses.

276 Figure 5 shows a decrease in the magnetic field exposure as the horizontal distances from the conductor  
277 increase. This fact is demonstrated in the exponential decay curve of the magnetic field exposure against the  
278 horizontal distances. It shows that at horizontal distances well above  $x = 200m$ , the magnetic field exposure  
279 remains relatively uniform as the horizontal distances increased. This indicates that the magnetic field exposures  
280 within these horizontal distances are too small to have any significant impact or changes on the public and  
281 occupationally exposed persons. In a similar work done by Adnan using 400 kVA high voltage power lines, he

computed a range of magnetic field exposure values of between 7.6 $\mu$ T/hr and 1.8 $\mu$ T/hr while the measured values ranged from 7.36 $\mu$ T/hr to 1.7 $\mu$ T/hr respectively. He showed from these results that the calculated values agreed with the measured values. The results of the present research fall within this range [6].

## 5. Conclusion

In this research, we have calculated the magnetic field exposure from extremely low frequency magnetic field around 11 kVA power distribution lines at Rukpokwu, Rivers State, Nigeria using theoretical and mathematical formulations. The results showed that for horizontal distances of between 1 and 10m, the magnetic field exposures ranged from 45.82  $\mu$ T/hr to 21.62  $\mu$ T/hr and are above the occupational field exposure limit of 21.0  $\mu$ T/hr set by International Committee on Non Ionizing Radiation Protection (ICNIRP). Also, the results of field exposure for horizontal distances ranging from 1 to 20m were between 45.82  $\mu$ T/hr and 8.3  $\mu$ T/hr and are above the ICNIRP limit of 4.2  $\mu$ T/hr set for the public. It is suggested that between horizontal distances of 1 and 10m from the distribution lines, it is unsafe to build shops and do businesses and between the horizontal distances of 1 to 20m it is unsafe to build residential areas.

## Reference

- [1] National Radiation Laboratory, 2008. Ministry of Health, 108 Victoria Street, Christchurch, New Zealand (03) 366 5059, [www.nrl.moh.govt.nz](http://www.nrl.moh.govt.nz)
- [2] Hidajet Salkic, Amir Softic, Adnan Muharemovic, Irfan Turkovic and Mario Klaric (2012). Calculation and Measurement of Electromagnetic Fields, Electromagnetic Radiation, Prof. S. O. Bashir (Ed.), ISBN: 978-95351-0639-5, InTech, Available from: <http://www.intechopen.com/books/electromagnetic-radiation/calculationand-measurement-of-electromagnetic-fields>
- [3] A. I. Vistnes, G. B. Ramberg, L. R. Bjørnevik, T. Tynes and T. Haldorsen. Exposure of Children to Residential Magnetic Fields in Norway, Bioelectromagnetics 18:47–57, 1997.
- [4] Long Island Power Authority, Magnetic Field, 2013. Magnetic Field Levels around Homes. Retrieved on 14/06/2016 from [www.saunasandstuff.com](http://www.saunasandstuff.com)
- [5] Mehdi, N., Ghahraman, S and Masoud J, MAGNETIC FIELD CALCULATION OF 63KV TRANSMISSION LINES, IJRRAS 17 (2), November 2013, [www.arpapress.com](http://www.arpapress.com)
- [6] Adnan, M.K., 2013. Investigation and Study the Effect of Electromagnetic Radiation Emitted from 400KV High Voltage Transmission Lines on Human Health. Tikrit Journal of Pure Science, 18 (3) 135- 137
- [7] National Radiation Laboratory, 2008. Electrical and Magnetic Fields and Your Health, Ministry of Health, 108 Victoria Street, Christchurch, New Zealand, Retrieved on 10/10/2016 from [www.nrl.moh.govt.nz](http://www.nrl.moh.govt.nz)