

1
2
3
4
5
6

7
8
9
10
11
12
13

14
15
16

17

Original Research Article
**An outline for Economical and Technical
Analysis of Photovoltaic Cells for Agricultural
Uses: A case study on Texas weather
conditions**

ABSTRACT

Aims: Outline the steps need to realize an economical and technical evaluation of solar photovoltaic (PV) systems in agriculture.

Study design: Using the outline proposed for the analysis of biochar GaAs and Si solar panels were evaluated under Texas weather conditions.

Place and Duration of Study: Bioenergy Testing Laboratory (BETALab) between (January and August 2013), College Station, Texas.

Methodology: The study includes an outline on how to do a technical and simple economic comparison, the outline includes the solar panel efficiency, required area, installations and power generation costs and simple payback period. The data was used to evaluate which type of solar panel generates the best cost-benefit characteristics to a small farmer or rancher in Texas. To exhibit the useful of the outline, in this study, two different photovoltaic systems were compared the traditional silicon (Si) photovoltaic (PV) cell and the gallium arsenide (GaAs) PV cell. The solar panels were compared simultaneously, taking measurements of voltage and current automatically in College Station, Texas.

Results: The gallium arsenide solar panel showed higher conversion efficiency (18.36% versus 14.02% for the Si); however, it also has a reported higher capital cost (\$3/Wp versus \$2/Wp for the Si). The study suggested that both panels are viable alternatives for energy independence in a small farm or ranch application. The final selection will depend on the economic alternatives and power necessities of the farmer or rancher. In this study, the GaAs have provided less payback period (6.8 years) compared with 7.5 years for the Si units using various assumptions. The 4% improvement in efficiency of the GaAs unit translated into a better payback period despite its slightly higher initial installed cost.

Conclusion: The technical and economical outline proposed in this paper was useful to decide between GaAs and Si panels using basic economic assumptions. However, this paper did not recommend a specific solar panel over the other in every situation. Each situation need to be analyzed individually taking in consideration geographical situation, government subsidies, rebates and tax credits.

Keywords: *Economic analysis, Technical analysis; Gallium Arsenide photovoltaic cell; Silicon photovoltaic cell; Efficiency.*

1. INTRODUCTION

The energy potential in Texas is one of the largest in the United States, with abundant wind, solar, and biomass resources in different regions across the state. In 2010, the renewable energy in Texas accounted 3.9% of the total energy consumed in the state. From the renewables energies used in the U.S., solar energy was responsible of 2% of the renewable energy total in 2011 (The State of Texas 2012). Besides this low percentage, the solar energy industry is growing rapidly, example of that is the growing in 2010 (29%) and 2011 (25%) (The State of Texas 2012). The state of Texas is ranked nationally as No. 1 in solar energy potential and No. 13 in installed solar photovoltaic capacity (House Research Organization 2010). The large potential that the state of Texas possesses for solar energy opens many opportunities to develop new types of technologies and improve conventional ones.

In Texas, agriculture is one of the most important industries being the No. 1 state for total livestock and livestock products receipts, and the No. 2 state for agricultural receipts (USDA 2009). This high agricultural production is related with economical expenses which are principally connected with water, chemicals, and energy consumption. The energy consumption in a cattle farm can be between 300 and 1200 kw per cow/year (Granted Consultancy 2012). The energy expenses can be reduced in the agricultural practices by the usage of solar energy as principal energy resource or as a supplementary source. The implementation of solar energy as power source in an agricultural system is a possibility for Texan farmers because the high solar potential and the federal and state benefits allow the implementation of this technology (The State of Texas 2012).

Farmers have great opportunities to be favored for the solar energy in terms of governmental benefits and environmental and economic revenues. However, they need to select the best type of solar technology that best fits his economic and technical necessities. In that way, this paper outlined the necessary steps to perform a technical an economical evaluation of solar panels. This outline can be used as a tool by agricultural and biological engineers, Agricultural Systems Management or another agriculture related profession around the world without need of extensive knowledge in the operation of photovoltaic panels.

As example of the implementation of this outline; in this paper, two types of photovoltaic cells were evaluated. PV cells are glass covered semiconductor cells which can convert sunlight directly into electric energy. The PV cells can be produced from different materials, generating different characteristics, advantages, and prices (Razykov et al. 2011). The traditional PV cells have been formed using crystalline silicon, a less expensive material with reasonable performance (Andreev et al. 2004). Today, new PV cells have been developed trying to achieve higher efficiencies than silicon PV cells. The Gallium Arsenide (GaAs) solar panel is recognized as a very efficient panel (Andreev et al. 2004); however, the material prices make GaAs more expensive than traditional silicon. The differences in performance and price of these two panels are clear. However, before select any of these solar panels it is necessary to make economic and technical studies that take under consideration the weather conditions, the location and the power necessities.

The principal aim of this research was to outline the steps in the technical and economic evaluation of solar PV systems, comparing GaAs and Si solar panels under Texas weather conditions.

2. MATERIAL AND METHODS

2.1 Solar panels configuration

The experiment was performed using commercial Silicon (Si) and Gallium Arsenide (GaAs) panels donated by USDA-ARS, in Lubbock, Texas. The panels' configuration was developed to create identical testing situations for both panels. The panels were mounted on separate rolling platforms, both at the same distance from the ground and tilted at an angle of 35 degrees from the horizontal. To obtain the closest conditions between both solar panels, the surface area of the Si panel was modified to match the surface area of the GaAs panel. After the adjustments the final exposed area for each solar panel was 0.6975 m². A research-grade pyranometer (CMP 22, Kipp and Zonen) was used to measure the input solar irradiance (W/m²) that the panels were exposed to. The pyranometer was placed near the panels and tilted at the same 35 degree angle as the solar panels. During experimentation the panels were placed in the same location inside the Texas A&M campus. All data was recorded on an Omega 320 data logger (Omega Engineering Inc., Stamford, Connecticut). The logger was programmed to record and calculate the current, power output and efficiency of both panels simultaneously during experiment as well as measuring the solar irradiance.

2.2 Solar panels efficiency

To calculate the efficiency of the panels, it is necessary to know the irradiance, the power output and the surface area. The irradiance was measured by the pyranometer in W/m². To calculate the power output of the panels, a resistor was connected into the panel's circuit to induce a current. The resistor had a known constant resistance and the voltage was recorded across the resistor. According to Ohms law $V=I \times R$, the current was calculated from the measured voltage and known resistance. Once current was calculated, Watts law (Power = $I \times V$) calculation yields the power output of the panel with the given resistance. The power output from the panel is divided by the product of the irradiance and solar cell area to calculate the efficiency of the unit. Note that for the solar PV to operate under maximum power output at all times, the product of current (or amperage) and voltage must be at its maximum. Thus, the first sets of tests were made to determine the open circuit voltage (V_{oc}) of both the GaAs PV cell and the Si cell as solar radiation varies throughout the day. This will establish the maximum output voltage as a function of solar radiation. Unfortunately, during actual operation, current could not be measured if there is no load for the system hence, the set-up where a fixed or varying load is necessary. This may be done by varying the resistance across the load.

The short circuit current (I_{sc}) was established for each system and the maximum current drawn from each system is determined under varying solar radiation. Thus, with the short circuit current known as well as the open circuit voltage, the maximum power output may be estimated or measured since a solar cell may operate over wide ranges of voltages and current. Under ideal scenario, maximum power output could always be achieved, with proper combination of current and voltage, or in this case, by adjusting the load for the solar collector. In actual ideal applications, the solar PC cell is exposed under the sunlight and used to charge a battery using the combination of current and voltage that would generate the maximum power, while the load is simply attached to the battery during usage. This configuration will achieve optimum utilization of energy and power from the sun. Thus, it is not advisable to connect the load directly to the solar PV precisely because of the fact that if the load is fixed, it will not be able to achieve maximum power storage from the sun at varying irradiation.

The calculation of efficiencies for this study was based on the maximum combination of current and voltage to achieve maximum actual power from each PV unit as shown in Equation 1.

$$\eta = \frac{P_m}{A_c \times S} \times 100\% \quad (1)$$

Where, η = solar PV cell efficiency (%), P_m = maximum power point, Watts, A_c = area of solar collector (0.6975 m² in this study), S = incident solar radiation on the collector, W/m². The P_m is the maximum power output that could be generated at a given incident solar radiation. This value will vary according the open circuit voltage relationships as well as the current that could be drawn to provide the maximum power. Thus, at a given incident solar radiation, the output voltage maybe projected and the proper load may be adjusted to generate the maximum power. Electronically, this is simply done by varying the resistance or the resistive load.

2.3 Solar panels economical evaluation

To develop an economic comparison between the two solar panels, a simulation of the yearly performance of each solar panel was done. In this case, the environmental conditions used corresponded to College Station, Texas; Latitude (ϕ): 30.6°, Longitude: 96.3°, Solar Constant (G_{sc}): 1367 W/m², and Panels slope (β): 35°. The consumption assumed was 1000kw/month; it corresponds to a small cattle farm with 10 to 40 animals, these values were calculated using the energy consumption in a cattle farm reported by Granted Consultancy, 2012. The systems' efficiency was calculated using the experimental data and the life of systems supposed was 20 years. The economic assumptions used for the economical simulation are shown in Table 1.

Table1. Economic assumptions

Variable	Costs (Dollars)
Gallium Arsenide panels costs	\$3/Wp
Silicon panels costs	\$2/Wp
Gallium Arsenide system cost (Balance of system included)	\$7/Wp
Silicon system cost (Balance of system included)	\$6/Wp
Grid	\$0.12/kWh

To make the comparison between the two solar panels it is necessary to calculate the daily revenue (D_R)

$$D_R = P_{day} \times grid \quad (2)$$

Where Grid= Cost of the energy in dollars/kWh, P_{day} = power generated by day kWh. P_{day} is calculated using the next equation:

$$P_{day} = \frac{A_c \times S \times \eta \times N_h}{1000} \quad (3)$$

Where A_c =solar panel area (m²), S =incident solar radiation (W/ m²), η =solar panel efficiency, N_h = number of daylight hours. N_h was calculated using equation 4 and S was calculated using the equation 6:

$$N_h = \frac{2}{15} \cos^{-1}(-\tan \phi \tan \delta) \quad (4)$$

157

158 Where ϕ = Latitude, and δ = declination angle. The declination angle is calculated using the
159 equation 5

$$\delta = 23.45 \times \sin \left(360 \times \frac{284 + n_d}{365} \right) \quad (5)$$

161

162 In equation 5 n_d correspond to the day of the year which is simulated from 0 to 365. The
163 incident solar radiation was calculated using the next equation:
164

$$S = H_0 / N_h \quad (6)$$

166

167 Where H_0 = daily solar radiation number (MJ/m^2) and N_h = number of daylight hours (h). To
168 obtain the solar radiation units (W/m^2) is necessary to use conversion factors in the formula.
169 The daily solar radiation number is calculated using equation 7.
170

$$H_o = \frac{24 \times 3600 G_{sc}}{\pi} \left(1 + 0.033 \cos \frac{360 n_d}{365} \right) \times \left(\cos \phi \cos \delta \sin \omega_s + \frac{\pi \omega_s}{180} \sin \phi \sin \delta \right) \quad (7)$$

172

173 Where G_{sc} = Solar Constant ($1367 \text{ W}/\text{m}^2$), n_d = day of the year, ϕ = Latitude, δ = declination
174 angle, and ω_s = hour angle. The hour angle can be calculated by using equation 8.
175

$$\omega_s = \cos^{-1} \left(-\frac{\sin \phi \sin \delta}{\cos \phi \cos \delta} \right) \quad (8)$$

177

178 Where ϕ = Latitude and δ = declination angle. Demonstrations and other the equations used
179 above can be found in a solar textbook such as Duffie and Beckman (2013) or other similar
180 solar energy references (Duffie and Beckman 2013).
181

182

183

184 3. RESULTS AND DISCUSSION

185

186 3.1 Solar panels efficiency

187

188 The open circuit measurements were performed using the solar panels circuit without the
189 resistor. The GaAs solar cell open circuit voltage measurements are shown in Figure 1a.
190 The maximum open circuit voltage was found to be around 33.82 Volts for the maximum
191 solar radiation ($1,227 \text{ W}/\text{m}^2$) measured during the experiment. Likewise, the Si panel's open
192 circuit voltage relationship is shown in Figure 1b. In this type of solar cell, the maximum
193 voltage was found to be around 23.14 Volts for the highest solar radiation in the experiment
194 ($1,227 \text{ W}/\text{m}^2$). The open circuit voltage relationship for the Si solar cell was not quite distinct
195 and was assumed to be of second order with an R^2 of around 0.7167. For the GaAs unit, the
R squared was found to be 0.9779 for a fourth-order relationship.

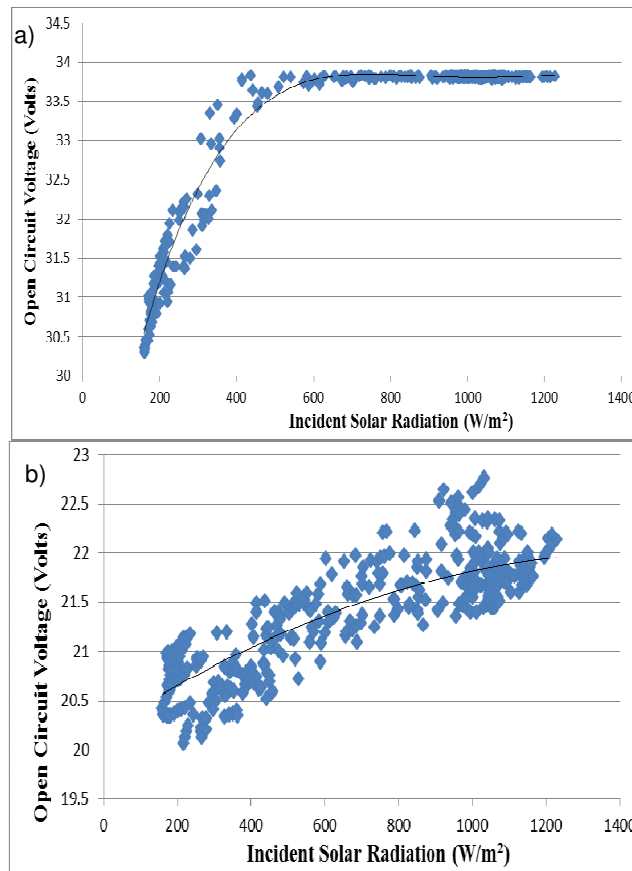


Figure 1. Relationship between open circuit voltage and solar radiation a) GaAs Solar Cell, b) Si Solar Cell.

The short circuit current (I_{sc}) measurements for the GaAs and Si solar cells are shown in Figures 2a and 2b. In this experiment, the GaAs' I_{sc} was found to be 2.0056 Amps, and the Si panel's I_{sc} was 2.44 Amps. These values will be the basis for the calculation of maximum power point (P_m).

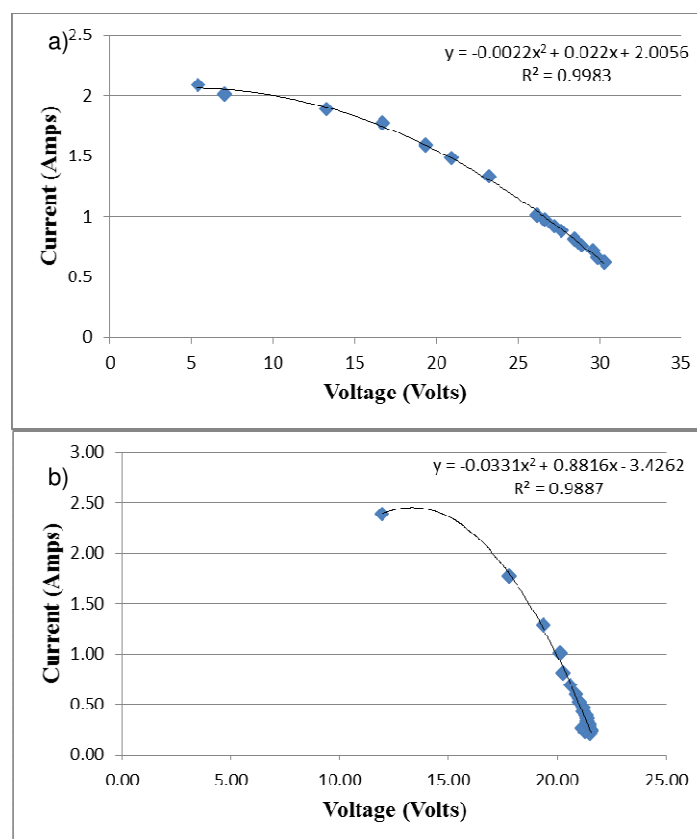


Figure 2. Relationship between voltage and current, a) GaAs Solar Cell, b) Si Solar Cell.

Figure 3 shows the calculated conversion efficiencies for the GaAs and Si solar cells on a typical sunny day in College Station, Texas. The average daily efficiency for the GaAs unit was found to be 18.36% compared with 14.02% for the Si solar cells or a difference of over 4%. Equation 1 was used for the calculation of maximum power for both systems. The plot of efficiencies as a function of solar radiation variations is shown in Figure 4. **Note the decrease in the conversion efficiency as solar radiation is increased. This is a consequence of load effects and other factors associated with a solar PV performance.** Data in Figure 4 will be utilized to make a year-long inventory of the solar PV output using daily solar radiation data for the experiment location. The trend line for each graph is also shown with very high degree of correlation. Thus, if solar radiation is known each day for a given location, the yearly output of the solar PV cell may be easily estimated. Further, if the initial capital costs as well as operational costs are also known, the overall economic benefit of the unit may be evaluated appropriately. This is done by simply multiplying the solar radiation received per unit area on a given day throughout the year with the solar collector area. If the unit is metered-in at the local utilities and the utilities cost is known (\$/kWh), then the yearly revenue may be estimated. These analyses will be presented in the next section.

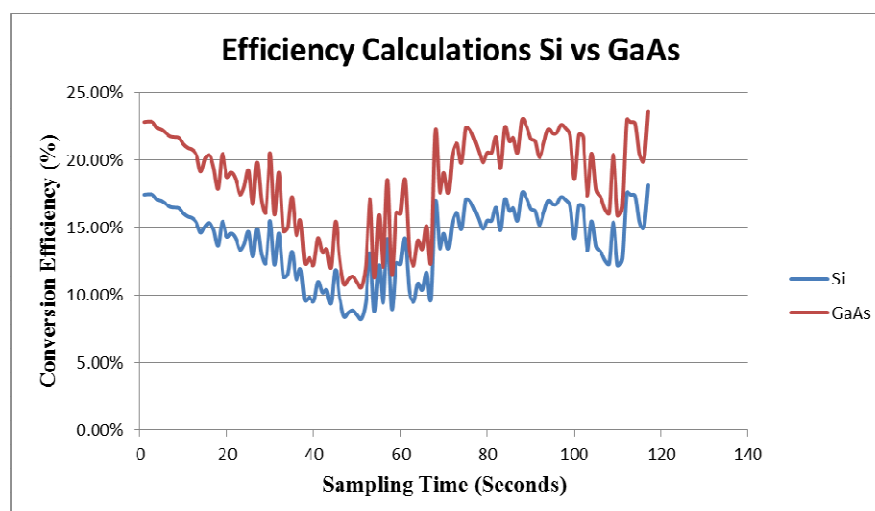


Figure 3. Conversion Efficiencies for GaAs and Si Solar Cells.

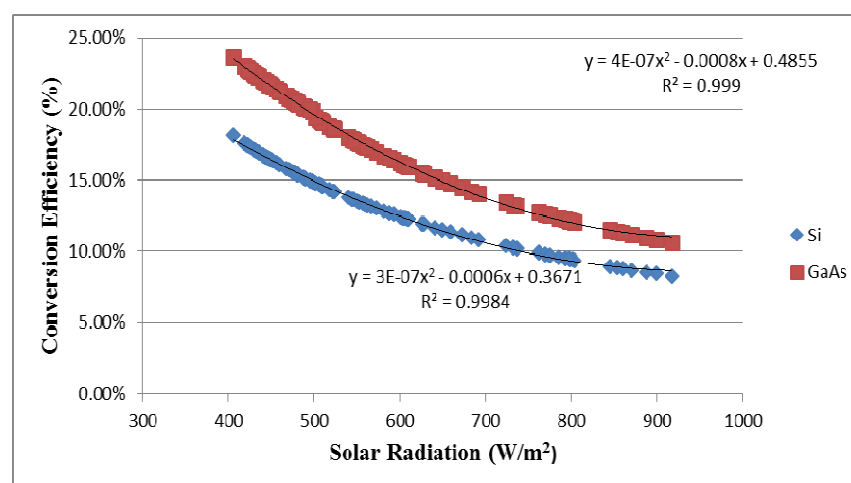


Figure 4. Conversion Efficiencies for GaAs and Si Solar Cells as a function of solar radiation.

Economic Evaluation of PV Systems Studied

To compare the economic return of the solar PV systems, it was necessary to simulate the solar panels' yearly performance from actual solar radiation data available on a given location. Numerous cities worldwide have reported their solar energy potential and perhaps the basic data is the one similar to that shown in Figure 5. This graphs shows the average solar energy received each month in units of MJ/m². This type of data was used to make a yearlong initial estimate of the performance of a solar PV cell when used in this location. The actual values of solar radiation received are shown in Table 1. Included in Table 1 are the theoretical solar energy received each month (H_0) and the clearness index (K_t) in College Station, Texas. The clearness index is a factor that was used to calculate the actual solar radiation received compared with the theoretical maximum possible solar radiation received, if the sky were very clear and absolutely free of obstructions (i.e., actual solar radiation

received = $H_o \times K_i$). The solar panel units were facing directly south. The theoretical number of hours of sunshine is also needed in the calculations to convert a power output (kW) into energy (kWh).

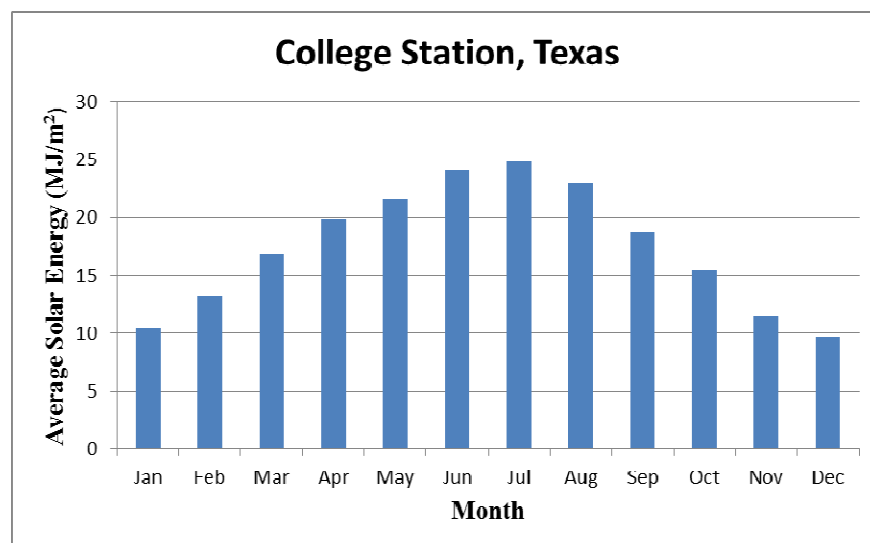


Figure 5. Average Solar Radiation Received in College Station, Texas for a Year.

Further assumptions include the use of about 15 units of the solar panel with an initial capital cost of \$8,400 (Kyocera 2150 W system, multi crystalline Si) or an assumed 21 m² of a solar panel area. The unit will be net-metered in a utility that has a utility cost of approximately \$0.12/kWh (or 12 cents per kWh). This will be compared with a similar GaAs solar PV cell with an assumed initial capital cost of \$10,000. The bases for these costs are the following: \$3/Wp for GaAs unit versus \$2.04/Wp for the crystalline Si unit (Giannouli and Yianoulis 2012). The total installed cost was assumed to be around triple the value for the crystalline Si or an assumed \$4/Wp additional balance-of-system (BOS) cost for both systems. BOS includes all additional cost to have the unit in full operation such as the batteries, converters, controllers, wiring and other switches. Thus, the overall cost used for the analysis was \$7/Wp for GaAs and \$6/Wp for the Si unit. On the average a household in the US consumes around 1,000 kWh/month of power and an assumption was made to have this requirement being supplied by the solar panels. This translates to a solar module with a rating of around 1,400 Wp which for the GaAs unit will have an initial installed cost of around \$9,800 (assumed \$10,000 above) and \$8,400 for the crystalline Si.

The procedure for calculation is a simulation over a year using the product of K_i and H_o and the expected power output for a given day. This daily output is then added to provide a yearly estimate of the revenue over an assumed 20 year life of the units with no operating and maintenance cost. The revenue is simply spread out over the capital cost to determine the simple payback period (PBP). In this study, the yearly revenue for the Si system is around \$1,120 versus \$1,470 for the GaAs unit. One should do a much more complicated economic analysis depending upon the state and other fixed and variable cost data including use of tax rebate for the purpose. The results of calculations in this study showed that it would take about 7.5 years for the Si PV panels to recover the initial investment cost as against the net-metered revenue while 6.8 years for the GaAs unit, without any subsidy. Thus, there is a slight advantage for the GaAs PV units due to its higher conversion efficiency even though the initial capital cost is slightly higher.

281

282 **Table 2. Solar Radiation Data in College Station, Texas**

283

Month	H(MJ/m ²)	Ho (MJ/m ²)	Kt	Monthly revenue	
				Si	GaAs
January	10.4	20.91	0.498	63.68	83.39
February	13.3	25.86	0.519	72.60	95.08
March	16.9	31.56	0.536	95.86	125.53
April	19.8	36.74	0.537	108.44	142.01
May	21.6	39.97	0.539	121.90	159.63
June	24.1	41.18	0.585	121.23	158.76
July	24.8	40.56	0.613	122.97	161.03
August	23	38.10	0.609	114.56	150.02
September	18.7	33.77	0.566	96.77	126.73
October	15.5	28.07	0.573	81.82	107.15
November	11.5	22.53	0.523	64.05	83.87
December	9.7	19.67	0.497	59.29	77.65
Yearly Mean	17.44	31.58	0.550	93.60	122.57

284

285 The economics analysis will change if additional data is considered. What is shown in this
 286 study is a procedure for comparing a solar PV units based on their actual field performance
 287 and the step-by-step procedure in comparing actual commercial PV units. This paper in no
 288 way recommends one type of solar PV system to another since the prices and individual
 289 states tax incentives will vary. For example, if there is a 50% subsidy on the total initial
 290 capital cost, the PBP will simply be reduced by half, making the system very attractive to
 291 farmers and ranchers, especially if the PBP can be reduced to less than 5 years (i.e. 3.4
 292 years for the GaAs and 3.75 years for the Si system). The operating and maintenance costs
 293 for the solar PV system are very minimal and will not provide significant changes into the
 294 economic analysis over the life of the system. Perhaps, the most important maintenance
 295 cost for this system is the replacement of batteries. Deep cycle batteries are quite reliable
 296 and may not be replaced for at least 5 years. They are just quite expensive compared with
 297 automotive batteries. Thus, one would expect the purchase of new deep cycle batteries
 298 around every 5 years.

299

300 If the GaAs unit is to be operated on a concentrated mode (i.e. highly intense sunlight), the
 301 advantage may be more significant than with the multi-crystalline Si cells. The rebates and
 302 tax incentives will change the overall economics if they are included in the calculations. If for
 303 example the prices of the units are cut in half (say due to capital cost subsidy), then the
 304 payback period will be cut in half as well. Clearly, solar energy technologies are still quite
 305 expensive considering the high initial capital cost as well as the relatively low actual
 306 conversion efficiencies.

307

308 **4. CONCLUSION**

309

310 The technical and economical outline proposed in this paper was useful to decide between
 311 GaAs and Si panels using basic economic assumptions. In that way, it was calculated the
 312 conversion efficiency of the GaAs (18.36%) and Si (14.02%) panels under East Central
 313 Texas conditions. The economic study exhibited that Si panels has a recovery time (7.5
 314 years) of the initial capital larger than the GaAs solar panels (6.8years). This paper did not
 315 recommend a specific solar panel over the other in every situation. In other locations will be
 316 necessary to correct the prices and individual states tax incentives. Future economic

317 calculations should take in consideration government subsidies, rebates and tax credits to
318 make the economical and technical analyses a more accurate tool to select solar panels.
319

320

321 **COMPETING INTERESTS**

322

323 Authors have declared that no competing interests exist.
324

325

326

326 **REFERENCES**

327

328 [1] The State of Texas, Texas Renewable Energy Industry Report, **2012**.
329

330 [2] House Research Organization, Solar Energy in Texas, *Focus Report* **2010**, 4/4/2013.
331

332 [3] USDA, Texas Annual Statistics Bulletin, **2009**, 2013 (3/24).
333

334 [4] Granted Consultancy, Energy in Farming, *Energy in Farming* **2012**, 2013 (3/27),
335 04/1/2013.
336

337 [5] T. M. Razykov, C. S. Ferekides, D. Morel, E. Stefanakos, H. S. Ullal, H. M. Upadhyaya,
338 Solar Photovoltaic Electricity: Current Status and Future Prospects, *Solar Energy* **2011**, 85
339 (8), 1580-1608
340 DOI:<http://dx.doi.org/10.1016/j.solener.2010.12.002>.
341

342 [6] V. M. Andreev, V. A. Grilikhes, V. P. Khvostikov, O. A. Khvostikova, V. D. Rumyantsev,
343 N. A. Sadchikov, M. Z. Shvarts, Concentrator PV Modules and Solar Cells for TPV Systems,
344 *Solar Energy Mater. Solar Cells* **2004**, 84 (1–4), 3-17
345 DOI:10.1016/j.solmat.2004.02.037.
346

347 [7] J. Duffie, W. Beckman, *Solar Engineering of Thermal Processes*, 4th ed., John Wiley
348 & Sons, Inc., United states **2013**, 956.
349

350 [8] M. Giannouli, P. Yianoulis, Study on the Incorporation of Photovoltaic Systems as an
351 Auxiliary Power Source for Hybrid and Electric Vehicles, *Solar Energy* **2012**, 86 (1), 441-451
352 DOI:<http://dx.doi.org/10.1016/j.solener.2011.10.019>.