

Original Research Article

Evaluation of a Few Evapotranspiration Models using Lysimetric Measurements in a Semi Arid Climate Region

ABSTRACT

The determination of reference evaporation method in a region with different simple or complex equations requires a wide range of meteorological data. It is difficult task particularly in regions with lacking data collection facilities. One of the common methods for this purpose is the use of lysimeters. In the present study, daily lysimetric data for two years (2012 to 2013) from April to July in each year were used to evaluate nine different grass evapotranspiration models including FAO-56 Penman-Monteith, Penman-Kimberly 1996, FAO-Penman equation, Blaney-Criddle, FAO-24 Radiation, Makkink, Turc, Priestley-Taylor, and Hargreaves in Kermanshah western part of Iran with semi-arid climate. Finally, the values of RMSE indicate that, the FAO - Penman-Monteith, Makkink and Hargreaves and Samani were found to be the most appropriate models for the studied region. Penman-Kimberly and FAO-Penman methods had the worst results among the studied models. FAO - Penman-Monteith, Makkink and Hargreaves-Samani methods recommended for reference evaporation estimation, irrigation planning and scheduling, dams reservoirs design and different surface or pressurized irrigation projects water requirement application under different crop patterns in Kermanshah region, while weather, radiation and temperature data have been available. Based on RMSE values, the FAO -Penman-Monteith, Makkink and Hargreaves & Samani methods estimated the lysimeter reference evaporation values most closely and Penman-Kimberly and FAO-Penman methods had the worst results in the region.

Keywords: evapotranspiration, ETo equations, Lysimeter, Semi-arid climate.

1. INTRODUCTION

Evapotranspiration (ET), a term to denote evaporation and transpiration together, is the most important component of environmental systems and accomplishes the energy (heat) and mass (water vapor) transfers between atmosphere and land surface (primarily including soils and vegetations) [61].

Reference evaporation (ETo) is defined in as the rate of evapotranspiration from hypothetical crop

Comment [ET1]: first reference cited in the text SHOULD BE NUMBER [1] !!!

35 with as assumed crop height (12cm), an albedo of 0.23, and a fixed canopy resistance (70 Sm^{-1})
36 which would closely resemble evapotranspiration from an extensive surface of the green grass cover
37 of uniform height actively growing, completely shading the ground with no shortage of water [2]. The
38 plant growth and productivity are directly related to the availability of water [293]. ETo can be
39 measured directly by lysimeter. However, it is generally estimated by theoretical or empirical
40 equations, or derived simply by multiplying the standard pan evaporation data by a pan coefficient
41 [424]. Direct measurement of ETo can be difficult and expensive both economically and in time
42 investments while basic measurements of the atmosphere are easy to collect and available at
43 numerous locations. For this reason and to overcome inaccurate ETo estimation, numerous methods
44 have been developed for various types of climatic conditions over the years.
45 FAO-56 Penman–Monteith (PM) equation is the most commonly used and accurate model to
46 determine the ETo by the United Nations Food and Agriculture Organization (FAO) and by the World
47 Meteorological Organization (WMO) [45]. However, ranking and selecting of the best method to
48 estimate ETo to local conditions is required for water resources and irrigation management and
49 scheduling purposes.
50 Five ETo estimation methods evaluated by comparing the estimated with results obtained from the
51 PM 56 equation under humid conditions [326]. They showed that Turc's method gave the best ETo
52 estimates and ranking first, and the other equations ranking in a decreasing order were as Priestley–
53 Taylor, Jensen–Haise, Thornthwaite, and Hargreaves. The ETo measured in lysimeter in Campos dos
54 Goytacazes compared with ETo estimated by PM method [247]. The researchers found that PM
55 method satisfactorily estimated ETo values.
56 Four simpler models based on monthly performance for various climates in Iran evaluated [348]. They
57 reported that the Makkink and Priestley–Taylor models estimated ETo values less accurately than
58 Turc and Hargreaves and Samani models for all climates. The performance of 20 different methods
59 against the lysimeter measuring ETo analyzed for 11 stations located under different climatic
60 conditions around the world [189]. The Penman–Monteith ranked the best method for all climatic
61 condition; however, ranking of the other methods varied depending on their adoption to local
62 calibrations and conditions. The performance of Turk, Priestley–Taylor compared to PM 56 methods
63 to estimate potential evapotranspiration in humid climates in Florida [4410]. They concluded that the
64 Priestley–Taylor performance appeared to be superior to the other two methods for a variety of land
65 covers in Florida.

Comment [ET2]: ok.
(This is the second reference cited in the text)

Comment [ET3]: Third reference cited in the text
SHOULD BE NUMBER [3] !!!

Comment [ET4]: Fourth reference cited in the text
SHOULD BE NUMBER [4] !!!

Comment [ET5]: Fifth reference cited in the text
SHOULD BE NUMBER [5] !!!

Comment [ET6]: Sixth reference cited in the text
SHOULD BE NUMBER [6] !!!

Comment [ET7]: seventh reference cited in the
text SHOULD BE NUMBER [7] !!!

Comment [ET8]: eighth reference cited in the
text SHOULD BE NUMBER [8] !!!
... and so on [9], [10], ... etc.

66 Nine different equation for ETo estimation evaluated by using lysimeter in a semi-arid region in the
67 south of Iran [2811]. They concluded that the FAO-Radiation was the most suitable method to
68 estimate ETo for irrigation planning and scheduling in regions where radiation and temperature data
69 are available.

70 The performance of nine ETo methods with FAO56-PM output data evaluated and compared [2712].
71 The best results after calibration were produced by Blaney-Criddle method while Thornthwaite
72 method had the worst results. Moreover, the determination of evaporation in a region with different
73 simple or complex equations required a wide range of meteorological data. This again proved the
74 difficulty of choosing the most appropriate method.

75 Moreover, the most common and widely used methods for reference evapotranspiration estimation by
76 local agricultural and water resources organizations and consulting engineers in the region based on
77 climatic availability data was the base reason for different selected method and comparison with
78 lysimetric reading data. Therefore, Daily-daily lysimetric data for two years from April to July were
79 used in the present study to evaluate simple or complex nine ETo models including FAO-56 Penman-
80 Monteith (PM), Penman-Kimberly 1996 (Pk), FAO-Penman equation (PM), Blaney-Criddle (BC),
81 FAO-24 Radiation (FR), Makkink (MA), Turc-radiation (TR), Priestley-Taylor (PT), and Hargreaves
82 and Samani (HG) in a region with semi-arid climate. Different methods were compared with
83 experimentally determined values and drainage lysimeters data to find the best and the worst
84 methods in the region for practical irrigation planning purposes.

85

86 2. MATERIAL AND METHODS

87

88 2.1. EXPERIMENTAL SITE AND WEATHER STATION, SOIL, AND IRRIGATION WATER DETAILS

89 The Lysimetric-lysimetric experiments were carried out in two years from 2012 to 2013 from April to
90 July at the Irrigation and Water Resources Engineering Research Lysimetric Station No. 3 located at
91 47°9' E and 34°21' N, with an elevation of 1319 m (asl), as part of the Campus of Agriculture and
92 Natural Resources of Razi University in Kermanshah, Iran. The region under study has a semi-arid
93 climate. The daily meteorological data were obtained from the regional meteorological station located
94 100 m off the lysimetric station. Table (1) shows the average monthly meteorological data during
95 both years of the study. The soil texture in the lysimeters was silty clay composed of different clay,
96 silt, and sand percentages. Tables (2) and (3) show the physical and chemical properties of the soil
97 and the chemical properties of the irrigation water used in this study. The pressure plate and sampling

98 methods were used to determine $\theta(fc)$, $\theta(pwp)$ and bulk density in different lysimeters soil depths,
 99 respectively.

100

101

102

Table 1. Meteorological Data for growing period 2012-2013

Year	Month	Mean temperature (C)	Mean relative humidity (%)	Mean wind speed (m/s)	Mean monthly sunshine (h)	Total precipitation (mm)
2012	April	11.8	53.9	7.1	6.9	45.7
	May	18.4	36.5	7.7	8.3	0.0
	June	24.8	21.4	7.9	9.7	0.0
	July	28.1	19.6	7.6	10.2	0.0
2013	April	13.4	42.5	7.3	7.3	10.7
	May	15.1	54.2	8.4	5.3	63.3
	June	23.3	27.4	7.4	9.2	0.0
	July	29.1	14.7	7.4	11.6	0.0

103

104

105

Table 2. Physical and Chemical Properties of Soil

Soil Texture	Sand (%)	Silt (%)	Clay (%)	EC (dS/m)	$\theta(Fc)$ (%)	$\theta(PWP)$ (%)	pH	Bulk density (g/cm ³)	Soil depth (cm)
Silty Clay				0.61			7.63	1.3	0-30
	54	42.3	3.7	0.61	27.6	17.2	7.61		30-60
				0.59			7.73		60-90
				0.58			7.73		90-120

106

107

108

109

110

Table 3. Physical and Chemical Properties of Irrigation Water

SO ₂ ⁻ (Meq/L)	Cl ⁻ (Meq/L)	HCO ₃ ⁻ (Meq/L)	CO ₃ ²⁻ (Meq/L)	TDS (Meq/L)	pH	EC (dS/m)	Anions (Meq/L)	Mg ²⁺ (Meq/L)	Na ⁺ (Meq/L)	Ca ²⁺ (Meq/L)	Cations (Meq/L)
1.25	1.90	6.15	0	390	7.2	0.61	9.30	3.1	1.15	5.05	9.30

111

112

113 **2.2. DETAIL OF DRIANABLE LYSIMETERS**

114

115 In this study three drainable lysimeter with depth of 1.40 m and internal diameter of 1.20 m were
 116 used. The lysimeters were constructed with 3-mm-thick mild steel. To prevent rusting phenomenon
 117 both inside and outside parts of lysimeters were painted with epoxy material. By using tarry material
 118 all parts of lysimeters were also isolated carefully. For extra drainable water collection, the bottom of
 119 each lysimeter was inclined towards the center. In the bottom of each lysimeter an stainless steel
 120 screen was used with mesh size of 0.2 mm. In the above of stainless steel screen, 10-cm layer of
 121 gravel and a 10-cm layer of sand were used. In each lysimeter to measure of extra drained water
 122 collection by a graded container a steel pipe with diameter of 2.50 cm fixed with a control gate valve
 123 was used. In all lysimeters a silty clay soil consisting of 54, 42.3, and 3.7% clay, silt, and sand was
 124 used. All lysimeters were filled with air-dried soil and compacted manually to reach a bulk density of
 125 1.30 gcm⁻³ according to [2513] method. Soil moisture characteristic curves was determined by using
 126 [4914] method. Lawn grass with 12 cm height inside and also in an area of (50x50m) was planted
 127 around the lysimeters respectively.

128

129 **2.3. SOIL MOISTURE MEASUREMENT**

130

131 A TDR system (Trime-Fm with P2G probes) was used to measure soil moisture. TDR probes were
 132 0.60 cm in diameter and 16 cm long and were installed in all lysimeters at 6 different depths of 20, 40,
 133 60, 80, 100, and 120 cm. The irrigation was carried out in all lysimeters after 20% depletion of
 134 available soil moisture in order to avoid any water stress during grass growing period.

135

136 **2.4. LYSIMETER MEASUREMENT**

137

138 Three lysimeters were used to estimate grass evapotranspiration; also, potential evapotranspiration
 139 (ET_o) was calculated using Equation (1) as follows:

$$140 \quad ET_o = P + I - D - R + \Delta s \quad (1)$$

141 Where, ETo = reference evapotranspiration (mm); P = precipitation (mm); I = irrigation (mm); D =
 142 amount of drained water (mm); R = runoff (mm); and ΔS = changes in soil water storage during the
 143 period for which ETo was computed (mm). The precipitation was measured with a rain gauge *in situ*.
 144 The irrigation (I), D , and R for the lysimeters were measured with a precession graded container and
 145 rain gauge. The changes in soil moisture were obtained from soil moisture readings at different
 146 depths. Daily meteorological data including minimum and maximum temperatures, sunshine hours,
 147 wind speed, and average relative humidity were also collected from a regional meteorological station.
 148 Different equations for estimation of ETo were as follows:

149
 150 **2.5. METHODS OF COMPUTING (ETo)**

151
 152 Different nine methods were chosen to estimate ETo for the study area as follows:

153
 154 **2.5.1. FAO-PENMAN METHOD, Doorenboss [3,9,10,15, 16, 17]**

155
 156

$$ETo = c \left[\left(\frac{\Delta}{\Delta + \gamma} \right) (R_n) + \left(\frac{\gamma}{\Delta + \gamma} \right) (2.7) (W_f) \left(e_z^{\circ} - \frac{156}{157z} e_z \right) \right] \quad (2)$$

157
 158 Where, ETo , ($e_z^{\circ} - e_z$), γ , Δ , R_n , W_f and c are reference evapotranspiration (mm day^{-1}), vapor
 159 pressure deficit at height z (kPa), psychometric constant ($\text{kPa } ^{\circ}\text{C}^{-1}$), slope vapor pressure curve (kPa
 160 $^{\circ}\text{C}^{-1}$), net radiation (MJ m^{-2} per day), the wind function and adjustment factor which is equal to 1
 161 respectively.

162
 163
 164 **2.5.2. PENMAN-KIMBERLY METHOD , Wright [34,18]**

165

$$ETo = \frac{1}{\lambda} \left[\left(\frac{\Delta}{\Delta + \gamma} \right) (R_n - G) + \left(\frac{\gamma}{\Delta + \gamma} \right) (6.43) (W_f) \left(e_z^{\circ} - \frac{166}{167z} e_z \right) \right] \quad (3)$$

166 where, G and λ are soil heat flux density ($\text{MJ m}^{-2} \text{day}^{-1}$) and latent heat of vaporization in (MJ kg^{-1}).

167
 168
 169
 170 **2.5.3. FAO-PENMAN-MONTEITH METHOD , Allen [1,2,5]**

171

$$ETo = \frac{0.408 \Delta (R_n - G) + \gamma \frac{900}{T + 273} u_2 \frac{171}{172} (e_s - e_a)}{\Delta + \gamma (1 + 0.34 u_2)} \quad (4)$$

172
 173

174 where, u_2 and $(e_s - e_a)$ are wind speed at 2 m height ($m s^{-1}$) and saturation vapor pressure deficit
 175 (kPa).

176

177 **2.5.4. TURC-RADIATION METHOD ,Turc [3319]**

178

$$ET_o = a_T (0.013) \frac{T_{mean}}{T_{mean} + 15} \left(\frac{23.8856 R_s + 50}{\lambda - 179} \right) \quad (5)$$

180

181 where, T_{mean} and R_s are mean daily air temperature ($^{\circ}C$), and solar radiation ($MJ m^{-2} d^{-1}$), a_T is
 182 equal 1.0 for $RH_{mean} \geq 50\%$ and it is equal $1 + (50 - RH_{mean})/70$ for $RH_{mean} < 50\%$.

183

184 **2.5.5. HARGREAVES AND SAMANI METHOD, Hargreaves [13, 14, 20, 21]**

185

$$ET_o = \frac{1}{\lambda} (0.0023) R_A TD^{1/2} (T + 17.8) \quad (6)$$

187

188 where, R_A , TD and T are extra-terrestrial solar radiation received on earth's surface ($MJ m^{-2} d^{-1}$),
 189 difference of mean maximum and mean minimum air temperatures ($^{\circ}C$) and mean daily air
 190 temperature at 2 m height ($^{\circ}C$) respectively.

191

192 **2.5.6. MAKKINK METHOD [2222]**

193

$$ET_o = 0.61 \frac{\Delta}{\Delta + \gamma} \frac{R_s}{2.45} - 0.12 \quad (7)$$

195

196 **2.5.7. FAO-RADIATION METHOD, Doorenboss [9, 10, 16, 17]**

197

$$ET_o = b \left[\frac{\Delta}{\Delta + \gamma} \frac{R_s}{\lambda} \right]^{1.97} - 0.3 \quad (8)$$

199

$$b = 1.066 - 0.13 \times 10^{-2} RH + 0.045 U_d - 0.2 \times 10^{-2} RH U_d - 0.315 \times 10^{-4} RH^2 - 0.11 \times 10^{-2} U_d^2 \quad (9)$$

200

201 where, RH is mean relative humidity (%).

202

203 **2.5.8. PRIESTLEY AND TAYLOR METHOD [2623]**

204

$$ET_o = \frac{1}{\lambda} \alpha \frac{\Delta}{\Delta + \gamma} (R_n - G) \quad (10)$$

205

206 where, α is a constant ($\alpha = 1.26$).

207

208 **2.5.9. BLANEY-CRIDDLE METHOD , Blaney [4, 524, 25], Doorenboss [9, 1016, 17]**

209

$$ET_o = a + bf$$

210

(11)

$$a = 0.0043RH_{\min} - \frac{n}{N} \times 141$$

212

$$b = 0.82 - 0.41 \times 10^{-2} RH_{\min} + 1.07 \times \frac{n}{N} + 0.066U_d - 0.6 \times 10^{-2} RH_{\min} \times \frac{n}{N} - 0.60 \times 10^{-3} RH_{\min} \times U_d$$

213

$$f = p(0.46T + 8.13)$$

214

215 where, RH_{\min} , n , N , p and U_d are minimum relative humidity (%), actual daily sunshine hours (h),

216 maximum possible daily sunshine hours (h), monthly percentage of daytime hours and daytime wind

217 speed (ms^{-1}) respectively.

218

219 2.6. DATA ANALYSES

220

221 The method suggested by [16, 17, 26, 27] were used for statistical analyses. The following equations

222 were used to compute the regression coefficients (r), root mean square error (RMSE), mean bias

223 error (MBE) and t-statistic test (t).

224

$$r = \frac{\sum_{i=1}^n (x - \bar{x})(y - \bar{y})}{\sqrt{\sum_{i=1}^n (x - \bar{x})^2 \sum_{i=1}^n (y - \bar{y})^2}} \quad -1 \leq r \leq 1 \quad (12)$$

226

$$MBE = \frac{\sum_{i=1}^n d_i}{n} \quad (13)$$

$$RMSE = \sqrt{\frac{\sum_{i=1}^n d_i^2}{n}} \quad (14)$$

$$t = \sqrt{\frac{(n-1) MBE^2}{RMSE^2 - MBE^2}} \quad (15)$$

232 where, x = the measurement value, \bar{x} = the mean measurement value, y = the predicted value, \bar{y} =

233 the mean predict value, d_i = difference between i^{th} predicted and i^{th} measured values, n = number of

234 data pairs i .

235 The regression equations computed from below formula:

236 $Y = mX + C$ (16)

237 where, Y represents the daily ETo measured; X is the daily ETo estimated from each of the other nine
238 methods; and m (slope) and C (intercept) are the regression constants.

239

240 3. RESULTS AND DISCUSSION

241

242 The daily evapotranspiration was computed based on water-balance data collected from lysimeters
243 using Equation (1) the computed ETo values from the lysimeter data for grass which was the
244 reference crop, from the months of April to July and were compared to the ETo values computed by
245 nine different methods. The average ETo values of lysimeter were obtained as 73,122,173 and 222
246 mm per month for April, May, June and July during 2012 and 2013, respectively. The values of
247 monthly measured ETo, the total values of ETo for lysimeter data and the predicted values from each
248 of the nine methods are presented in (Table 4). As shown in (Figure 1), the ETo increased from April
249 to July for both lysimeters and other chosen methods.

250 The cross correlation (R^2), slope, intercept and RMSE, MBE and t-test statistical methods were used
251 to compare the lysimeter ETo values with the ETo values by nine other methods. According to the
252 [1727], the performance of each method in the present study was based on t values. Lower t-values
253 showed a better performance of the method indicating that the differences between the measure and
254 the estimated values were lower. Also, the negative sign of the MBE indicates that the computed ETo
255 values were lower than ETo values measured by the lysimeter while positive MBE shows
256 overestimation of the lysimeter ETo values; the absolute value is also an indicator of method
257 performance. The slope near to unity indicates a parallelism of the measured and the calculated ETo
258 curves, while the lower intercept of the regression equation indicates proportionality between the two
259 methods. For statistical analysis, it was assumed that the best methods were those with the lowest
260 RMSE. The results of these comparisons for the above parameters are shown in (Table 5). The
261 methods in (Table 5) are ranked according to RMSE. The estimated ETo values by the PF, PK, PM,
262 TR, HG, MA, FR, PT and BC methods were evaluated with lysimeter ETo values having RMSE
263 values as 12.96, 8.74, 1.34, 2.67, 2.03, 1.48, 3.55, 2.34, 2.58 mm/day, respectively. Based on RMSE
264 and MBE values presented in (Table 5) and also as shown in Figure 2, the PM, MA and HG methods
265 estimated the lysimeter ETo values most closely and PK and PF methods did not show any close
266 agreement with the lysimeter values and had the worst results. Other methods (including PT, BC, TR,
267 and FR) showed reasonable agreement with the lysimeter values.

268 A comparison of the results show that the PK, PF, HG and FR methods overestimated while PM, TR
 269 and MA equation underestimated potential evapotranspiration compared to lysimetric estimation
 270 method.

271

272 **Table 4. Lysimetric and different estimating potential evapotranspiration methods**

Methods	ETo (mm)				
	Month				Total
	April	May	June	July	
Lysimetric measurement	73.0	122.1	173.4	222.7	591.2
FAO-Penman (PF)	365.8	469.3	583.4	669.1	2087.6
Penman-Kimberly(PK)	469.8	269.9	293.7	345.1	1378.6
FAO - Penman-Monteith(PM)	57.5	90.3	154.6	213.4	515.8
Turc-Radiation (TR)	40.0	53.2	89.6	115.7	298.5
Hargreaves & Samani (HG)	123.1	170.4	233.9	277.4	804.9
Makkink (MA)	87.1	107.1	143.6	170.4	508.2
FAO-Radiation (FR)	153.8	192.9	281.3	338.2	933.3
Priestley and Taylor (PT)	141.2	173.2	231.8	275.2	821.3
Blaney-Criddle (BC)	112.2	156.2	251.2	316.6	836.2

273

274

275

276

277

278

279

Table 5. The comparing of different methods with Lysimetric measurement in daily scale

Methods	Lysimeter measurement							Ranking
	Performance Indicator							
	Slope of the regression line	Intercept of the regression line	R ²	RMSE (mm)	MBE	t	R/t	
Lysimetric measurement	1	0	1	-	-	-	-	-
FAO - Penman-Monteith(PM)	1.045	-0.933	0.841	1.34	-0.66	6.27	0.14	1
Makkink (MA)	0.534	1.531	0.701	1.48	-0.74	6.42	0.12	2
Hargreaves & Samani (HG)	0.985	1.726	0.843	2.03	1.77	19.87	0.04	3
Priestley and Taylor (PT)	0.86	2.489	0.710	2.34	1.79	13.16	0.06	4
Blaney-Criddle (BC)	1.361	0.130	0.853	2.58	1.96	13.01	0.07	5
Turc-Radiation (TR)	0.504	-0.045	0.836	2.67	-2.42	23.85	0.04	6
FAO-Radiation (FR)	1.206	1.968	0.757	3.55	2.98	17.24	0.05	7
Penman-Kimberly(PK)	-0.607	14.27	0.080	8.74	6.57	12.67	-0.03	8
FAO-Penman (PF)	1.846	7.997	0.473	12.96	11.77	24.06	0.03	9

281

282 R = regression coefficients

283 RMSE= root mean square error

284 MBE= mean bias error

285 t = t-statistic test

286

287

288

289

290
291
292
293
294
295
296
297
298
299
300



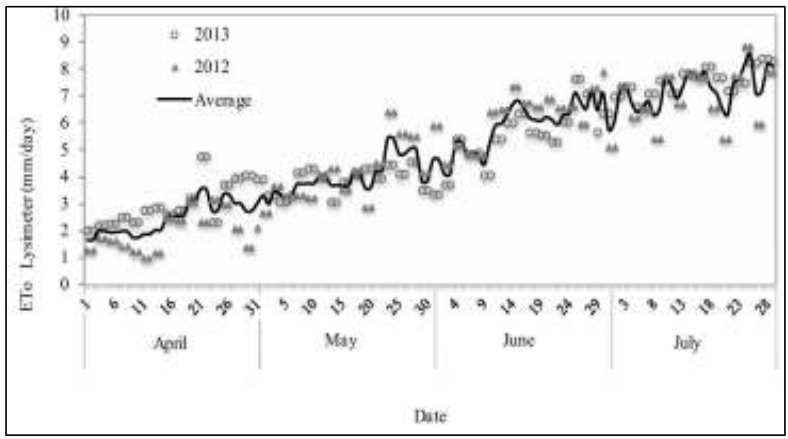


Figure 1. Daily ET0 measurement values

301
302
303
304

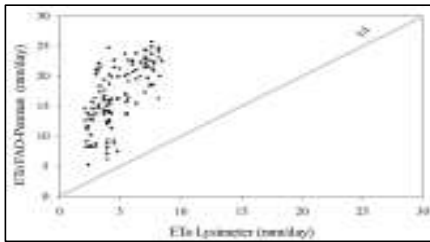


(a)

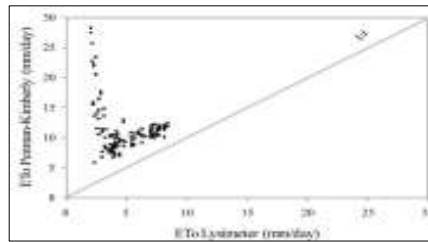


(b)

305
306
307
308

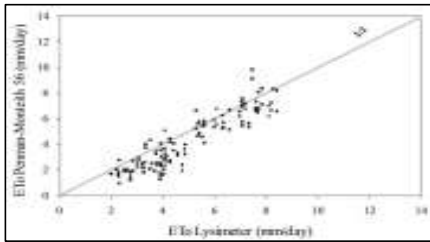


(c)

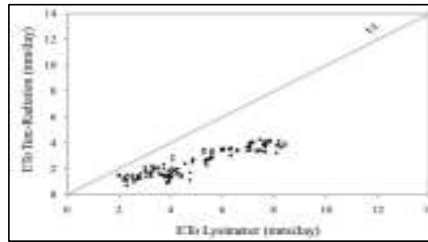


(d)

309
310
311
312
313

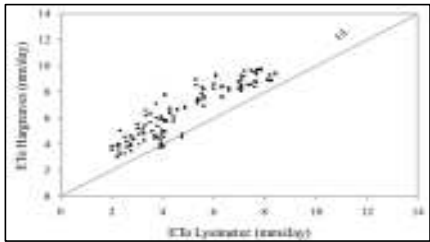


(e)

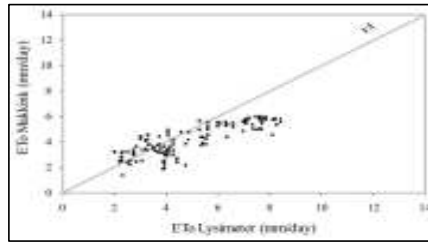


(f)

314
315
316
317
318

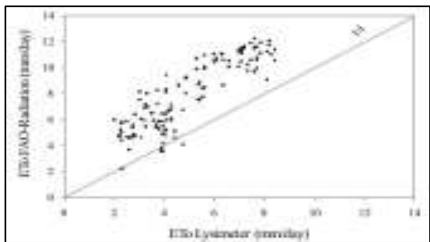


(g)

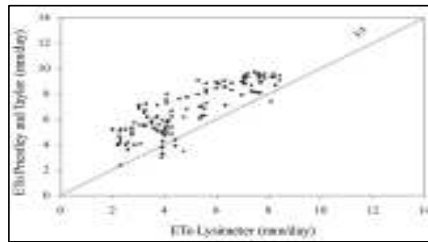

(h)

319
320
321
322
323

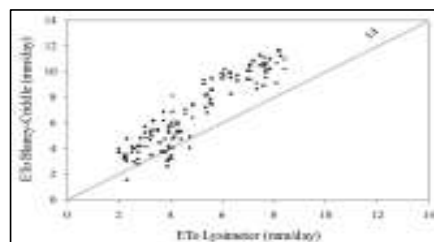

(o)

324
325
326
327
328

Figure 2. Comparison of ETo measurement with different estimation methods

329 The capabilities of models found in this study, while reported by others, were different. Although, for
330 daily, smoothed daily, mean 10-day and mean monthly ETo were estimated by Penman-Monteith,
331 Hargreaves-Samani, Jensen-Haise, Turc, Priestley-Taylor, FAO-Blaney-Criddle, FAO-Radiation and
332 Pan Evaporation equations and a linear regression equation was obtained for the estimated and
333 measured values [2811]. They compared the results of the equations with ETo data from a weighing
334 type lysimeter and ranked results of different methods according to statistical and error analysis. The
335 results indicated that the FAO-Radiation and Hargreaves-Samani were the most appropriate methods
336 while the Priestley-Taylor method was the least appropriate. The Penman-Monteith ranked in third to
337 fifth on the list according to the duration of mean values.

338 The estimated ETo by Hargreaves-Samani method was more appropriate than those obtained by the
339 Penman-Monteith method while the FAO-Radiation method showed the best results [2028]. The
340 slope of linear relationships between ETo estimated by the Hargreaves-Samani and Penman-
341 Monteith methods and measured ETo by lysimeter were close to 1.0 [4529].

342 Hourly ETo estimations obtained by Penman-Monteith under the semiarid climate of Kerman, Iran.
343 Hourly ETo estimations obtained from the proposed method were compared with measured ETo
344 values by using a large weighing electronic lysimeter during the months of April to September, 2005.
345 The results showed that FAO-56 Penman-Monteith underestimated ETo values by 18.4, 19.3, 26.3,
346 20.4, 21.4 and 22.1% for the months of April to September, respectively [330].

347 ETo calculation by seven different equations and comparison with lysimeter data in a semi-arid
348 climate and that the PM method obtained the best and most accurate equation [2331]. The same
349 results also were reported by [45]; [3032] and [733]. They reported that the PM performed much
350 better in humid regions. Although, the PM has a weakness of meteorological data as compared to
351 input demands among the other models, particularly in the developing countries with the shortage of
352 sufficient data. The results of this study and their comparison with those of other researches showed
353 that the perfect selection of simple and complex methods in a region based on available
354 meteorological data needs to consider results and calibrations either by lysimetric or by PM method
355 for precise regional practical purposes because, as suggested by [2434] human activity and natural
356 factors have a certain influence on the spatial variation of ETo, and a decisive role in the spatial
357 variation character of reference evapotranspiration in an investigated area.

358

359 4. CONCLUSIONS

360 The performance of nine ETo methods were evaluated and compared with Lysimeter measurement
361 data to choose the appropriate methods with the best results to estimate and project ETo in a semi-
362 arid climate area. The Lysimetric experiments were carried out in two years from 2012 to 2013 from
363 months of April to July. The cross correlation (R^2), slope, intercept and RMSE, MBE and t-test
364 statistical methods were used to compare the lysimeter ETo values with the ETo values computed by
365 nine different methods. The methods were ranked according to RMSE. Based on RMSE values, the
366 PM, MA and HG methods estimated the lysimeter ETo values most closely and PK and PF methods
367 had the worst results. The use of PM, MA and HG methods for ETo estimation, irrigation planning
368 and scheduling, dams reservoirs design and different surface or pressurized irrigation can help project
369 water requirement application under different crop pattern conditions in the semi-arid region under
370 study where complete weather data and only radiation and temperature records are available.

371 5. REFERENCES

- 372
- 373 [1] Chuanyan Z, Zhongren N, Zhaodong F. GIS-assisted spatially distributed modeling of the
374 potential evapotranspiration in semi-arid climate of the Chinese Loess Plateau. *Journal of Arid
375 Environments*. 2004;58: 387-403.
- 376 [2] Allen RG, Jensen ME, Wright JL, Burman RD. Operational estimates of reference
377 evapotranspiration. *Agron J*. 1989;81:650-662.
- 378 [3] Rosenberg NJ, Blad BL, Verma SB. *Microclimate, the Biological Environment*. Second
379 Edition. John Wiley and Sons, New York, 495. 1983.
- 380 [4] Grismer ME, Orang M, Snyder R, Matyac R. Pan evaporation to reference
381 Evapotranspiration Conversion Methods. *J. Irrigation and Drainage Eng*. 2002;128(3):180-184.
- 382 [5] Allen RG, Pereira LS, Raes D, Smith M. *Crop Evapotranspiration-Guidelines for Computing
383 Crop Water Requirements*. FAO Irrigation and Drainage Paper 56, FAO, Rome, Italy. 1998.
- 384 [6] Trajkovic S, Kolakovic S. Evaluation of reference evapotranspiration equations under humid
385 conditions. *Water Resource Management*. 2009; 23:3057-3067.
- 386 [7] Mendonça JC, Sousa EF, Bernardo S, Dias GP, Grippa S. Comparação entre métodos de
387 estimativa da evapotranspiração evapotranspiração de referência (ETo) na região Norte
388 Fluminense, RJ. *Revista Brasileira de Engenharia Agrícola e Ambiental*. 2003;7(2), 275-279.
389 Portuguese.

390 [8] Tabari H. Evaluation of reference crop evapotranspiration equations in various climates.
391 Water Resource Management. 2010; 24: 2311-2337.

392 [9] Jensen ME, Burman RD, Allen RG. Evapotranspiration and irrigation water requirements.
393 ASCE Manual and Rep. on Engg. Pract. No. 70. ASCE, New York. N.Y. 1990.

394 [10] Douglas EM, Jacobs JM, Sumner DM, Ray RL. A comparison of models for estimating
395 potential evapotranspiration for Florida land cover types. J. Hydrol. 2009;373: 366-376.

396 [11] Razzaghi F, Sepaskhah AR. Assessment of nine different equations for ETo estimation
397 using lysimeter data in a semi-arid environment. Arch of Agro and Soil Sci. 2010; 56:1-12.

398 [12] Rashid Niaghi A, Majnooni-Heris A, Zare Haghi D, Mahtabi GH. Evaluate Several Potential
399 Evapotranspiration Methods for Regional Use in Tabriz, Iran. J. Appl. Environ. Biol. Sci. 2013;
400 3(6): 31-41.

401 [13] Oliviera IB, Demond AH, Salehzadeh A. Packing of Sands for production of homogeneous
402 porous media. Soil Sci. Soc. Am. J. 1996;60(1): 49-53.

403 [14] Klute A. Methods of soil analysis. Part 1: Physical and mineralogical methods, 2nd Ed.,
404 American Society of Agronomy, Soil Science Society of America, Madison, WI. 1998.

405 [15] Doorenboss J, Pruitt WO. Guidelines for predicting crop water requirements. FAO Irrigation
406 and Drainage Paper No. 24 FAO, Rome, Italy. 1975.

407 [16] Doorenboss J, Pruitt WO. Crop water requirements. FAO Irrigation and Drainage Paper
408 No. 24. 1977a.

409 [17] Doorenboss J, Pruitt WO. Guidelines for predicting crop water requirements. Revised
410 1997. FAO Irrigation and Drainage Paper No. 24 FAO, Rome, Italy. 1977b.

411 [18] Wright JL. New evapotranspiration crop coefficients. Journal of the Irrigation and Drainage
412 Division ASCE. 1982;108 (IR2).

413 [19] Turc L. Estimation of irrigation water requirements, potential evapotranspiration: a simple
414 climate formula evolved up to date. Ann. Agron. 1961; 12:13-49.

415 [20] Hargreaves GH, Samani ZA. Estimating potential evapotranspiration. Tech. Note. J.
416 Irrigation and Drainage Eng. 1982.

417 [21] Hargreaves GH, Samani ZA. Reference crop evapotranspiration from temperature. Applied
418 Eng. Agriculture. 1985;1(2): 96-99.

419 [22] Makkink GF. Testing the Penman formula by means of lysimeters. J. Inst. Water Eng.
420 1957;11(3): 277- 288.

- 421 [23] Priestley CHB, Taylor RJ. On the assessment of surface heat flux and evaporation using
422 large scale parameters. Mon. Weath. Rev. 1972;100: 81-92.
- 423 [24] Blaney HF, Criddle WD. Determining water requirements in irrigated areas from
424 climatological and irrigation data: U.S. Soil Conservation Service Technical Paper 96. 1950.
- 425 [25] Blaney HF, Criddle WD. Determining consumptive use and irrigation water requirements:
426 U.S. Department of Agriculture Technical Bulletin 1275. 1962.
- 427 [26] Jacovides CP, Kontoyiannis H, Statistical procedures for the evaluation of
428 evapotranspiration computing models. Agric. Water Manage. 1995;27 (3-4): 365-371.
- 429 [27] Jacovides, CP. Model comparison for the calculation of linke's turbidity factor. International
430 J. Climatology. 1997;17: 551-563.
- 431 [28] ~~Hargreaves GH, Samani ZA. Estimating potential evapotranspiration. Tech. Note. J.~~
432 ~~Irrigation and Drainage Eng. 1982; Lecina S, Martinez-Cob A, Perez PJ, Villalobos FJ. Fixed~~
433 ~~versus variable bulk canopy resistance for reference evapotranspiration estimation using the~~
434 ~~Penman-Monteith equation under semiarid conditions. Agr. Water Manage. 2003;60:181-198.~~
- 435 [29] Hargreaves GH, Allen RG. History and evaluation of Hargreaves evapotranspiration
436 equation. J. Irrig. Drain. Engineer. 2003;129(1):53-63.
- 437 [30] Bakhtiari B, Lighat A, Khalili A, Khanjany Mj. Evaluation of two evapotranspiration model
438 based on hourly data in Kerman climate condition. Agri. Nat. scie. J. 2010; 50: 13-26. In
439 Persian.
- 440 [31] Lopez-Urrea R, Martin de Santa Olalla F, Fabeiro C, Moratalla A. Testing
441 evapotranspiration equations using lysimeter observations in a semiarid climate. Agr. Water
442 Manage. 2006; 85:15-26.
- 443 [32] Steiner JL, Howell TA, Schneider AD. Lysimetric evaluation of daily potential
444 evapotranspiration models for grain-sorghum. Agron Journal. 1991;83: 240-247.
- 445 [33] DehghaniSanij H, Yamamoto T, Rasiah V. Assessment of evapotranspiration estimation
446 models for use in semi-arid environments. Agr Water Manage. 2004; 64:91-106.
- 447 [34] Lingling Z, Jun X, Leszek S, Zongli Li. Climatic Characteristics of Reference
448 Evapotranspiration in the Hai River Basin and Their Attribution. Water. 2014;6:1482-1499.

Comment [ET9]: This reference is the NUMBER [20]! According to previous versions it could refers to Lecina et al 2003. PLEASE, CHECK THE CORRESPONDENCE WITH THE TEXT.