

Original research Articles

Integrated Process for β -glucan Concentrate from *Ganoderma lucidum* by Extraction and Micronization

ABSTRACT

Hydrothermal treatment is an environmentally friendly technique with a wide range of applications such as extraction, hydrolysis, and wet oxidation of organic compounds. In this work, water under hydrothermal conditions was used to extract β -glucan from *Ganoderma lucidum* (*G. lucidum*) at 433 K and 4.0 MPa using a semi-batch system. The extracts were then directly atomized and contacted with a hot inert gas to produce microsphere particles. When nitrogen was used as the inert gas, the moisture evaporated faster than when normal air was used at the same inlet gas temperature. Scanning electron microscopy (SEM) images showed that corrugated particles were obtained, with diameters varying from 3 to 20 microns. The β -glucan content in the particle products was 40 to 45% in weight, approximately.

Keywords: *G. lucidum*; β -glucan; Extraction; Nitrogen; Autohydrolysis

1. INTRODUCTION

Plant biomass, including agricultural and forestry residues, large portions of municipal solid waste, and herbaceous and woody plants, is the most abundant renewable resource of the world. The main components of plant biomass are cellulose (40-45 wt %), hemicellulose (25-35 wt %), and lignin (15-30 wt %) [1]. As a primary component of plant biomass, hemicellulose, which is mainly composed of xylans, provides an important source of interesting molecules such as xylose and xylo-oligosaccharides, which have potential applications in different fields, notably in the chemical, food, and pharmaceutical industries. In addition, due to the presence of glucan functional groups in hemicellulose, polymeric or oligomeric hemicellulose can possibly be used in health applications [2-5]. To increase the value of biomass components, they need to be separated into their components. Hence, the fractionation of plant biomass components has become an important topic.

Recently, hydrothermal extraction has become a technique that has gained much attention as an important process and is the most widely used technology for extracting polysaccharides [5-10]. This technology is based on the use of water as an extractant at temperatures above its boiling point (373 K) and below its critical point (647 K) and at a pressure high enough to maintain the liquid state. This work demonstrates that water soluble compounds containing β -glucan from hydrothermal extraction at 433 K and the microparticulate formation of them into powders from *G. lucidum* is a one step-process. Generally, hemicellulose is branched, with the degree of polymerization (DP) ranging from less than 100 to about 200 units [11]. Because of its structure and branched nature, hemicellulose is amorphous and relatively easy to hydrolyze to its monomer sugars compared with cellulose [12]. Therefore, water at 393 K can extract hemicellulose from wood [6].

In our previous work [10], microparticulate powders were directly generated during the extraction process to maintain or increase the concentration of β -glucan in the aqueous

extract. The water evaporated instantaneously when the aqueous extract was co-currently contacted with hot air via a nozzle. However, this microparticle formation process exhibits extremely complex behaviours because many process and formulation variables need to be tuned correctly to achieve the desired result [13]. In order to develop a new technique, the normal air was replaced with nitrogen gas under similar conditions. It provides an inert atmosphere for long-term preservation once the drying process is complete. Therefore, this work focused only on the morphology of the particles formed.

2. MATERIAL AND METHODS

2.1 Materials

G. lucidum obtained from Refarmer Co., Ltd. (Kumamoto, Japan) was used as a starting material. It was shredded by a laboratory mill to a particle size of < 2 mm and passed through 16-mesh sieves. The sample was then refrigerated at < 278 K. Distilled water obtained from a water distillation apparatus (Shibata Co., model PW-16, Japan) was used as a solvent. Potassium hydroxide (KOH, 85.0%), Sodium hydroxide (NaOH, 97.0%), Hydrochloric acid (HCl, 35.0~37.0%), and Acetic acid (CH₃COOH, 99.9%) were purchased from Wako Pure Chemicals Industries Ltd., Japan, and were used without further purification. Nitrogen (N₂) gas was purchased from Sogo Kariya Sanso, Inc. Japan.

2.2 Experimental Setup and Procedure

The apparatus consisted of an extraction unit and a precipitation unit [10]. The main apparatus for extraction unit consisted of: a high-pressure pump (LC-6AD Shimadzu, Japan); electric water heater (ESPEC ST-110, Japan); reactor (10 ml in volume; Thar Design Inc., USA); and back-pressure regulators (BPRs; AKICO, Japan). The precipitation unit consisted of an air compressor, heater, chamber, nozzle, and aspirator, and allowed the production of particles from liquid fraction products via atomization. The experiment was conducted at 433 K and 4 MPa. The inlet dry nitrogen gas temperatures of 408, 443, and 473 K corresponded to the outlet dry nitrogen gas temperatures of approximately 335, 342, and 349 K, respectively. These conditions were selected based on the previous report [10]. The fine powdery products were collected using a filter, which was placed before the aspirating pump. The morphologies of the powder products were observed using a scanning electron microscope (Hitachi S-4300, Japan). The powder particle diameters were determined from the SEM images using the image analyser software ImageJ 1.42 (National Institutes of Health, USA).

3. RESULTS AND DISCUSSION

The particles form through a spray drying process, which consists of three operating steps: atomization, water evaporation, and powder collection. The feed (aqueous extract) is sprayed via a nozzle (atomizer) into a drying chamber. Aided by the large specific surface area of the droplets, the water evaporation in the drying chamber takes place in matter of seconds. The dried powder is protected from overheating by the rapid removal of the solvent from the drying zone. Finally, the dry particles are carried into the cyclone and settle in the product collector. Instead of air, dry nitrogen gas was used as an inert gas to improve the drying process. Fig. 1 shows the SEM images of the particles formed from water-soluble compounds extracted from *G. lucidum* and then directly contacted with the dry nitrogen gas to remove their water content. It is clear that the obtained particles had different morphologies under different conditions. The morphology of the particles produced via spray drying depends on the drying air inlet temperature, drying air outlet temperature, drying air flow rate, atomizing air flow rate, and residence time. Of these parameters, the drying air outlet temperature is the dominating factor in controlling the drying rate and important particle characteristics such as particle shape and moisture content. Therefore, when the

water content of the droplet reaches a critical value, a dry crust is frequently formed at the droplet surface. If the droplet is dried very slowly, it is transformed into a fully dried particle. At high drying temperatures, cycles of repeated expansion and collapse of the particle occur due to the formation of an internal air bubble [14-16].

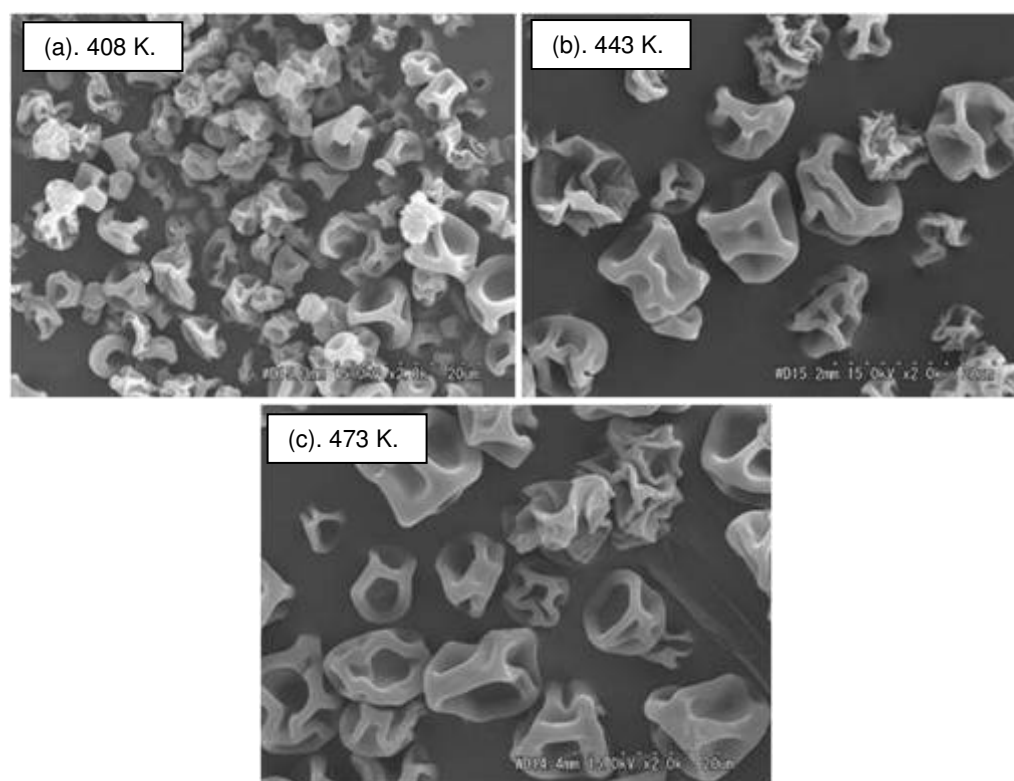


Fig. 1. SEM images of generated particles with different inlet nitrogen gas contact temperatures.

As shown in Fig. 1, surface corrugation of particles occurred at various drying gas inlet temperatures. In our previous work [10], at a low gas inlet temperature (408 K), the microparticles were successfully generated with spherical morphology and smooth surfaces with a particle size distribution between 0.5 and 6.0 μm . This phenomenon could be explained by the fact that the diffusional motion of the solutes is fast compared to the radial velocity of the receding droplet surface and is typically associated with spherical and solid particle formation. The surface corrugation of particles occurred when the gas inlet temperature increased at 443 and 473 K. It is obvious that the temperature had almost no effect on the morphology of the particles, which presented well-defined spherical smooth surfaces. In this case, the surface (skin) moves faster than the dissolved or suspended components. In this work, all the experimental results showed that corrugated particles have been formed. By using nitrogen as the inert gas, it was found that the moisture evaporated faster than when using normal air. The possible reason for this relates to the physical properties of the different gases; the specific heat capacity of nitrogen was higher than that of normal air under the same conditions. Therefore, when using chambers of the same volume, nitrogen could absorb more heat from the heater (heat exchanger) and release more heat when flowing over the extract droplets in the chamber. Hawlader et al. used

nitrogen as the drying media and experimentally investigated the drying kinetics and quality of the heat pump dryer products [17]. They reported reduced browning, faster rehydration, and enhanced vitamin C retention in the final products and highlighted the great potential of the modified atmosphere heat pump drier in the food drying industry. In addition, the high drying rate of nitrogen also influenced the sizes of the particles formed.

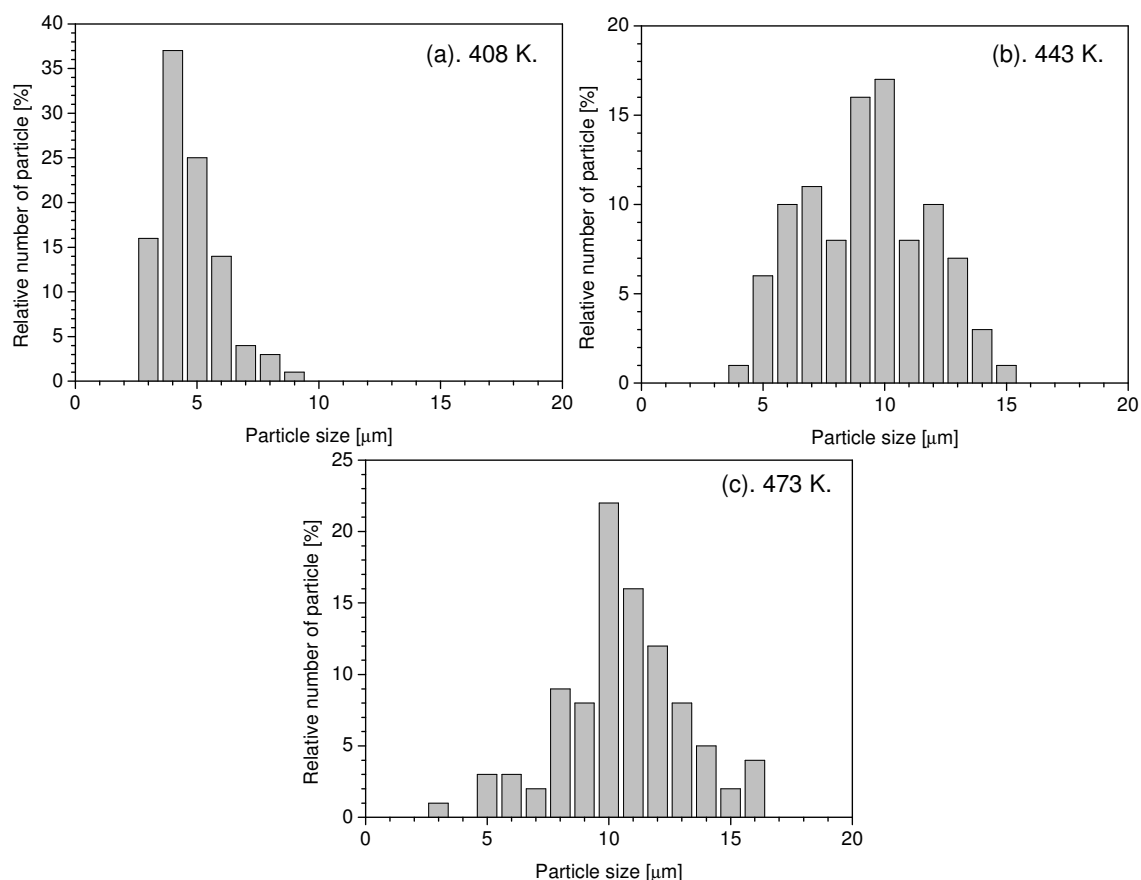


Fig. 2. Particle size distribution of powders produced with different inlet nitrogen gas contact temperatures.

Figure 2 described the particle size distributions of the powder products had average diameters of (a) 4.7, (b) 9.3, and (c) 10.9 μm , respectively. The geometric diameter of particles that are not perfect spheres depends on their orientation. In this case, an average geometric diameter can be substituted, e.g., by averaging the Feret's horizontal and vertical diameters [13,18]. The result clearly showed that the use of a higher inlet air temperature led to the production of larger particles, which is related to the higher swelling caused by the higher temperature [19,20]. Tonon et al. explained that drying at higher temperatures results in faster drying rates, which leads to the early formation of a structure and does not allow the particles to shrink during drying [20]. When the inlet air temperature is low, the particle remains shrunk, and thus, retains its smaller diameter. In the current study, the heat exchanger attached to the apparatus was modified. This modification was expected to allow the use of various gases. Therefore, air, nitrogen, and other inert gases as atomizers could be applied as a mixture of gases or as a pure gas.

171 To understand the β -glucan contents in the particle products, a mushroom and yeast β -
 172 glucan assay kit (Megazyme International Ireland Ltd., Wicklow, Ireland) was used following
 173 to the manufacturer's instruction. The absorbance of the solution samples was measured by
 174 using UV-vis spectrophotometry at 510 nm (UV-vis spectrophotometry V-550, Jasco
 175 Corporation, Japan). 5 mg of particles dissolved in water was suspended in 1.5 mL of
 176 concentrated HCl (37% v/v) and incubated at 303 K for 45 min; 10 mL distilled water was
 177 then added, and it was placed in a boiling water bath for 120 min. The pH was neutralized
 178 with 10 mL of 2 M KOH, followed by centrifugation for 10 min. 0.1 mL of the solution was
 179 digested with an aliquot of exo-1,3- β -glucanase (20 U/mL) plus β -glucosidase (4 U/mL) in
 180 200 mM sodium acetate buffer (pH 5.0). The hydrolysates were incubated with 3.0 mL of
 181 glucose oxidase-peroxidase mixture (GOPOD) at 313 K for 1 h. The total glucan content (α -
 182 and β -) was observed by introducing this solution into UV-vis spectrophotometry at 510 nm.
 183 The content of α -glucan was also measured at the same wavelength. 5 mg of particles
 184 dissolved in water was suspended in 2 mL of 2 M KOH for 20 min and neutralized with 8 mL
 185 of 1.2 M sodium acetate buffer (pH 3.8). Then, the solution was centrifuged for 10 min and
 186 aliquots of amyloglucosidase (1630 U/mL) plus invertase (500 U/mL) were added to the 0.2
 187 mL of solution, followed by incubation at 313 K for 30 min. The solution was incubated with
 188 3.0 mL of glucose oxidase-peroxidase mixture at 313 K for 20 min. The amount of β -glucan
 189 was counted by subtracting α -glucan from the total glucan content. The result showed that
 190 the β -glucan content in the particle products was 40 to 45% in weight, approximately. Since
 191 the content of water-soluble β -glucan from *G. lucidum* was around 10 to 50 % [21], it could
 192 be said that this technique may extract and concentrate the most of water-soluble β -glucan
 193 from *G. lucidum*.

194 Hydrothermal extraction could be defined as an extraction process in which water at a
 195 temperature of between 373 K and 647 K (critical temperature) and a pressure higher than
 196 that of its vapor saturate, up to 22.1 MPa, to maintain the water in its liquid state. This type of
 197 process was also called autohydrolysis. Under hydrothermal conditions, *G. lucidum*
 198 components underwent degradation reaction into its backbone units. Fig. 3 showed SEM
 199 images of *G. lucidum* before and after hydrothermal treatment at various temperatures.
 200 Before hydrothermal treatment, the morphologies of *G. lucidum* were pointed by some
 201 boundary sides clearly. They exhibited essentially regular and compact surface structure,
 202 and a highly fibrillar and intact morphology. After treatment by hydrothermal, the physical
 203 structures disruption of *G. lucidum* occurred and clearly found at each operating condition.
 204 Probably, the hydrothermal treatment allows to disrupt the structure of *G. lucidum* that
 205 contains carbohydrates, lignin, protein, and lipids as main components similar to plants
 206 biomass. As shown in Fig. 3, the physical structures of *G. lucidum* changed clearly with
 207 increasing hydrothermal extraction temperatures from 403 to 463 K. The structural
 208 breakdown of many fibers occurred via defibration process. At the higher temperatures of
 209 hydrothermal treatment, defibration of many fibers occurred extensively. The textures of *G.*
 210 *lucidum* after hydrothermal treatment seemed different from that of the original *G. lucidum*
 211 since some materials melted and resolidified. Some cracks were also apparent on the
 212 defibrated fibers surface. These showed the cell wall of *G. lucidum* was crushed, expressing
 213 the release of their components to dissolve in water at hydrothermal conditions.

214
 215
 216
 217
 218
 219
 220
 221
 222

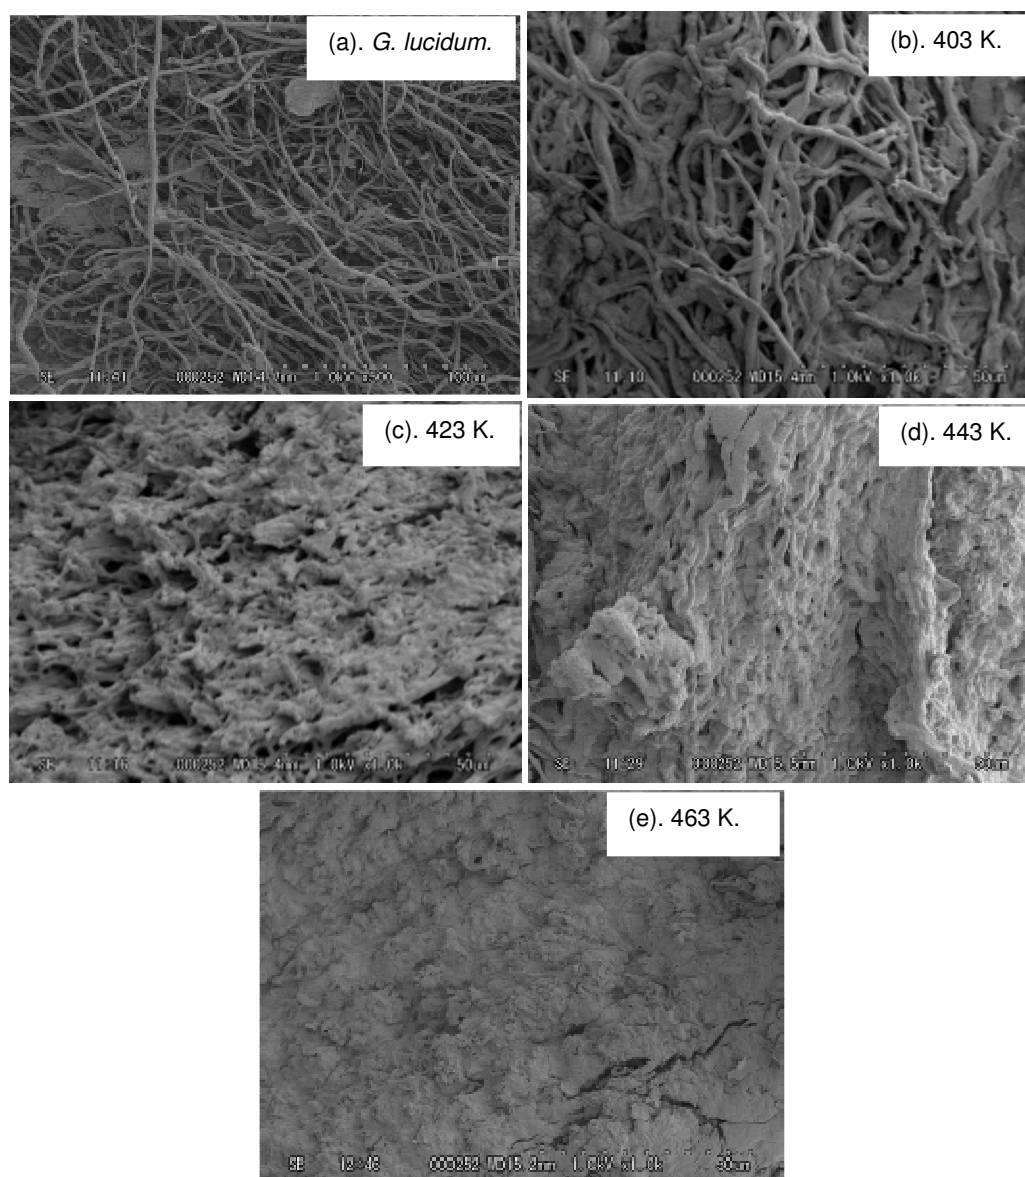


Fig. 3. Particle size distribution of powders produced with different inlet nitrogen gas contact temperatures.

Since the plants biomass such as *G. lucidum* consisted of the various components, the extraction of b-glucan from *G. lucidum* via degradation process at hydrothermal conditions seems extremely complex. Hence, the studying of biomass model compounds conversion is very useful to explain the hydrothermal extraction process [4,22-24]. Toor et al. explained that the degradation of plants biomass components in hydrothermal conditions differ; however, the basic reaction mechanisms can be listed as follows: first, depolymerization of the plants biomass following by decomposition of plants biomass monomers by cleavage, dehydration, decarboxylation and deamination [22]. Then the recombination and repolymerization of reactive fragments. Ruiz et al. described clearly the hydrolysis of cellulose to glucose in hydrothermal conditions [24]. They explained that initially the water as

a major constituents of extraction system underwent auto-dissociation to produce hydrogen ion (H^+) and hydroxide ion (OH^-). At these conditions, the auto-dissociation of water molecules is believed 3 orders of magnitude larger than that at ambient conditions. The increased amount of ions from the water will make acid and base catalyzed reactions far more likely to occur at these conditions than at ambient. The generated H^+ ion interacts the oxygen atom in the β -1,4-glycosidic bond to generate conjugate acid continued by the glycosidic bond split and leads to the two glucose units. The OH^- ion will attack at the anomeric carbon atom, renders the split of the O bridge and again yields the two glucose units. Water molecules and the glycosidic bond split simultaneously and form two glucoses again. By extension of these reactions, glucose monomers were generated.

4. CONCLUSION

Hydrothermal extraction of β -glucan from *G. lucidum* was conducted at 433 K and 4.0 MPa using a semi-batch system. Under these conditions, thermal softening of *G. lucidum* occurred, allowing the removal of *G. lucidum* components that were protecting its other constituents via dehydrogenation and deoxygenation reactions. Next, the micronisation of the extract solution was carried out using an inert gas as a drying medium. The results showed that the moisture evaporated faster than when using normal air at the same inlet gas temperature. As a result, particle surface corrugation occurred in all experiments. The β -glucan content in the particle products was around 40 to 45% in weight. Since the system is suitable for isolating β -glucan from *G. lucidum*, it is proposed that this process can be applied to the isolation of β -glucan from other types of materials as well.

REFERENCES

1. Dorrestijn E, Laarhoven LJJ, Arends IWCE, Mulder P. The occurrence and reactivity of phenoxyl linkages in lignin and low rank coal. *J. Anal. Appl. Pyrolysis*. 2000;54:153.
2. Willfor S, Holmbom B. Isolation and characterisation of water soluble polysaccharides from Norway spruce and Scots pine. *Wood Sci. Technol*. 2004;38:173.
3. Fry SC, Nesselrode BH, Miller JG, Mewburn BR. Mixed-linkage (1 $\rightarrow$ 3,1 $\rightarrow$ 4)- β -D-glucan is a major hemicellulose of Equisetum (horsetail) cell walls. *New Phytol*. 2008;179:104.
4. Scheller HV, Ulvskov P. Hemicelluloses. *Annu. Rev. Plant Biol*. 2010;61:263.
5. Leppanen K, Spetz P, Pranovich A, Hartonen K, Kitunen V, Ilvesniemi H. Pressurized hot water extraction of Norway spruce hemicelluloses using a flow-through system. *Wood Sci. Technol*. 2011; 45:223.
6. Sattler C, Labbe N, Harper D, Elder T, Rials T. Effects of hot water extraction on physical and chemical characteristics of oriented strand board (OSB) wood flakes. *Clean Soil Air Water*. 2008;36:674.
7. Tunc MS, van Heiningen ARP. Hemicellulose extraction of mixed southern hardwood with water at 150 °C: Effect of time. *Ind. Eng. Chem. Res*. 2008;47:7031.
8. Hasegawa I, Tabata K, Okuma O, Mae K. New pretreatment methods combining a hot water treatment and water/acetone extraction for thermo-chemical conversion of biomass. *Energy Fuels*. 2004;18:755.

- 321 9. Allen SG, Kam LC, Zemmann AJ, Antal Jr MJ. Fractionation of sugar cane with hot,
322 compressed, liquid water. *Ind. Eng. Chem. Res.* 1996;35:2709.
- 323 10. Matsunaga Y, Wahyudiono, Machmudah S, Askin R, Quitain AT, Sasaki M, Goto M.
324 Hydrothermal extraction and micronization of polysaccharides from *Ganoderma lucidum* in a
325 one-step process. *BioResources.* 2013;8:461.
- 326 11. Gatenholm P, Tenkanen M. Hemicelluloses: Science and Technology. ACS Symposium
327 Series, Washington DC, 2003;864:2.
- 328 12. Yu Y, Lou X, Wu H. Some recent advances in hydrolysis of biomass in hot-compressed
329 water and its comparisons with other hydrolysis methods. *Energy Fuels.* 2008;22:46.
- 330 13. Vehring R. Pharmaceutical particle engineering via spray drying. *Pharm. Res.*
331 2008;25:999.
- 332 14. Walton DE, Mumford CJ. The morphology of spray-dried particles: the effect of process
333 variables upon the morphology of spray-dried particles. *Chem. Eng. Res. Des.* 1999;77:442.
- 334 15. Elversson JE, Millqvist-Fureby A, Alderborn G, Elofsson U. Droplet and particle size
335 relationship and shell thickness of inhalable lactose particles during spray drying. *J. Pharm.*
336 *Sci.* 2003;92:900.
- 337 16. Elversson JE, Millqvist-Fureby A. Particle size and density in spray drying effects of
338 carbohydrate properties. *J. Pharm. Sci.* 2005;94:2049.
- 339 17. Hawlader MNA, Perera CO, Tian M, Yeo KL. Drying of guava and papaya: impact of
340 different drying methods. *Drying Technol. Int. J.* 2006;24:77.
- 341 18. Vehring R, Foss WR, Lechuga-Ballesteros D. Particle formation in spray drying. *J.*
342 *Aerosol Sci.* 2007;38:728.
- 343 19. Nijdam JJ, Langrish TAJ. The effect of surface composition on the functional properties
344 of milk powders. *J. Food Eng.* 2006;77:919.
- 345 20. Tonon RV, Freitas SS, Hubinger MD. Spray drying of acai (*Euterpe Oleraceae* Mart.)
346 juice effect of inlet air temperature and type of carrier agent. *J. Food Process. Preserv.*
347 2011;35:691.
- 348 21. Coates PM, Betz JM, Blackman MR, Cragg GM, Levine M, Moss J, White JD.
349 *Encyclopedia of Dietary Supplements.* second edition, Informa Healthcare, London, UK,
350 2010:680.
- 351 22. Toor SS, Rosendahl L, Rudolf A. Hydrothermal liquefaction of biomass: A review of
352 subcritical water technologies. *Energy.* 2011;36:2328.
- 353 23. Matsunaga Y, Wahyudiono, Machmudah S, Sasaki M, Goto M. Hot compressed water
354 extraction of polysaccharides from *Ganoderma lucidum* using a semibatch reactor. *Asia-Pac.*
355 *J. Chem. Eng.* 2014;9:125.
- 356 24. Ruiz HA, Rodriguez-Jasso RM, Fernandes BD, Vicente AA, Teixeira JA. Hydrothermal
357 processing, as an alternative for upgrading agriculture residues and marine biomass

358 according to the biorefinery concept: A review. Renewable Sustainable Energy Rev.
359 2013;21:35-51.