

Original Research Article
**Effect of Acetylation on the Physical and
 Functional Properties of Industrial and
 Laboratory Cassava (*Manihot esculenta*)
 Starches**

ABSTRACT

Aim: Acetylated potato starch (APS) is commercially available and used widely in the food industries. It is imperative to study to the physical and functional properties of acetylated cassava (*Manihot esculenta*) cultivar Tropical Manihot Series (TMS) 30572 and industrial starches for possible substitution/ replacement of expensive APS in food system.

Study Design: The properties of acetylated cassava starches were compared with those of commercially available acetylated potato starch (APS) and native cassava starches.

Place and Duration of Study: The experiment was performed in the Department of Food Science and Technology, Federal University of Technology, Akure Nigeria from June 2011 and January 2013.

Methodology: Industrial starch and starch extracted from cassava TMS30572 were acetylated by standard procedure. The acetylated starches were analyzed for the physical as well as functional properties.

Results: The yields after acetylation ranged between 96-98% and 80-93% for TMS30572 and industrial starches, respectively. Acetylated cassava starches showed improved physical and functional properties over the native cassava starch and these increased with increasing concentration of acetic anhydride in the reaction medium. At >2.50% acetylation, starch concentration of 5.5% had the same hot paste viscosity of 1500cPa.s with commercial APS at 5% concentration. Also at 2.50% acetylation the starch was stable until the third freeze-thaw cycles and exhibited better stability than commercial APS.

Conclusion: Acetylation improved the yield of starch from cassava during processing. The industrial starch showed higher degree of acetylation than TMS30572 starch under the same experimental condition. Acetylated cassava starches (at >2.50-2.70% acetylation) has improved functional properties and lesser tendency towards retrogradation thus could be a potential replacement to the more expensive APS as ingredient in food system.

Keywords: *Keywords: cassava cultivar; food industry; freeze-thaw stability; retrogradation*

1. INTRODUCTION

Cassava (*Manihot esculenta* crantz) is widely cultivated along the tropical belt for its starchy tubers which are used as food, feed or as an industrial raw material. Starches are used in a wide range of food products and its incorporation into food system is primarily governed by factors such as gelation, pasting properties, apparent viscosity, solubility, swelling power and clarity [1].

Only few percentages of the world crop of starch are used in their native state. Modification is usually carried out to introduce the desired properties and or remove certain inherent undesirable characteristics of the native starches. Genetic and chemical modification produces functionally tailored starch products that meet specific application in the food industries and this has led to expanded usage of starch and its products [2, 3]. Modified (acetylated) starch cannot be readily broken down by digestive enzymes [4], thereby making it a desirable functional resistant starch with great health benefits [5].

Acetylation involves esterification of the hydroxyl functional group of starch to produce starch with altered polarity, lower pasting temperature and improved paste clarity and freeze-thaw properties. The detrimental syneresis and retrogradation effects are greatly reduced in acetylated starch thus making it very useful in frozen foods [6-8].

There is limited information on the effects of using graded amount of acetic anhydride to modify cassava starch and the properties of such modified starches. The present study aims at extraction and modification of cassava starch by acetylation technique using graded levels of acetic anhydride, and investigation of the changes in the functional and physical properties of the starch due to acetylation and also comparison of the observed properties with the commercially available acetylated potato starch in order to determine the suitability of the cheaply available cassava starch as alternative to APS in the food industry.

2. MATERIAL AND METHODS

2.1 Source of Materials

Cassava cultivar TMS 30572 was planted and harvested after 18 months on the research farm of The Federal College of Agriculture, Akure, Nigeria. The industrial starch was obtained from Matna Food Company Limited, Akure, Ondo State, Nigeria. A 2.5% acetylated potato starch was obtained from FAN MILK Plc. Ibadan, Nigeria.

2.2 Starch Extraction

Starches were extracted from cassava tubers according to the procedure described by KORDYLAS (1988).[9] The starch obtained was dried in a hot air oven (Labcon air oven model) at $55 \pm 2^\circ\text{C}$ for 48 h, then pulverized and sieved using 254 μm sieve.

2.3 Starch Acetylation

Starch acetylation was carried out using the method of Wurzburg [10] as modified by Golachowski [7]. Two hundred grams (200g; dry weight basis) of native cassava starch or TMS30572 cultivar was dispersed in distilled water the pH was adjusted to 8.0 with 3% NaOH. Predetermined volume of acetic anhydride was added to the slurry at a rate of 1ml/min. The pH was finally adjusted to 5.4 with 10% HCl. The starch was centrifuged at 1,000 x g and the residue washed with distilled water and dried at 30°C for 24 h to determine the yield. The dried acetylated starch samples were then pulverized, sieved to pass through 254 μm sieve packaged in plastic containers and kept in cool dry place for further analyses. In order to determine the degree of acetylation, 10g of the acetylated starch (dry weight basis) was added to 65ml of distilled water followed by 25mL of 0.5M NaOH with continuous mixing using a magnetic stirrer for 30 min as described by Golachowski [7].

70 2.4 Determination of Bulk Density and Sedimentation Volume

71 The bulk density was determined using the procedure of Narayana & Narasinga [11] with
72 slight modification. Sedimentation volume was determined as described by Raja et al. [12].

73 2.5 Determination of Water and Oil Absorption Capacity

74 A suspension of 1 g of starch (dry weight basis) was made in 10 ml of distilled water [or 10
75 mL of oil (executive chef® oil with density of 0.92 g/mL)]. The water and oil absorption
76 capacities of the starch samples were determined as described by Sathe et al. [13].

77 2.6 Determination of Viscosity, Swelling Power and Solubility

78 Starch suspension of 5% (w/v) in distilled water was heated to 90°C in a water bath with
79 continuous stirring. The paste was transferred to a rotatory viscometer and paste viscosity
80 was measured from 90°C through to 30°C at 10°C interval of the cooling phase and
81 expressed as centi Pascal second using the method of Amani et al. [14]. The method
82 described by Osundahunsi & Mueller [15] was then used in the determination of solubility
83 and swelling power of the starches.

84 2.7 Determination of Paste Clarity and Freeze-Thaw Stability

85 The paste clarity was determined using the procedure of CRAIG et al. (1989) [16]. On dry
86 weight basis, 1% aqueous dispersion of starch in distilled water was boiled at 100°C for 30
87 min under constant stirring. The paste was cooled to 30°C and the percentage transmittance
88 was measured at 640 nm. The freeze-thaw stability was investigated using the method of
89 Singh & Kaur [17]. Aqueous suspension of 5% w/v (dry weight basis) was prepared using
90 distilled water. The suspension was heated at 95°C for 30 min in a water bath and then
91 cooled with continuous stirring in order to prevent skin formation on the paste. The paste
92 was then subjected to a 5-cycle alternate freezing and thawing of 18 h and 3 h respectively.
93 At the end of each cycle, the paste was centrifuged at 5,000 x g for 10 min and the amount
94 of exudates calculated in percentage was determined and plotted against the number of
95 freeze-thaw cycle.

96 2.8 Statistical analyses

97
98 The data were subjected to analysis of variance (ANOVA) and the means were separated
99 using Duncan's multiple range tests using SPSS statistical package version 17.

100

101

102

103

104


105

106 3. RESULTS AND DISCUSSION

107

108 The degree of acetylation increased as the volume of acetic anhydride increased (Fig. 1).
109 This may partly be due to the larger surface area for diffusion and absorption of the acetyl
110 groups on the starch molecules. High concentration of acetic anhydride resulted in high
111 molecular collision rate leading to greater availability of acetic anhydride molecules in the
112 vicinity of starch [18]. Similar observations have been reported for corn [19]. The rasping
113 processing of industrial starch led to higher reaction efficiency compared to the TMS30572

cultivar, which resulted in higher degree of acetylation when the same amount of acetic anhydride was added. Mechanical processing of industrial starch causes damage to the granule structure thus increasing the susceptibility to enzymatic digestion than the undamaged starch granules [20].

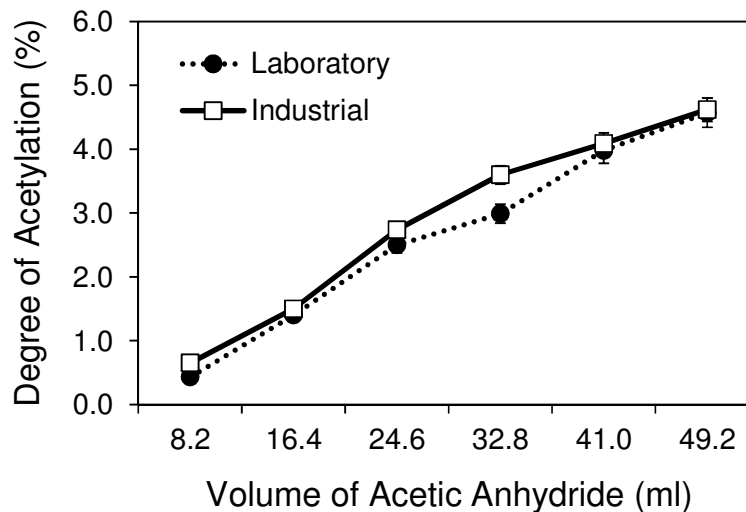

118

119 **Fig. 1: The relationship between the volume of acetic anhydride and degree of**
120 **acetylation of cassava starches.**

121 3.1 Effect of Acetylation on Yield, Sedimentation and Bulk Density

122 As shown in Table I, the yields of acetylated industrial starches (80 - 93%) were lower than
123 TMS30572 (96-98%) starches due to the high concentration of impurities in industrial
124 starches which were removed during the acetylation. The highest yield was observed at
125 acetylation of 2.99% and 3.98% for TMS30572, and 3.60% for the industrial starch. The
126 yields obtained were higher than the range of 82 - 88% reported earlier [18]. The sulphuric
127 acid used as a catalyst has the tendency to cause extensive solubilisation of the crystalline
128 structure during acetylation process and might have contributed to the observed higher yield.

129 The bulk density and sedimentation volume increased with increase in the degree of
130 acetylation of the starches (Table 1). Narayana & Narasinga [11] reported similar result for
131 winged beans flour. The sedimentation volume of the acetylated industrial starches was
132 significantly higher than the native starches. Hence, acetylated starches will exhibit better
133 cold water swelling than the native cassava starch.

134

135

Table 1. The effect of acetylation on the yield, sedimentation and bulk density of cassava starches

Laboratory (TMS 30572) starch				Industrial starch			
DoA (%)	Yield (%)	Sedimentation (mL)	Bulk Density (g/mL)	DoA (%)	Yield (%)	Sedimentation (mL)	Bulk Density (g/mL)

0	98.70±0.04	6.00±0.82 ^c	0.81±0.01 ^b	0	92.00±1.21	4.50±0.16 ^d	0.71±0.03 ^c
0.43	96.00±0.08	7.00±0.41 ^c	0.81±0.01 ^b	0.65	80.00±1.70	6.50±0.82 ^c	0.72±0.01 ^c
1.4	96.00±0.05	7.50±0.94 ^b	0.83±0.02 ^a	1.5	88.00±0.80	7.00±0.16 ^c	0.78±0.04 ^b
2.5	96.00±0.05	7.50±0.84 ^b	0.83±0.02 ^a	2.74	90.00±0.80	7.50±0.14 ^b	0.82±0.02 ^a
2.99	98.00±0.08	7.50±0.62 ^b	0.83±0.05 ^a	3.6	93.00±1.40	7.50±0.08 ^b	0.82±0.05 ^a
3.98	98.00±0.08	7.90±0.82 ^a	0.84±0.05 ^a	4.09	90.00±0.90	7.70±0.05 ^b	0.83±0.01 ^a
4.57	97.00±0.05	8.00±0.62 ^a	0.84±0.02 ^a	4.62	90.00±0.80	8.10±0.05 ^a	0.84±0.03 ^a
APS	ND	8.00±0.47 ^a	0.78±0.02 ^c	APS	ND	8.00±0.04 ^a	0.78±0.02 ^b

Values are Mean±SEM (n=3). Mean values with different letters in a column are significantly different (p≤0.05). DoA: Degree of acetylation; APS: acetylated potato starch; ND: not determined.

136

137

3.2 Swelling Power, Solubility, Water and Oil Absorption Capacities

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152


153

154

155

The swelling powers of the starches were investigated at temperature range of 50 – 90°C, representing the pasting range of most starches. Native starch exhibited an increase in swelling power with increasing temperature as shown in Fig. 2A and 2B. Swelling power has been reported to correlate with solubility in different varieties of sweet potato starches [21]. Acetylation increased the swelling power at any given temperature perhaps due to the loosening of intra- and inter-molecular bonds in the starch molecules, which eventually increased the swelling capacities of the starches. However, there was no significant difference in the swelling power of the acetylated starch at temperature >60°C when the degree of acetylation is above 2.50% for TMS30572 cultivar. Limited water available within the mixture at higher temperature may affect the swelling power as complete gelatinization and swelling do occur in excess water [20]. Solubility increased with increase in the degree of acetylation. There was a sudden rise in the solubility of the starch acetylated at 1.4% and 1.5% for TMS 30572 and industrial starches respectively at 60°C. At temperatures >60°C, the solubility could not be measured as shown in Fig. 2C and 2D. This might be due to total percolation of water into the starch granules, resulting in limited amount of water available in the mixture since acetylation lowers the gelatinization temperature. Singh et al. [22] have reported that acetylation decreased the gelatinization temperature of acetylated sorghum starch.


156

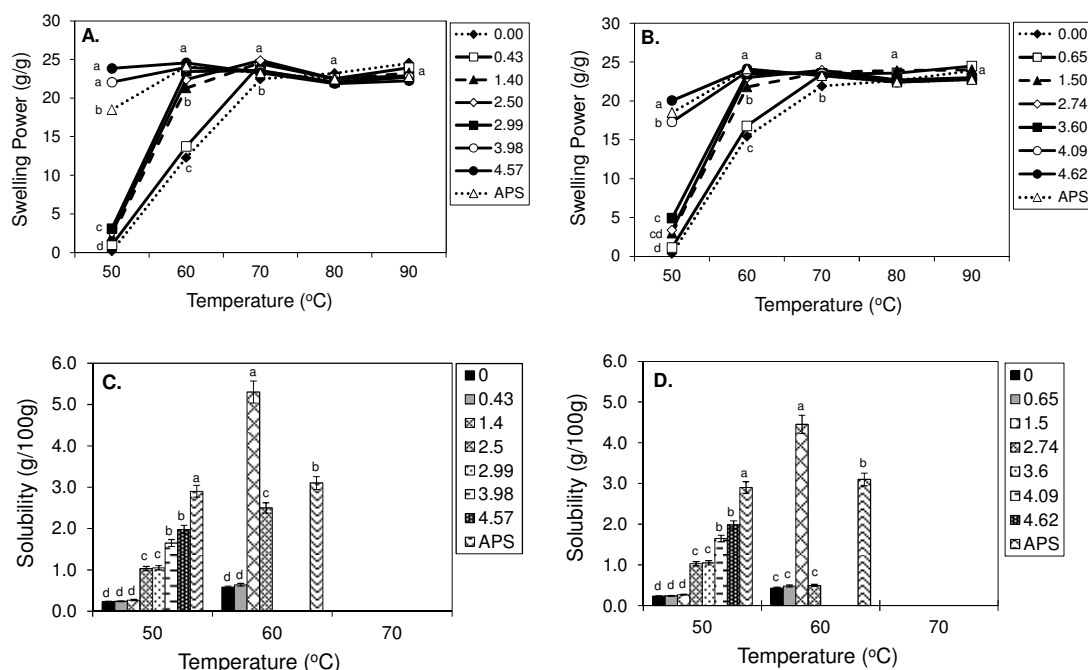

157

158 **Fig. 2: The effect of temperature on the swelling power and solubility of cassava**
 159 **starches at different degrees of acetylation for TMS 30572 (A and C) and industrial**
 160 **starches (B and D). Values represent mean±SD, (n=3). Mean values with the same**
 161 **alphabet within a particular temperature are not significantly ($p \leq 0.05$) different**
 162 **according to Duncan multiple range test.**

163 The water and oil absorption capacities (WAC and OAC) of the starches are shown in Fig. 3.
 164 All the starches absorbed more oil than water when acetylated. Similar result has been
 165 reported for acetylated sweet potato starch [23]. The result showed that acetylation altered
 166 the starch polarity and leads to the introduction of hydrophobic group into the starch
 167 molecules.

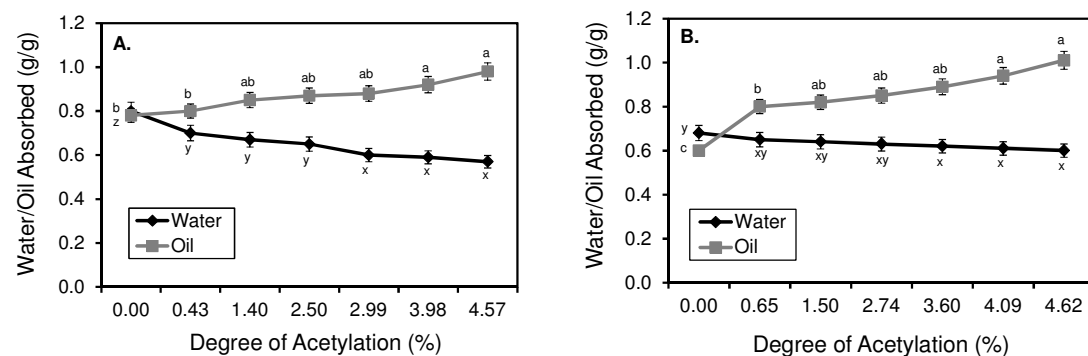

168

169 **Fig. 3: The effect of acetylation on the water and oil absorption capacity of TMS 30572**
 170 **(A) and industrial starches (B). Values represent mean±SEM, (n=3). Mean values with**
 171 **the same alphabet are not significantly ($p \leq 0.05$) different according to Duncan**
 172 **multiple range test.**

173

3.3 Paste Viscosity and Clarity

The viscosity of cooked starch is important to the food industry. The peak viscosity of APS is significantly higher than the cassava starches. As the temperature drops from 90°C to 70°C the viscosity remained fairly constant before it began to increase as the temperature falls below 70°C for both starches (Figure 4A and B). The native starch showed higher paste viscosity than the acetylated starches when cooled to 30°C. Both acetylated TMS30572 cultivar and industrial starches showed lesser cooling viscosity suggesting reduced tendency towards retrogradation than the commercial acetylated potato starch (APS). Similar observation had been reported for sorghum starch where acetylation led to a decrease in the paste viscosity [22]. Substituent groups formed at lower temperature restricted the tendency of the starch molecules to realign after cooling, thus facilitating lower setback value and retrogradation for acetylated starches [24].


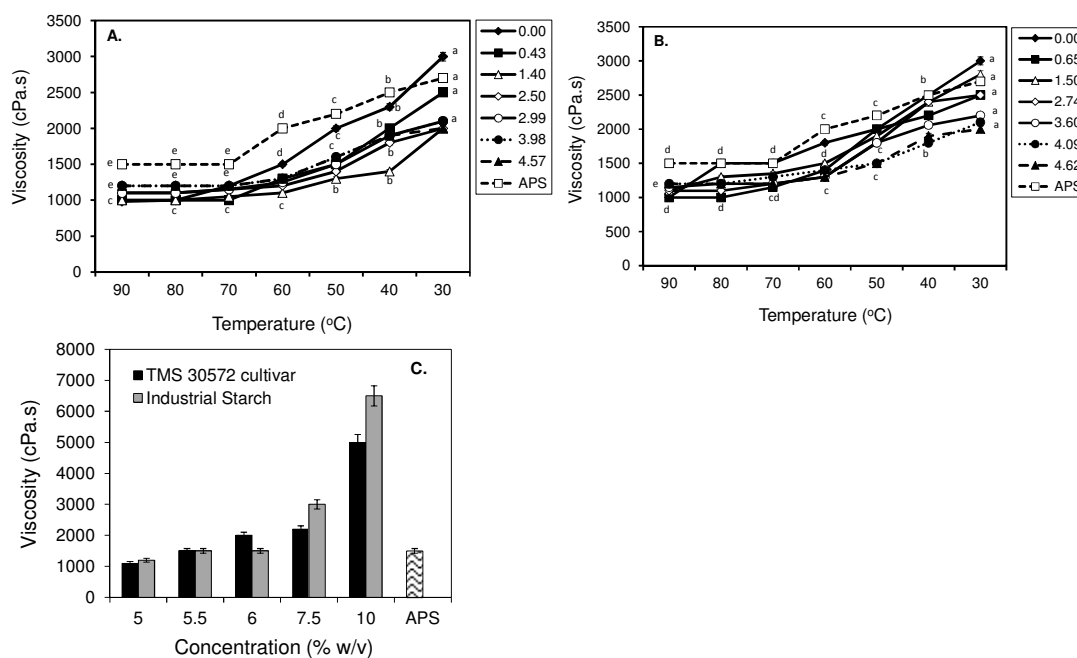


Fig. 4: The effect of temperature and starch concentration on paste viscosity of cassava starches. (A) TMS 30572, (B) industrial starch at different degrees of acetylation, (C) the effect of starch concentration on the paste viscosity of TMS 30572 starch acetylated at 2.5% and industrial starch acetylated at 2.74% compared with APS (acetylated potato starch) at 5% starch concentration. Values represent mean±SEM, (n=3). Mean values with the same alphabet across the temperature ranges are not significantly ($p \leq 0.05$) different according to Duncan multiple range test.

In attempt to determine the starch concentration that will match-up in hot paste viscosity to the acetylated potato starch, cassava starch at different concentration were acetylated at 2.5% and the hot paste viscosity determined at 90°C. At 5% starch concentration, the hot paste viscosity was lower than that of the acetylated potato starch at 5% concentration (Fig. 4C). However as the starch concentration increased, the hot paste viscosity also increased. The light transmittance values of the pastes increased progressively with increase in the degree of acetylation for all the starches (Fig. 5). Increase in the degree of swelling and

dispersion of the starch granules as well as reduced retrogradation tendency may also be responsible for the observed results [8, 17].

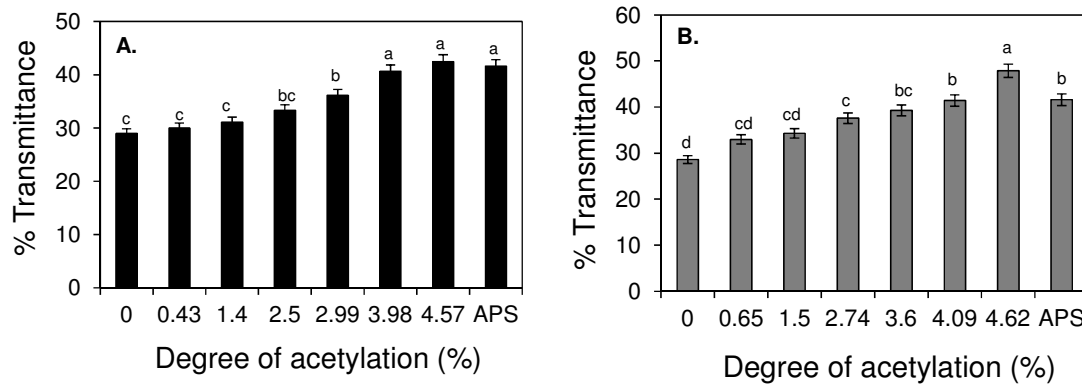

204

205 **Fig. 5: The effect of acetylation on the paste clarity of laboratory (TMS 30572) starch**
 206 **(A) and industrial starch (B) measured as percentage transmittance. Values represent**
 207 **mean±SD, (n=3). Mean values with the same alphabet are not significantly ($p \leq 0.05$)**
 208 **different according to Duncan multiple range test.**

209

210 3.4 Freeze-Thaw Stability

211 The pastes of roots and tubers starches are known to exhibit great stability under normal
 212 condition but cannot survive freeze-thaw cycles [25]. This poor freeze-thaw stability of native
 213 starch limits its application as a thickening agent in frozen foods [26]. Cassava starches
 214 exhibited unusual stability at higher degree of acetylation. TMS 30572 cultivar at acetylation
 215 level of 2.50% did not show any syneresis until the third freeze-thaw cycle when it exuded
 216 13% water. At $\geq 3.98\%$ degree of acetylation, there was no syneresis until the fourth freeze-
 217 thaw cycle with 16% exudates (Fig. 6). The waxy corn and Peruvian carrot starch gels
 218 exhibited similar freeze-thaw stability [26]. The percentage exudates decreased as the
 219 degree of acetylation increased. Jacobson et al. [27] have observed that in native pastes,
 220 the hydroxyl groups of starch gradually re-associate through hydrogen bonding and
 221 crystallize out of solution leading to syneresis when paste is allowed to cool or when
 222 refrigerated. Commercial acetylated potato starch exhibited the lowest stability with greater
 223 exudates due to syneresis when compared with all the acetylated cassava starches.

224

225

226

227

228

229

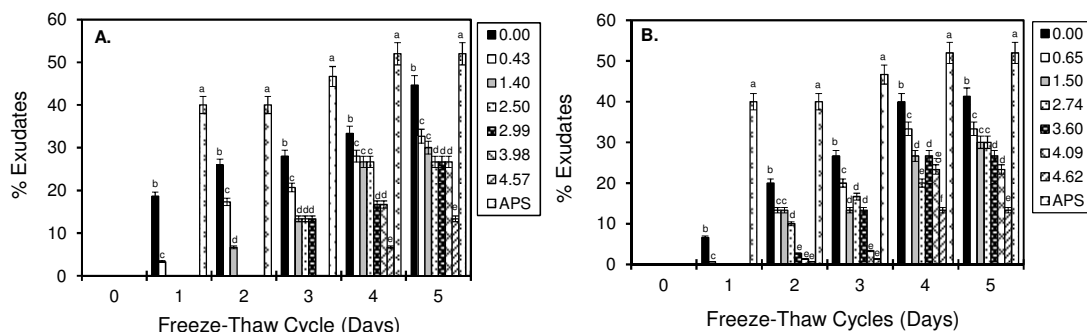


Fig. 6: The effect of acetylation on the freeze-thaw stability of laboratory (TMS 30572) starch (A) and industrial starch (B). Values represent mean \pm SD, (n=3). Mean values with the same alphabet at a particular day are not significantly ($p\leq 0.05$) different according to Duncan multiple range test.

4. CONCLUSION

Processing methods used for cassava starch isolation have influence on reaction efficiency of the final products. There was over 80% yield after acetylation, with improvement on the physical properties of native cassava starch. The functional properties such as swelling, solubility, viscosity, clarity, and freeze-thaw stability were also enhanced; making it a potential substitute to commercial APS in food system since acetylated starch has very low impact on the sensory properties of food. Also, due to increase in freeze-thaw stability, cassava starches with acetylation level $\geq 2.50\%$ may serve as a good substitute for APS in frozen food industry.

REFERENCES

1. Singh J, Dartois A, Kaur L. Starch digestibility in food matrix: a review. Trends Food Sci Tech. 2010;21:168-80.
2. Raemakers K, Schreuder M, Suurs L, Furrer-Verhorst H, Vicken J-P, De Vetten N, Jacobsen E, Visser RGF. Improved cassava starch by antisense inhibition of granule-bound starch synthase I. Molecular Breeding. 2005;16:163-72.
3. Fagbemi TN, Adeoya AS, Badejo AA. Effect of sulphiting on the physical and functional properties of acetylated cassava (*Manihot esculenta*) starch. GSB Food J. 2012; 6:38-43.
4. Lunn J, Buttriss JL. Carbohydrates and dietary fibre. Nutrition Bulletin, 2007;32:21-64.
5. Fuentes-Zaragoza E, Riquelme-Navarrete MJ, Sanchez-Zapata E, Perez-Alvarez JA. Resistant starch as functional ingredient: A review. Food Res Intern. 2010; 43:931-42.

- 267 6. Sriroth K, Riyachomiwan K, Samgsee-Thong K, Oates OG. Modifications of cassava
268 starch. A paper presented at the tenth international starch convention, June 11-14,
269 Cracow, Poland, 2002.
- 270 7. Golachowski A. (2003): Properties of acetylated starch obtained from SO₂ treated
271 starch milk. Electronic J Polish Agric University of Food Sci Tech. 2003;6:1-5.
- 272 8. Lawal OS. Succinyl and acetyl starch derivatives of a hybrid maize: physicochemical
273 characteristics and retrogradation properties monitored by differential scanning
274 calorimetry. Carbohydrate Res. 2004;339:2673-82.
- 275 9. Kordylas MJ. Processing and preservation of tropical and subtropical foods.
276 Macmillan publisher, London. 1988.
- 277 10. Wurzburg OB. Chemical structure of starch in modified starches properties and
278 uses. CRC Press Inc. Boca Raton.1986.
- 279 11. Narayana K, Narasinga RMS. (1984): Effect of acetylation and succinylation on the
280 functional properties of winged bean (*Psophocarpus tetragonolobus*) flour. J Food
281 Sc. 1984;49:547-50.
- 282 12. Raja KCM, Ramakrishma SV, Mathew AG. Effect of steam hydrothermal treatment
283 (SHTT) on the physicochemical properties of cassava. J Sci Food Agric.
284 1987;39:59-71.
- 285 13. Sathe SK, Deshpande SS, Salunkhe DK. Functional properties of winged bean
286 (*Psophocarpus tetragonolobus* L.) proteins. J Food Sci. 1982;47:503-509.
- 287 14. Amani NG, Buleon A, Kamenana A, Colonna P. Variability in starch physicochemical
288 and functional properties of yam cultivated in Ivory Coast. J Sci Food Agric.
289 2004;84:2086-96.
- 290 15. Osundahunsi OF, Mueller R. Functional and dynamic rheological properties of
291 acetylated starches from two cultivars of cassava. Starch/Starke. 2011;63:3-10.
- 292 16. Craig SAS, Maningat CC, Seib PA, Hosence RC. Starch paste clarity. Cereal Chem.
293 1989;66:173-82.
- 294 17. Singh N, Kaur L. (2004): Morphological thermal, rheological and retrogradation
295 properties of potato starch fractions in granules sizes. J Sci Food Agric.
296 2004;84:1241-52.
- 297 18. Aiyeye FB, Akingbala JO, Oguntimehin GB. Chemical factors affecting acetylation
298 of cassava. Starch/Starke. 1993;45:443-45.
- 299 19. Wilkins MR, Wang P, Xu L, Niu Y, Tumbleson ME, Rausch KD. (2003): Variability in
300 starch acetylation efficiency from commercial waxy corn hybrids. Cereal Chem.
301 2003;80:68-71.
- 302 20. Ellis RP, Cochrane MP, Dale MFB, Duffus CM, Lynn A, Morrison AM, et al. (1998):
303 Starch production and industrial use. J. Sci Food Agric. 1998;77:289-311.

- 304 21. Abegunde OK, Mu T-H, Chen J-W, Deng F-M. Physicochemical characterization of
305 sweet potato starches popularly used in Chinese starch industry. Food
306 Hydrocolloids. 2013;33:169-77.
- 307 22. Singh H, Sodhi NS, Singh N. Structure and functional properties of acetylated
308 sorghum starch. International J Food Properties. 2012;15:312-25.
- 309 23. Iheagwara MC. Physicochemical and retrogradation characteristics of modified
310 sweet potato (*Ipomoea batatas* L (Lam)) starch. J Agric Food Tech. 2012; 2:49-55.
- 311 24. Agboola SO, Akingbala JO, Oguntimehin GB. Production of low substituted cassava
312 starch acetates and citrates. Starch/Starke. 1991;43:13-15.
- 313 25. Abraham TE. Stabilisation of paste viscosity of cassava starch by heat-moisture
314 treatment. Starch/Starke. 1993;45:311-15.
- 315 26. Takeiti C, Fakhouri F, Ormenese R, Steel C, Collares F. Freeze-thaw stability of gels
316 prepared from starches of non-conventional sources. Starch/Starke 2007;59:156-60.
- 317 27. Jacobson MR, Obanni M, Bemiller JN. Retrogradation of starches from different
318 botanical sources. Cereal Chem.1997;74:511-18.