

EFFECTS OF NOISE AND VIBRATION ON SUBJECTS EXPOSED TO ELECTRICAL POWER GENERATING SET POLLUTION

ABSTRACT

This research assessed the level of health effects of noise and vibration on human health from the use of local electric generating sets. This is a common practice in most of our homes and business places in developing countries. Sample of trading places in Ekwulobia, Aguata Local Government Area, Anambra State, Nigeria were considered as case studies. In this study, a sound level and a vibration meter were employed to measure the noise and vibration levels. Information on how users perceive vibration, sound and health effects accompanied by exposure to vibration and noise was obtained and analyzed with Chi-square test at 5% significant level. The results of the analysis showed a maximum value of vibration weighted root-mean-square (WRMS) of 6.14 m/s², and minimum of 0.01 m/s². The maximum value of noise was at 103.46 dB(A), the minimum at 80.72 dB(A). The maximum value of WBV and noise level was shown to be higher than the recommended value. There was also a relation between the ways the users respond to vibration and noise as well as some health effects at a p-value less than 0.05. The results showed that the use of electric powered generators in the areas studied exposed users to some health risks.

1. INTRODUCTION

Technological developments have resulted in the invention of so many equipment and machines such as generating sets, vehicles, grinding machines, drilling machines among others. These machines produce noise, vibrations and noxious air emissions while in use. In some known cases, these inventions and their wrong use are harmful to health, as they could cause certain injuries like weakness of the muscles, fatigue, discomfort, hearing

26 difficulties, among others. Electric power generating sets are designed as an alternative
27 power source in the event of power outage. Unfortunately, epileptic power supply in
28 Nigeria has turned the electric generators into the primary source of power in our homes
29 and in most commercial environments.^{[1][2]}

30 Noise exposure causes some health risks as it affects neuro-endocrine, cardiovascular,
31 respiratory digestive systems as well as disturbances. At a chronic level, noise may reduce
32 concentration, thereby reducing work-related performance ^[3]. To deal with the health
33 challenges posed by noise and vibration, it is pertinent to treat vibration as a Whole-Body-
34 Vibration (WBV) problem. This is vibration experience where the whole body is exposed by
35 contact with the feet or buttocks in a sitting position. WBV comes from various sources,
36 affects various parts of the body and manifests various symptoms, which may be felt at very
37 small levels or may become uncomfortably high, or cause some hazards, especially in some
38 off-road vehicles.^{[4] [5]}. Although noise can be productivity, it affects communication and
39 concentration. If the exposure is too high, it may cause permanent hearing impairment.^{[6][7]}
40 In most community noise surveys, vibrations are seen as a complementary to loud noise; it is
41 viewed as a major cause for annoyance. Among industrial workers regularly exposed to noise
42 and vibration, reported symptoms were anxiety, nausea, headaches, and mood swing.^{[8][9]}
43 This research is therefore aimed at determining the health effects caused by the noise and
44 vibration from generators on individuals who are regularly exposed to it.

45 2. METHODOLOGY

46 Six different research sites were selected, which are all areas with high commercial activities
47 where these electric generators are used extensively. WBV and Noise measurements were
48 carried out with strict observance of the outlined 'International Standard Organization's
49 measuring procedures, ISO 2361-1; ISO 5349-1 and Health Safety Executive, HSE'

50 respectively. The magnitude of the vibration of the generators, were measured using a
51 Vibration Meter, the sound levels were measured with a Sound Level Meter (SLM).The
52 measurements were obtained during the day (within working hours, about 1400 hours).

53 The distance between the generator position and the generator users, were obtained with a
54 meter rule. Acceleration levels were obtained on the floor which served as a vibrating
55 medium between the generator and the users. An accelerometer was connected to the
56 vibration meter (VM-6360) for the digital data recording, and finally connected to a personal
57 computer for amplification of the recorded data.

58 Key terms applied in the Vibration and Noise measurement are defined below:


59 A-weighted decibel, $dB(A)$; Weighted acceleration, a_w ; Weighted Root-mean-square of the
60 acceleration, W_{RMS} ; Crest Factor, CF (the ratio of a_w to W_{RMS}); Exposure Action Value,
61 EAV ; Exposure Action Limit Value, ELV . The ' $A(8)$ ' associated with EAV and ELV,
62 respectively, indicates an eight-hour weighting a day.

63 3. RESULTS

64 3.1 Vibration and Noise Exposures

65 The values of vibration indicating factors gathered from different locations are
66 presented in figure 3.1 and figure 3.2 respectively. Where a_w and w_{RMS} are the
67 weighted acceleration and weighted root-mean-square acceleration,
68 respectively.


69 The intervals from the source of the noise and vibration threats are of
70 importance. The values of 1m distance, is shown in figure 3.1 and subsequently
71 3.2 and 3.3 recorded an in incremental 1m difference and a reduction in the
72 acceleration values.

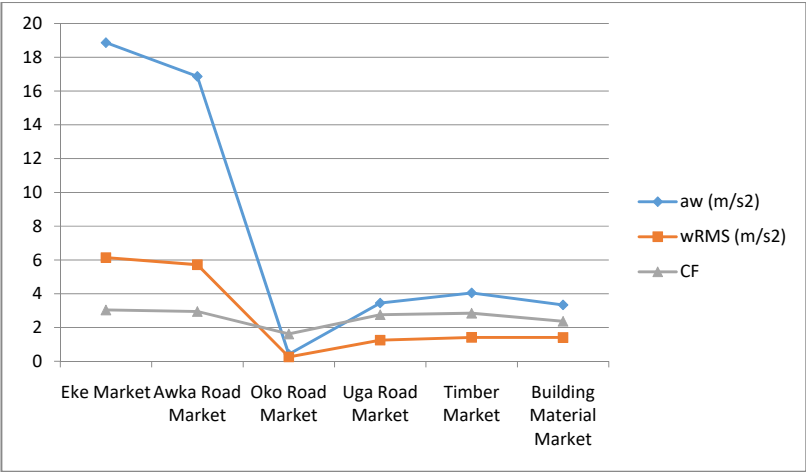

74

75 Figure 3.1: Vibration Exposure at 1 m from source

76 Figure 3.1 shows exposure level at 1m from source of vibration to the user. The
77 w_{rms} value of the vibration is at its highest in Eke market, a value of 6.14 m/s^2 .

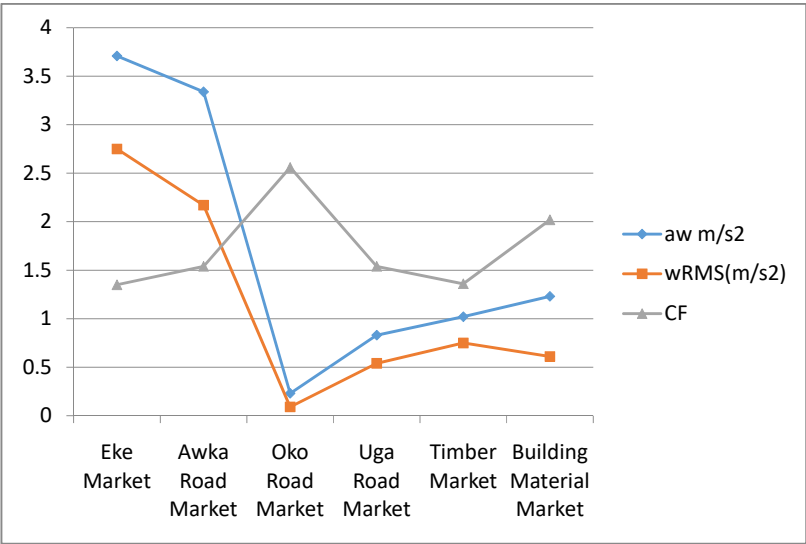

78

79 Figure 3.2: Vibration Exposure at 2 m from source

80

81 Figure 3.2 shows exposure level at 2m from source of vibration to the user. The
82 Wrms value of the vibration is at its highest in Eke market, a value of 2.75 m/s^2 .
83 Figure 3.3 shows exposure level at 3m from source vibration to the user. The
84 Wrms value of the vibration is at its highest in Eke market, a value of 0.82 m/s^2 .


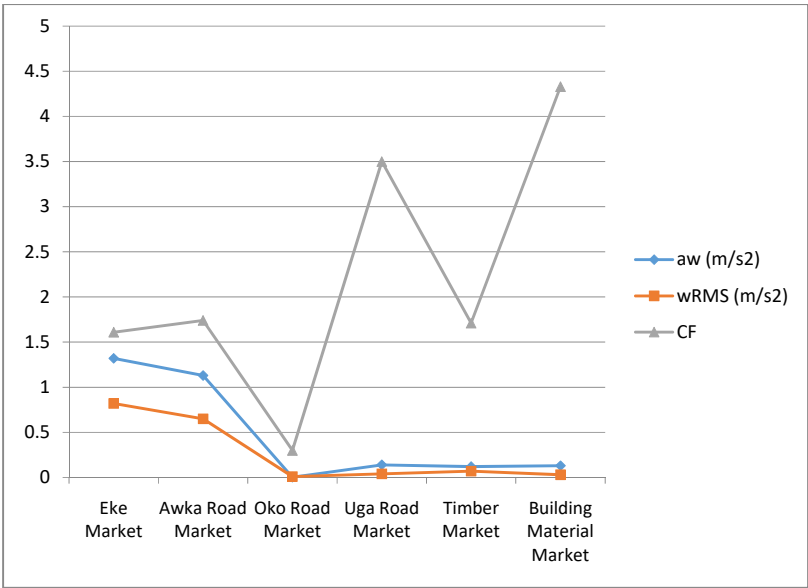


Figure 3.3: Vibration Exposure at 3 m from source


88 Figure 3.4 shows the mean noise exposure at 1m, 3m and 5m, respectively from
89 the source of the noise. The mean noise exposure is at its highest in Eke market,
90 a value of 103.46

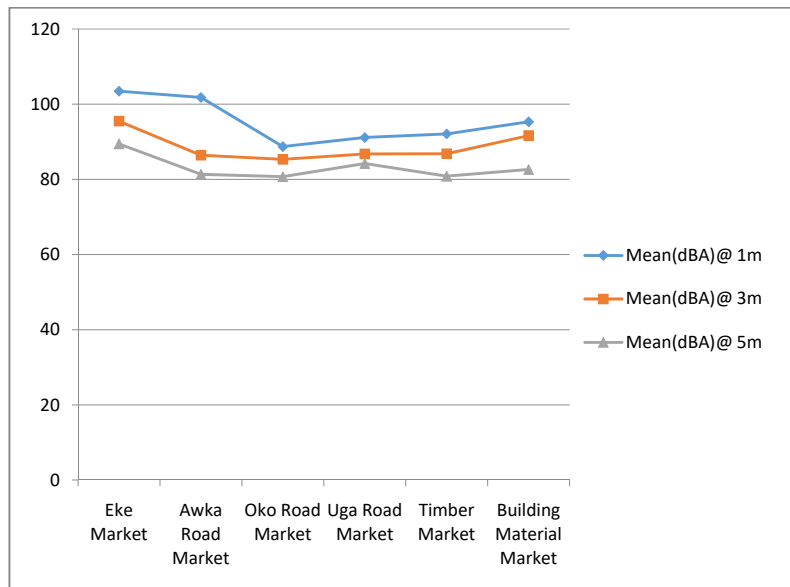

91

92 Figure 3.4: Mean Noise Exposure at 1m, 3m and 5 m respectively, from source

93

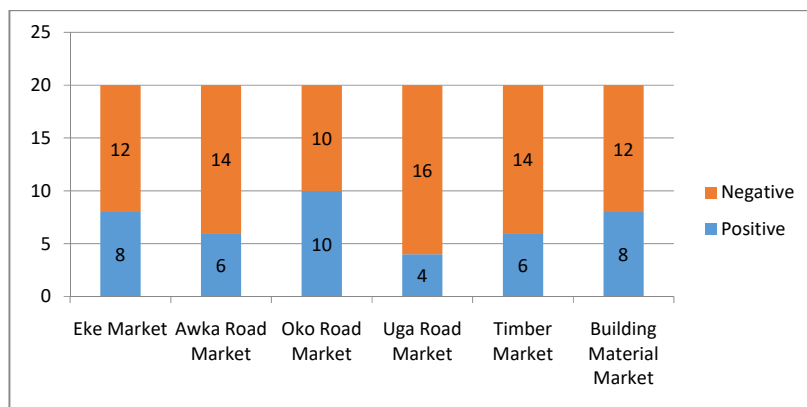


94

95 Figure 3.5: Users' perception of vibration effects

96 Figures 3.5 and 3.6 show the generator users' perception of vibration and noise
 97 effects, respectively from the test experiment.

98

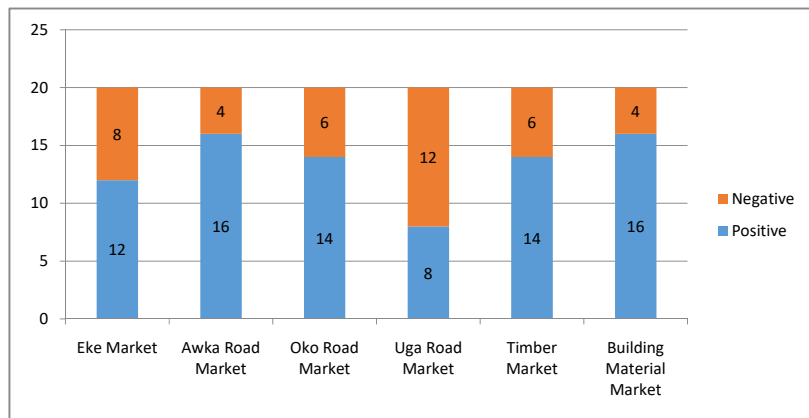

100

101 Figure 3.6: Users' perception of Noise effects

102 Table 3.10: Whole Body Vibration Effects experienced by Generator users (N = 20)

WBV Effects	Eke Market % in N	Awka Road Market% in N	Oko Road Market % in N	Uga Road Market % in N	Timber Market % in N	Building Material Market % in N	Row Total
Back pain	12(60)	8(40)	4(20)	0(0)	6(30)	2(10)	32
Fatigue	8(40)	6(30)	2(10)	8(40)	2(10)	6(30)	32
Abdominal pain	4(20)	2(10)	0(0)	6(30)	4(20)	2(10)	18
Irritability	4(20)	0(0)	0(0)	8(40)	4(20)	2(10)	18
Anxiety	6(10)	8(40)	4(20)	2(10)	0(0)	6(30)	26
Visual dysfunction	3(30)	2(10)	0(0)	4(20)	4(20)	0(0)	13
Gait difficulty	0(0)	0(0)	0(0)	0(0)	0(0)	6(30)	6
Shock	2(10)	0(0)	4(20)	4(20)	8(40)	6(30)	24
Column Total	39	26	14	32	28	30	169

103

104

105 Table 3.10 shows the Whole Body Vibration effects experienced by Generator
 106 users in the population of 120 candidates selected for the investigative test, 20
 107 samples from each of the markets. From the table, the most predominant

108 vibration effect associated with generator use is back pain and fatigue, a value
 109 of 32

110 Table 3.11: Chi-square (χ^2) Table for WBV Effects

Observed value (O)	Expected value (E)	O-E	(O-E) ²	(O-E) ² /E
12	7.38	4.62	21.3444	2.89219512
8	4.92	3.08	9.4864	1.92813008
4	2.65	1.35	1.8225	0.68773585
0	6.06	-6.06	36.7236	6.06
6	5.3	0.7	0.49	0.09245283
2	5.68	-3.68	13.5424	2.38422535
8	7.38	0.62	0.3844	0.05208672
6	4.92	1.08	1.1664	0.23707317
2	2.65	-0.65	0.4225	0.15943396
8	6.06	1.94	3.7636	0.62105611
2	5.3	-3.3	10.89	2.05471698
6	5.68	0.32	0.1024	0.01802817
4	4.15	-0.15	0.0225	0.00542169
2	2.77	-0.77	0.5929	0.21404332
0	1.49	-1.49	2.2201	1.49
6	3.41	2.59	6.7081	1.96718475
4	2.98	1.02	1.0404	0.34912752
2	3.2	-1.2	1.44	0.45
4	4.15	-0.15	0.0225	0.00542169
0	2.77	-2.77	7.6729	2.77
0	1.49	-1.49	2.2201	1.49
8	3.41	4.59	21.0681	6.17832845
4	2.98	1.02	1.0404	0.34912752
2	3.2	-1.2	1.44	0.45
6	6	0	0	0
8	4	4	16	4
4	2.15	1.85	3.4225	1.59186047
2	4.92	-2.92	8.5264	1.73300813
0	4.31	-4.31	18.5761	4.31
6	4.62	1.38	1.9044	0.41220779
3	3	0	0	0
2	2	0	0	0
0	1.08	-1.08	1.1664	1.08
4	2.46	1.54	2.3716	0.96406504
4	2.15	1.85	3.4225	1.59186047
0	2.31	-2.31	5.3361	2.31
0	1.38	-1.38	1.9044	1.38
0	0.92	-0.92	0.8464	0.92
0	0.5	-0.5	0.25	0.5
0	1.14	-1.14	1.2996	1.14
0	0.99	-0.99	0.9801	0.99
6	1.07	4.93	24.3049	22.7148598
2	5.54	-3.54	12.5316	2.26202166
0	3.69	-3.69	13.6161	3.69
4	1.99	2.01	4.0401	2.03020101
4	4.54	-0.54	0.2916	0.06422907
8	3.98	4.02	16.1604	4.06040201
6	4.26	1.74	3.0276	0.71070423
$\Sigma[(O-E)^2/E] = \chi^2 = 91.361209$ Critical value = 49.802 DOF = 35 Prob. = 0.95 p-value = 0.00000063				91.361209
Note: Expected value (E) = [Row Total * Column Total] / N				

111

112 Table 3.11 shows the summary of Chi-square table for vibration health effects
113 experienced by generator users in the population of 120 candidates tested. The
114 values are summarized below:

115 $\chi^2 = 91.361209$

116 Critical value = 49.802


117 DOF = 35

118 Prob. = 0.95

119 p- value = 0.00000063

120

121 Figure 3.7: Bar chart showing WBV effects experienced by generator users.

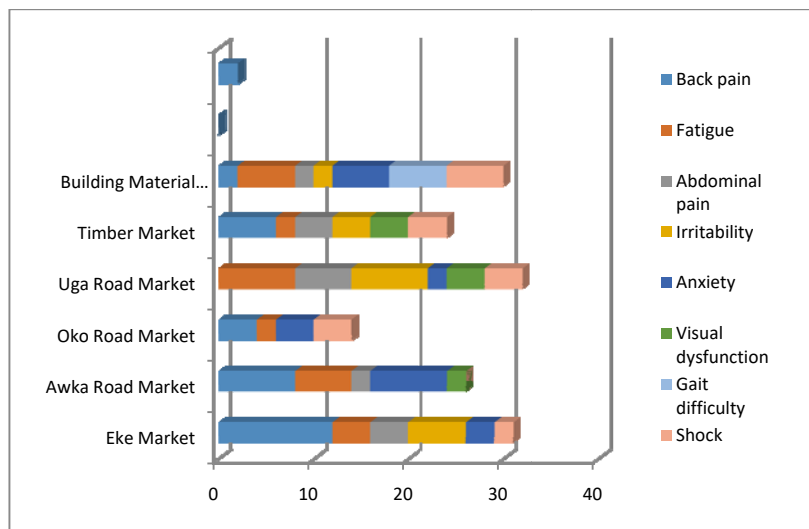

122

123 Figure 3.7: Whole Body Vibration Effects experienced by Generator users

124

125

Table 3.12 shows the noise health effects experienced by generator users in a population of sample of 120 candidates, 20 from each the markets. As observed from the table, communication interference has the highest value of 72.

Table 3.12: Noise Health Effects Experienced by Generator Users (N=20)


Noise Effects	Eke Market % in N	Awka Road Market % in N	Oko Road Market% in N	Uga Road Market% in N	Timber Market% in N	Building Material Market% in N	Row Total
Depression	6(30)	10(50)	2(10)	0(0)	4(20)	0(0)	22
Difficulty in concentration	14(70)	0(0)	10(50)	12(60)	8(40)	2(10)	46
Headache	10(50)	6(30)	8(40)	14(70)	4(20)	8(40)	50
Auditory dysfunction	6(30)	2(10)	0(0)	0(0)	4(20)	0(0)	12
Annoyance	10(50)	4(20)	6(30)	2(10)	6(30)	4(20)	32
Mood swing	14(70)	8(40)	2(10)	0(0)	4(20)	2(10)	30
Comm. Interference	16(80)	12(60)	18(90)	10(50)	4(20)	12(60)	72
Sleep disturbance	10(50)	8(40)	2(10)	0(0)	4(20)	8(40)	32
Column Total	86	50	48	38	38	36	296

Table 3.13 shows the summary of Chi-square table for noise health effects experienced by generator users in the population of 120 candidates tested. The values are summarized below:

$\chi^2 = 87.8947273$
 Critical value = 43.773
 DOF = 30
 Prob. = 0.95
 p-value = 0.00000014

152 Table 3.13: Chi-square (χ^2) Table for Noise Effects

Observed value (O)	Expected value (E)	O-E	(O-E) ²	(O-E) ² /E
6	6.33	-0.33	0.1089	0.01720379
10	3.5	6.5	42.25	12.0714286
2	3.83	-1.83	3.3489	0.87438642
0	3.17	-3.17	10.0489	3.17
4	2.83	1.17	1.3689	0.48371025
0	2.33	-2.33	5.4289	2.33
14	13.24	0.76	0.5776	0.04362538
0	7.32	-7.32	53.5824	7.32
10	8.02	1.98	3.9204	0.48882793
12	6.62	5.38	28.9444	4.37226586
8	5.92	2.08	4.3264	0.73081081
2	4.88	-2.88	8.2944	1.69967213
10	14.39	-4.39	19.2721	1.33927033
6	7.95	-1.95	3.8025	0.47830189
8	8.71	-0.71	0.5041	0.057876
14	7.2	6.8	46.24	6.42222222
4	6.44	-2.44	5.9536	0.92447205
8	5.3	2.7	7.29	1.3754717
6	3.45	2.55	6.5025	1.88478261
2	1.91	0.09	0.0081	0.00424084
0	2.09	-2.09	4.3681	2.09
0	1.73	-1.73	2.9929	1.73
4	1.55	2.45	6.0025	3.87258065
0	1.27	-1.27	1.6129	1.27
10	3.92	6.08	36.9664	9.43020408
4	5.09	-1.09	1.1881	0.23341847
6	5.58	0.42	0.1764	0.0316129
2	4.61	-2.61	6.8121	1.47767896
6	4.12	1.88	3.5344	0.85786408
4	3.39	0.61	0.3721	0.10976401
14	8.64	5.36	28.7296	3.32518519
8	4.77	3.23	10.4329	2.18719078
2	5.23	-3.23	10.4329	1.99481836
0	4.32	-4.32	18.6624	4.32
4	3.86	0.14	0.0196	0.00507772
2	3.18	-1.18	1.3924	0.43786164
16	20.73	-4.73	22.3729	1.07925229
12	11.45	0.55	0.3025	0.02641921
18	12.55	5.45	29.7025	2.36673307
10	10.36	-0.36	0.1296	0.01250965
4	9.27	-5.27	27.7729	2.99599784
12	7.64	4.36	19.0096	2.48816754
$\sum[(O-E)^2/E] = \chi^2 = 87.8947273$ Critical value = 43.773 DOF = 30 Prob. = 0.95 p-value = 0.00000014				87.8947273
Note: Expected value (E) = [Row Total * Column Total] / N				

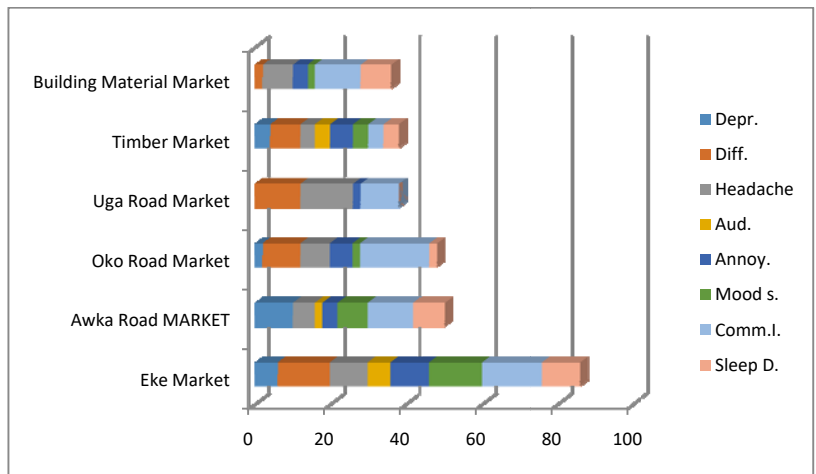

153

154 Figure 3.8: Noise Health Effects experienced by Generator users

155 Table 4: Noise Exposure at One (1) Metre from Source

Measurement Location	Minimum (dBA)	Maximum (dBA)	Mean (dBA)	Standard Deviation
Eke Market	102.20	105.40	103.46	2.10
Awka Road Market	102.70	102.80	101.80	1.42
Oko Road Market	87.10	88.40	88.73	0.73
Uga Road Market	89.40	92.10	91.15	1.46
Timber Market	90.60	93.80	92.11	0.42
Building Material Market	96.20	97.70	95.32	0.71

156

157 4. DISCUSSION

158 4.1. User's Response Analysis

159 The responses from the generator users showed that majority of the users did not know that
160 the vibration of generators affects their health (p -value < 0.05). On the contrary, some
161 generator users' responses showed that majority of them are knew the negative effects of
162 noise exposure from their generators ($p < 0.05$).

163 Many of the users believe they were exposed to generator noise hazards, and surprisingly few
164 percentage of them felt vibration from generators do not affect their health. However, this
165 study has shown that despite the high level of awareness of noise induced hearing difficulty,
166 they did nothing to protect themselves from the hazard because of ignorance of the necessary
167 precautions to take.

169 4.2. Vibration Exposure Analysis

170 It is observed from this study that generator users in Eke Market, Awka Road Market, Uga
171 Road Market, Timber Market and Building Material Market were exposed to WBV as the
172 w_{RMS} acceleration at 1m away from the generator exceeds the recommended daily exposure
173 limit value (ELV) of $1.15m/s^2$, the w_{RMS} is less than the recommended exposure action value
174 (EAV) of $0.5m/s^2$ in Oko Road Market.

175 Due to the short distance to generators, majority of the users in Eke Market showed that
176 WBV affects them; especially back pain. More so, the effects of vibration on generator users
177 depend upon so many factors: physical, biodynamic and individual factors. A similar
178 study,^[10] showed that the effects of vibration depends on the magnitude and length of
179 exposures.

180 At 2m distance away from the generator, the W_{RMS} values of WBV at Eke Market and Awka
181 Road Market are greater than the risk level of $1.15m/s^2$ which may lead to serious health
182 effects. W_{RMS} acceleration in Uga Road Market, Timber Market and Building Material
183 Markets are a little greater than the recommended EAV value, which may result to health
184 risks if the exposure is up to 3 hours at Uga Road Market, 2 hours at Timber Market and 1
185 hour at Building Material Market respectively, if caution is not taken. However, at Oko Road
186 Market clear effects are noted as the W_{RMS} is less than the recommended EAV of $0.5m/s^2$.
187 Based on these results, users at Oko Road Market will experience no health effects of WBV.

188 At 3m, W_{RMS} values in Eke Market and Awka Road Market are greater than the
189 recommended EAV of $0.5m/s^2$, which shows that there exist a tendency of WBV effects in
190 about an hour. In the case of Oko Road Market, Uga Road Market, Timber Market and
191 Building Material Market, respectively, the W_{RMS} value showed there is no possible WBV
192 effect. This proved that the possible health challenges posed by WBV to users tend to
193 decrease with distance.

194 During measurements it was also noticed that the vibration from some generating sets in the
195 markets have been reduced by mounting them on a platform with dampers. Consequently,
196 vibrations could not pass much via the floors, as it was almost impossible for the
197 accelerometer to record much vibration on the floor of such platforms. Some highly rigid
198 support structures may withstand a greater amount of ambient vibration^[11]. Hence, majority
199 of the users could not feel WBV effects. The small fraction of them who felt back pain,
200 fatigue may be due to the nature of work they do, moving goods from one place to the other.

201 4.3. Noise Exposure Analysis

202 The mean noise levels emitted from generators at 1m in Eke Market, Awka Road Market,
203 Oko Road Market, Uga Road Market, Timber Market, Building Material Market were

204 103.46, 101.80, 88.73, 91.15, 92.11 and 95.32 dB(A), respectively (see Table 4). Comparing
205 this with the 'HSE 2005 regulations of human tolerance to noise level 85 dB(A)', the results
206 showed critical public health effects and could lead to serious auditory problems like hearing
207 dysfunction. Other conditions such as annoyance may also take follow.

208 Due to the relatively short distance of respondents to the generator, majority of respondents
209 in Eke Market and Oko Road Market experience difficulty in concentration, communication
210 Interference as well as headache. Some related studies showed that high level of noise may
211 result to some sleep-related and rest difficulties, leading to mood swing, irritability, headache
212 and annoyance on part of the community members.^{[12][13]} Perhaps, this may be the reason for
213 the non-auditory cases found among generator users in this study.

214 Away from generators, a distance of 3m, it was recorded that the average noise levels at Eke
215 Market, Awka Road Market, Oko Road Market, Uga Road Market, Timber Market, Building
216 Material Market were 95.50, 86.42, 85.33, 86.78, 86.82 and 91.67 dB(A) , respectively.
217 Although there was decrease in the mean noise levels at 3m, it could still result in serious
218 auditory impairment.

219 The mean noise levels at 5m away from generators in Eke Market, Awka Road Market, Oko
220 Road Market, Uga Road Market, Timber Market, and Building Material Market were 89.45,
221 81.35, 80.72, 84.21, 80.84 and 82.63. The results showed with increase in distance away from
222 generators, noise levels appear to decrease appreciably. More so, the average noise levels at
223 Eke Market suggested some health risks, as it remained above the recommended maximum
224 noise level of 85dB(A).

225 4.4. Chi-square (χ^2) Analysis

226 The chi-square analysis showed that calculated values of Chi-Square (χ^2), [WBV = 91.36 and
227 noise = 87.895] at 0.05 significant level for 30 and 35 degrees of freedom are greater than

critical values (49.802 and 43.773, respectively) of Chi-Square (χ^2) at P-values of 0.00000063 and 0.00000014, respectively. This is so because the p-value is below 0.05 (p-value < 0.05), implying that operating generator sets affects the human health significantly in terms of WBV and Noise.

5. CONCLUSION

Noise and vibration are some of the intolerable disturbances associated with operational machines like electric powered generators. The study revealed that there is a high rate of generator use among people in the community of interest. This exposed them to vibration and noise-caused health problems. It is interesting to note that damage done to human body by the noise and vibration decreased with distance from source due to damping effect. Obviously, the study concluded that some generator users did not take cognizance of the vibration-related health issues their inappropriate use of generators had caused them; the few that were knew about it, did not know how to help themselves out. This study therefore offers the generator users a guide on the appropriate ways to use their generators in such a manner that eliminate or reduces significantly noise and vibration health issues.

Recommendations

In view of the effects of noise and vibrations, it is therefore, recommended that generator users should take precautionary measures like wearing proper hearing protection devices (such as ear muffs) to protect their ears. They should as well use rubber mats and shoes with thick rubber sole as well as recommended anti-vibration hand-gloves. Occupational health and safety management should be carried out to prevent adverse health effects in generator users. In addition health education on the hazards of generator use should be promoted in our society to improve user's awareness.

REFERENCES

- [1] Ibitoye, F. I. & Adenikinju, A., (2007), "Future Demand for Electricity Supply in Nigeria"; *Applied Energy*. 84(5), 492- 504.
- [2] Yesufu, L., Ana G., & Umar O., (2013), "Knowledge and Perception of Noise Induced Health Hazard Associated with Generator use in Selected Commercial Areas in Ibadan,

257 Nigeria”; *International Journal of Collaboration Research on Internal Medicine and Public*
 258 *Health Hazards*, 5(9), 581 – 59.

259 [3] Cuesta, M.&Pedro, C.,(2001), “Optimization of an Active Control System to reduce the
 260 Exhaust Noise radiated by a Small Generator”; *Applied Acoustics*, 62, pp. 513 – 526.a

261 [4] Griffin, M. J.(2003). “Handbook of Human Vibration”, *Second printing (ed.): Academic*
 262 *Press, London*.

263 [5] Mansfield, N. J., (2005). “Human Response to Vibration”;*CRC Press*, Boca Raton.

264 [6] Marjanen, Y., (2005). “Using ISO 2631-5 as an additional whole body vibration
 265 evaluation method with ISO 2631-1 to include also transient shocks to the analysis”;*Paper*
 266 *presented at the 12thInternational Congress on Sound and Vibration, Lisbon, Portugal*.

267 [7] Stephen A. & Mark P.,(2003). Noise Pollution: Non-Auditory Effects on Health: Oxford
 268 Journals of Medicine and Health British Medical Bulletin, 68(1), 243 – 257.

269 [8] Michael, R. & Mark, .A., (2009). “How does Background Noise affect our
 270 Concentration”? *SetonHill University, Greensburg*.

271 [9] Yesufu, A., & Ana G.,(2012). “Electric Generator Characteristics, Pattern of Use and
 272 Non Auditory Health Effects Experienced by Commercial Workers in Agbowo and Ajibode
 273 Areas of Ibadan, Nigeria”; *Review of Global Medicine and Healthcare Research*, 3(2). 159-
 274 171.

275 [10] Barbara M., Gary F. & Airdrie L.,(2009); “Bad Vibration”, *A Handbook on Whole Body*
 276 *Vibration Exposure in Mining*: Joint Coal Board, Health and Safety Trust. Sidney, Australia.

277 [11] Segerink F., Korterik J., & Offerhaus H.,(2011); “Vibration Transfers to Measure the
 278 Performance of Vibration Isolated Platforms on Site Using Background Noise Excitation”,
 279 *Review of Scientific Instruments*.

280 [12] Shivakumara, B. & Sridhar V.,(2010),“Study of Vibration and its Effect on Health of
 281 the MotorcycleRider”, *Online J Health Allied Scs.*, 9(2), 1-4.

282 [13] Essandoh, P. &Arma, F.,(2011);“Determination of Ambient Noise Levels in the Main
283 Commercial Area of Cape Coast, Ghana”,*Research Journal of Environmental and Earth*
284 *Sciences*, 3(6). 637-644.

285

286