

Study the effect of three tillage implements on potato yield and water use efficiency

ABSTRACT

The objective of this study was to ~~conduct field experiments in loamy sand soil to~~ evaluate the effect of tillage implements on potato yield and water use efficiency. The study was conducted at a private farm at Al-Kharj Governorate, Saudi Arabia during 2015 in randomized complete block design with three replications. ~~The main factor was~~ three primary tillage implements commonly used in Saudi Arabia for seedbed preparation with different configurations: disk harrow, chisel plow and moldboard plow ~~were used~~. The potato variety ~~used~~ was Spunta ~~type~~. Centre pivot system was ~~used to~~ provided irrigation water. The statistical analysis indicated that tillage implement had significant effect on yield and water use efficiency. The highest yield of 37.19 ~~ton~~/ha was observed during ~~plowing with moldboard plow~~ and the lowest (32.33 ton/ha) was observed during ~~plowing with disk harrow~~. The highest water use efficiency of 7.91 kg/m³ was observed during ~~plowing with moldboard plow~~ and the lowest (6.88 kg/m³) was observed during ~~plowing with disk harrow~~. ~~It could be concluded that~~ the obtained results could be helpful to develop comprehensive ~~technology to increase information~~ on potato yield and water use efficiency in semi-arid region like Saudi Arabia.

Keywords: Chisel plow, moldboard plow, disk harrow, tillage, potato.

1. INTRODUCTION

Potato is one of the most important food crops worldwide. It comes in the forefront of tuber-crops and occupies the fourth position after wheat, sorghum and rice ~~crops~~ in the world [1]. The crop is grown in about 140 countries, more than 100 of which are located in the tropical and subtropical zones [2], with a production potential of about 327 million tons [3].

Saudi Arabia is currently 121% self-sufficient in potatoes [4], with an area of 17665 ha [5]. Over 75% of the total potato production in Saudi Arabia comes from ~~small farmers~~ ~~grouped~~ in different regions [6]. Potato production is dependent on mechanization patterns, soil type and irrigation water quality. ~~Moreo~~However, potato variety and fertilizer are the most important factors affecting ~~potato its~~ production [7].

Tillage is defined as the mechanical manipulation of the soil for the purpose of crop production [8]. Tillage produces enough loose soil to allow ~~the~~ potato planter shoes to penetrate to the desired depth [9]. ~~In previous research papers, m~~Many reports ~~comparisons~~ have been made on tillage implements regarding the effects on soil properties and yield [10]. Ogbodo [11] reported that tillage depth had significant effect on ~~sweet potato~~ [E1] yield. Fresh tuber yields increased with soil tillage depth up to the 10cm, 20cm, 30cm and 40cm ~~soil tillage depth treated plots were 1.2t/ha to 12.9t/ha, 6.1, 6.8 and 12.9 tone/ha significantly higher than the zero till plots~~ [E2]. Chandler et al. [12] and Aina [13] reported higher yields of potato and cassava on tilled plots than the untilled plots. ~~The former~~ [E3] also observed that higher plant shoot growth was enhanced by the increased root feeding area, created by increased depth of tillage. Ghazavi et al. [14] ~~conducted field experiments to study~~ the effect of four treatments of plows, (moldboard, chisel, disk, and a new one made by Iran Plow Tools (a combination of chisel and disk plows) on potato ~~tubers~~ quantity. The results showed that ~~and found~~ significant differences ~~was observed in comparing tubers yield. quantity from moldboard plow and Iran Plow Tools' plow.~~ Mohammadi and Shamabadi [15] conducted field experiment to study the effect of tillage method on potato yield. The tillage methods were moldboard plowing + disk harrow, disk plowing + disk harrow, fall chisel plowing + disk harrow and spring chisel plowing + disk harrow. Three potato cultivars (Agria, Deraga and Sante) were tested. Depth of spring moldboard and disk plowing were 20-25 cm. Depth of spring and fall chisel plowing were 25-30 cm. Potato cultivars planted, row spacing and plants space in row were 75 and 20 cm, respectively. Results showed that

found crop yield differences among four tillage methods were significant (at 5%). Maximum of yield per hectare was using three potato varieties. -related to spring chisel plowing (31.1 ton /ha). Similar observation was made by Ati et al. [16].-conducted field experiment to study effect of tillage system on growth and yield of potato. The tillage systems included moldboard plow and chisel plow. All treatment irrigation imposed at 35% depletion of available water, all agricultural processes for crop management were used according to Ministry of Agriculture recommendation. Results showed that the yields of potato were 32.7 and 28.78 ton/ha for moldboard plow and chisel plow, respectively.

Efforts [E4] are needed from different research disciplines; agronomists, plant breeders, plant physiologists, plant biotechnologists, water engineers and others, to develop new approaches in water use in agriculture in water-limited environments [17]. However, water productivity or water use efficiency is an efficient approach to describe the efficient use of water in crop production. Water use efficiency can be increased by two ways, either by increasing yield or by saving water.

Water use efficiency is expressed as the ratio of potato yield to water supply from planting to harvest and varied typically for 11 to 9 kg/m³ [18]. Yavuz et al. [19] investigated the effects of different irrigation methods on yield and yield components of potato and water use, of methods. The methods were sprinkler, furrow and drip irrigation. The highest water use was obtained with drip irrigation plots while the lowest were obtained from sprinkler irrigation plots for both years. Mean water use efficiency was calculated as 8.32 kg/m³ in drip irrigation and 6.09 kg/m³ in sprinkler irrigation, respectively. [E5] However, in Saudi Arabia, potatoes are mainly produced on coarse textured soils and under centre pivot irrigation systems and average yields vary between 20 and 40 ton/ha [20]. [E6]

Under water-limited conditions, increasing water use efficiency is essential for successful crop production [21]. Consequently, any chosen tillage method for potato crop production in Saudi Arabia should aim at increasing water use efficiency. Therefore, the objective of this study was to evaluate the effect of different tillage implements on potato yield and water use efficiency.

2. MATERIALS AND METHODS

2.1. Experimental arrangements site, soil and water sampling and analysis

The experiment was performed in a private farm at Al-Kharj Governorate, Saudi Arabia. No crop residues were found in the experimental field. The soil texture of the experimental field was classified by laboratory analysis according to standard methods. Sand, silt and clay contents and soil texture, organic matter (O.M), calcium carbonate?(CaCO₃) percentage, soil moisture content and soil bulk density are shown in Table 1 for the soil in the experiment site.

Table 1. Soil texture, organic matter (O.M), CaCO₃ percentage, soil moisture content and soil bulk density for the soil in the experiment site.

Sand	Silt	Clay	Texture	O.M [E7]	Soil moisture content	Soil bulk density	CaCO ₃
(%)	(%)	(%)	(---)	(%)	(%,db)	(g/cm ³)	(%)
82.9	13.08	4.02	Loamy sand	0.98	7.09	1.67	6.85

Different soil and water samples were collected [E8] gathered. The soil samples were analyzed in laboratory of Soil Department, College of Food and Agriculture Sciences, King Saud University for routine analysis [E9]. Chemical elements, pH and electric conductivity (EC) of the soil in the experiment site are shown in Table 2. Irrigation water was groundwater and water samples were analyzed in the laboratory of IDAC [E10] Silliker, Riyadh, Saudi Arabia, Al-Kharj Road, Exit 9. Chemical elements, pH and electric conductivity of the used water are shown in Table 3.

Table 2. Chemical elements, pH and electric conductivity (EC) of the soil in the experiment site^[E11].

pH (---)	EC (dS/m)	Na ⁺ (ppm)	K ⁺ (ppm)	Ca ⁺⁺ (ppm)	Mg ⁺⁺ (ppm)	SO ₄ (ppm)	Cl (ppm)	NH ₃ ^[E12] (ppm)
8.5	4.6	48.66	4.91	140.59	8.76	55.06	41.72	19.61

Table 3. Chemical elements, pH and electric conductivity (EC) of irrigation water^[E13].

pH (---)	EC (dS/m)	Na ⁺ (mg/l)	TDS (mg/l)	Ca ⁺⁺ (mg/l)	Mg ⁺⁺ (mg/l)	SO ₄ (mg/l)	NH ₃ ^[E14] (mg/l)
7.57	4.81	372.07	3204.79	404.75	109.78	1237.6	8.11

2.2. Treatments and experimental design used

The field was divided into different plots. The size of the plot was 12 m × 40 m and two meters between plots. ~~were considered to separate the plots. The studied treatments were arranged in a r~~Randomized block design ~~was used~~ with three replicationes. Treatments comprised of three different types of plows as follows:

Tillage treatment 1: Plowing using a disk harrow, one pass.

Tillage treatment 2: Plowing using chisel plow, one pass.

Tillage treatment 3: Plowing using moldboard plow, one pass.

The disk harrow was trailed hitched and consisted of 24 disks (12 disks in the front and 12 disks in the back), distance ~~between among~~ two disks was 24 cm and diameter of the disk 56 cm. Plowing depth was 12 cm. The chisel plow was mounted hitched and consisted of 15 shares in two rows (8 shares in the front row and 7 in the back row), the distance ~~between among~~ two shares was 54 cm and the width of the plow was 3.377 m- ~~with a P~~plowing depth was 12 cm. The moldboard plow was mounted hitched and the width of each share was 40 cm and the width of the plow was 80 cm. Plowing depth was 25 cm. All the plows operated at one tractor forward speed of 5.4 km/h. MF399 tractor (74 kW power) was used in the field experiments. Centre pivot ~~was is~~ the main source ~~to~~ ~~supply of~~ irrigation water ~~to in~~ the experimental field.

In the beginning, a small block of approximately 10 m long by 12 m wide was used to enable the tractor and plow to reach a steady state condition of the required plowing speed and plowing depth. Plowing depth was measured as the vertical distance from the top of the undisturbed soil surface to the plow's deepest penetration. After finishing the first test plot, the tractor was again driven straight towards the second test plot with the same plow and the process was repeated. Similar procedure was repeated for all plows.

2.3. Potato planting

~~Planting etato~~ was ~~done planted~~ in autumn cycle ~~on at~~ 21st October, 2014 ~~2/10/2014~~ and harvested ~~on the~~ 14th February, 2015. ~~14/2/2015~~. Spunta variety was ~~used utilized~~ (growers No.1264, country of origin Netherland), ~~however, t~~the seeds size in mm was 35/55 ~~and was~~ treated with IMAZALIL. The planter (Type TEKYATAGANLI, Turkey) ~~was used. The characteristics of the potato planter were had~~ two rows and the distance between them ~~was~~ 90 cm ~~with 40 cups. No. of cups was 40~~. The distance between ~~cups~~ ~~oups~~ was 15 cm. Theoretical distance between seeds was 33.5 cm ~~and~~ ~~T~~the actual distance between seeds was 32 cm. ~~Diameter of Disk~~ covering ~~diameter?~~ disk was 49 cm ~~with a C~~capacity of was 0.48 m³ ~~and a M~~machine width was 1.8 m. ~~Its~~ Forward speed was 1.6 km/h. ~~The distance between rows was 90 cm. After sprouting of potato plants appeared, a tractor drawn machine for potato rows building was used. The machine consists of an array of ridges and furrows. The ridges were are~~ about 20 cm high and 75 cm apart.

2.4. Irrigation

The Centre pivot is was the main source to of supply irrigation water in the experiment site. Performance parameters for centre pivot are shown in Table (4). [E15] The centre pivot was evaluated based on the ASAE (American Society of Agricultural Engineers) standard S436.1 [22]. The centre pivot was operated at 50% speed rate to apply a reasonable average depth of water.

Table 4. Performance parameters for centre pivot.

Parameter Item	Value
Ambient temperature	13
Relative humidity	63%
Wind speed	Km/h
Type	Lockwood Crop
Age	15 years
No. of towers	7
No. of Nozzles	210
Speed at 50%	1.036
Cycle time at 50%	6 hr
Area	22 ha

2.5. Fertilizers, chemicals and harvesting

Urea was added with 350 kg/ha. Diammonium phosphate (DAP) was also added (200 kg/ha). Dissolved fertilizer (25 kg/ha) was added. In addition, potassium was added (200 kg/ha) and pesticide (2 kg/ha) was added by manual sprayer. The potato digger machine was CARTTO with two rows. [E16]

2.6. Yield

To determine potato yield, the five middle 5-plants in each plot were harvested by hand and weighed. Then tubers were separated from the plants, weighed and tuber yield was recorded in terms of tons/ha.

2.7. Statistical analysis

The yield data were statistically analysed, using a Analysis of variance (ANOVA) was performed on the data. for the randomized complete design with three replicates. The used software was [23] using ANOVA procedure.

3. RESULTS AND DISCUSSION

3.1. Field evaluation of centre pivot sprinkler irrigation system

Uniformity of a system is a measure of its ability to apply the same depth of water to every unit area. Without good uniformity, it is impossible to irrigate adequately and efficiently; parts of the field will be either over-irrigated or under-irrigated. Three [E17] uniformity measurements were are to be considered in the evaluation; Coefficient of Uniformity (CU), Distribution Uniformity (DU) and Potential Application Efficiency of Low Quarter (PELQ) and application efficiency (Ea). A CU rating of 90%-95% is considered excellent and would only require regular maintenance. 85%-90% is considered good and would not need major adjustments; regular maintenance and inspection are required. 80%-85% the system requires inspection and sprinkler package check. 80% or less the system requires an adjustment to the sprinkler package, change the default system, sprinkler pressure and conduct full maintenance for the whole system [24]. DU is useful as an indicator of the magnitude of the distribution problems. DU is calculated by dividing the weighted average of the lowest 25% of the catch cans by the weighted average of the entire catch cans. A of 85% or greater is considered excellent, 80% is considered very good, 75% is considered good, 70% is considered fair, and 65% or less is considered poor and unacceptable [25]. The evaluation parameters (CU, DU, Ea and PELQ) of the studied centre pivot are shown in Table 5. It is clear and indicates that the systems need maintenance due to lower values of the evaluation parameters.

Table 5. Evaluation parameters (distribution efficiency, of the studied centre pivot in the experiment site.

Cu	Du	Ea	PELQ ^[E18]
%	%	%	%
79.96	72.04	88.94	64.07

3.2. Yield and water use efficiency

Water was applied by centre pivot; the irrigation was conducted for about 60 days from planting prior to harvesting.^[E19] The applied water was added based on the practical experience of cultivation potato in the experiment site.^[E20] The average applied water depth was about 10.74 mm. The total applied water during season was 6444 m³/ha. Water use efficiency expressed as the ratio of potato yield to water supply from planting to harvest^[E21]. Effect of tillage implements on yield and water use efficiency are illustrated in Figs. 1 and 2 (1) and Fig. (2), respectively.

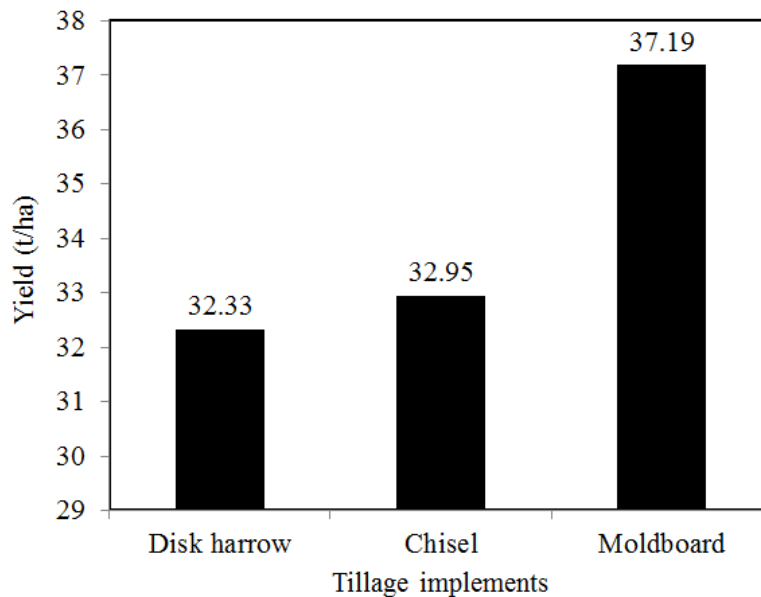


Fig. (1). Effect of tillage implements on yield.^[E22]

The ANOVA analysis (Table 6) indicated that tillage implement had significant effect (at 5%) on yield and water use efficiency. The highest yield of 37.19 ton/ha was observed during plowing operation with moldboard and lowest (32.33 ton/ha) was observed during plowing operation with disk harrow plow. The highest water use efficiency of 7.91 kg/m³ was observed during plowing operation with moldboard and lowest (6.88 kg/m³) was observed during plowing operation with disk harrow plow. Ati et al. ^[16] reported that potato yield recorded 32700 kg/ha using moldboard plow for tillage purposes compared to chisel plow. Additionally, Amel et al. ^[26] reported that average yield of the potato crop was 39121.9, 24945.7, 19504.3 and 22010.15 kg/ha based on irrigation water quality. Moreover, average water use efficiency was in the range of 10.82-11.5 kg/m³ based on irrigation water quality. It could be concluded that the obtained results could be helpful to develop comprehensive information on potato yield and water use efficiency in semi-arid region like Saudi Arabia.

Table 6. Mean square Summary of the analysis of variance for the effect of tillage implements on potato yield and water use efficiency.

Source of variation	Degree of freedom	Pr> F	
		Yield	Water use efficiency
Replicates	2	0.3263	0.3173[E23]
Tillage implements	2	<0.0001	<0.0001[E24]

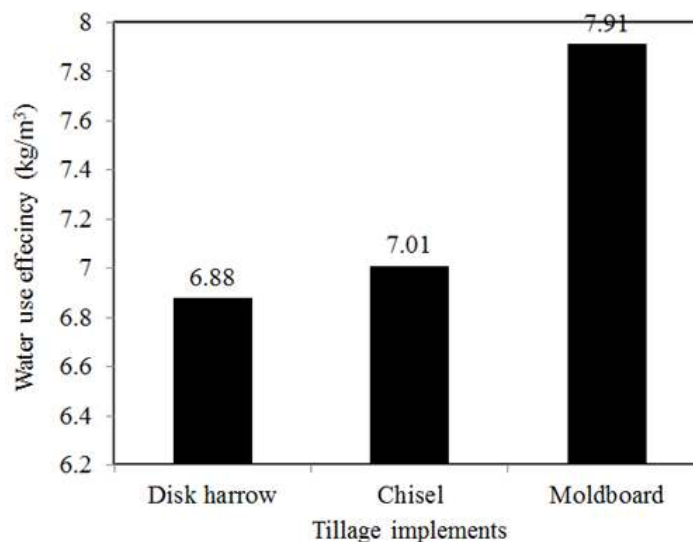


Fig. (2). Effect of tillage implements on water use efficiency.

4. CONCLUSION

Tillage implement had significant effect on potato yield and water use efficiency. The highest yield and water use efficiency were 37.19 ton/ha and 7.91 kg/m³, respectively, and obtained during were obtained from plowing with moldboard plow.

REFERENCES

1. Singh, N.P.B H., A. K. Kumer and K.M. Singh (2004). Modern technology on vegetables production. International Book Distributing Company, India.
2. Beukema, H.P. and D. E. Van der Zaag (1990). Introduction to potato production. University of Wageningen press, puodc, Wageningen, the Netherlands.
3. FAO (2006). FAO Statistics Series. Agriculture, Rome.
4. KACST (2012). King Abdulaziz City for Science and Technology. Strategic Priorities for Agricultural Technology Book, 47 p.
5. Ministry of Agriculture and Water (2010). Agriculture Statistical Year Book, Department of Economic Studies and Statistics, Ministry of Agriculture and Water, Riyadh, Saudi Arabia.
6. <http://tadco-agri.com>.
7. Abdelaziz, H.H., A.A. Emam and E.E. Taha (2010). Economics of potato production in the Northern Part of Khartoum State. Journal of Science and Technology, 11 (2):30-33.
8. Busari, M.A., S. S. Kukal, A. Kaur, R. Bhatt and A. A. Dulazi (2015). Conservation tillage impacts on soil, crop and the environment. International Soil and Water Conservation Research, 3(2):119–129.
9. Ghazavi, M.A. (2004). Potato mechanization in Iran. 4th International Crop Science Congress in Brisbane, Queensland, Australia, 26-27 September 2004.
10. Kepner, R. A., R. Bainer and E. L. Barger (1982). Principles of Farm Machinery. 4th ed. AVI Publishing Comp. INC, West Port.
11. Ogbodo, E.N. (2005). Effect of depth of tillage on soil physical conditions, growth and yield of sweet potato in an ultisol at Abakaliki, south eastern Nigeria. JASR, 5(1): 41-47.

12. Chandler, J.V., R.C. Costar and E.G. Boneta (1996). High crop produced with and without tillage on three tropical soils of the humid region of Puerto Rico. *Fac. Agric. Univ. of Puerto Rico bulletin*, 50:146-150.
13. Aina, P.O. (1976). Soil changes resulting from Long-Term Management Practices in Western Nigeria. *Soil Sci. Soc. Amer. J*, 44:827-837.
14. Ghazavi, M.A., B. Hosseinzadeh and A. Lotfalian (2010). Evaluating physical properties of potato by a combined tillage machine. *Nature and Science*, 8(11):66-70.
15. Mohammadi, A. and Z. Shamabadi (2012). Evaluation the effect of conservation tillage on potato yield and energy Efficiency. *Intl J Agri Crop Sci.*, 4 (23):1778-1785.
16. Ati, A.S., S. A. Rawdhan and S. S. Dawod (2015). Effect of tillage system on some machinery and soil physical properties, growth and yield of potato *Solanum Tuberosum L.* *IOSR Journal of Agriculture and Veterinary Science*, 8 (4):63- 65.
17. Singh, L., M. K. A. Beg, S. Akhter, S. A.qayoom, B. A. Lone, P. Singh and P. Singh (2014). Efficient techniques to increase water use efficiency under rainfed eco-systems. *Journal of Agri Search*, 1(4):193-200.
18. Ben Mechlia, N., K.Nagaz, J.Abid-Karray and M.M. Masmoudi (2007).Productivity of the potato crop under irrigation with low quality waters. In Lamaddalena N. (ed.), Shatanawi M. (ed.), Todorovic M. (ed.), Bogliotti C. (ed.), Albrizio R. (ed.). *Water use efficiency and water productivity: WASAMED project.Bari : CIHEAM, 2007 . p. 205-210 (Options Méditerranéennes : Série B. Etudes et Recherches; n . 57)*.
19. Yavuz, D. M. K. and S. Suher (2012). Comparison of different irrigation methods in terms of water use and yield in potato farming. *Journal of Selcuk University Natural and Applied Science*, 1(2):1-12.
20. Abdeldagir, A. H., M. A. Errebhi, H. M. Al Sarhan and M. Ibrahim (2003). The effect of different levels of additional potassium on yield and industrial qualities of potato (*Solanum tuber osum L.*) in an irrigated arid region. *Amer J. Potato Res.*, 80:219-222
21. Machado,S., S. Petrie, K. Rhinhart and R.T E. Ramig (2008). Tillage effects on water use and grain yield of winter wheat and green pea in rotation. *Agron. J.*, 100 (1):154–162.
22. ASAE Standards S436 (1994). Test procedure for determining the uniformity of water distribution for centre pivot, corner pivot, and moving later irrigation machines equipped with spray or sprinkler nozzles. ASAE, Joseph, MI 49085, PP. 754-755.
23. SAS (1998). Guide for personal computers. 6th edn. S.A.S. Institute Inc., Cary, NC, USA.
24. Almasraf, S., J. Jury and S. Miller (2011). Final draft field evaluation of centre pivot sprinkler irrigation systems in Michigan. Department of Biosystems and Agricultural Engineering, Michigan State University: 36 p.
25. Merriam, J. L. and J. Keller (1973). *Irrigation system evaluation and improvement"* Utah State University, Logan, Utah, 1973.
26. Amel, M. B., G. Hiba, M. D. Boutheina and B. Abdehamid (2015). Water use efficiency of potato crop irrigated under Tunisian climatic condition. *Sci. Agri.* 11 (1):38-41.