

Original Research Article

Treatment of Industrial Effluent of the Kaduna Refining and Petrochemical Company Using Rice Husk

ABSTRACT

Aim: The aim of the study was to test and assess the effectiveness of rice husk in the treatment of petroleum refinery effluents or waste water using the Kaduna Refining and Petrochemical Company (KRPC) as platform.

Place of Study: Kaduna Refining and Petrochemical Company Limited (KRPC) is located in the southern part of Kaduna State, Nigeria.

Methodology: The rice husk was obtained from a rice mill in the railway station market of Kaduna metropolis, and conditioned in accordance with standard procedures. Its characterization was carried out at the National Centre for Nanotechnology and Advanced Materials, Ondo state, Nigeria using X-Ray Fluorescence and Fourier Transform-Infra-Red. The effluent from the refinery was sampled from the designated sampling point in the wastewater treatment plant following standard procedures and then treated with rice husk.

Results: Revealed the ability of the rice husk to remove contaminants such as heavy metals, phenolic compounds, and anions from the effluent. It also reduced the effluent turbidity, total solid content, and chemical oxygen demand. The efficiency of rice husk decontamination capacity was lower than that of chemical treatment in Kaduna Refining and Petrochemical Company.

Conclusion: Rice husk can be considered a suitable material for the treatment of effluent water from refineries, which may reduce the hazard associated with these pollutants.

Key words: Rice husk, Refinery, Effluent, Pollutants, Waste water 

1.INTRODUCTION

Environmental pollution may refer to an unfavorable alteration of our surroundings (local or global) by human actions, which directly or indirectly cause changes in energy patterns, radiation levels, chemical and physical constitution of organisms [1]. Following industrial revolution which has brought with it technological progress such as discovery of fossil fuel, nuclear reactors, and chemicals, the growth of pollution has since assumed global proportions [2].Petroleum refining industries, as part of this

development, producesignificant quantities of wastewater from several processes including desalting, atmospheric and vacuum distillations, hydrocracking, catalytic cracking, catalytic reforming, as well as alkylation [3]. These effluents contain various contaminants including hydrocarbons, spent caustic soda, and cyanides. Typical petrochemical effluents have significant concentrations of suspended solids, organic matter, oil and grease, sulphide, ammonia, phenols, hydrocarbons, benzene, toluene, xylene, polycyclic aromatic hydrocarbons [4].

Environmental pollution has become a major concern in developing countries in the last few decades. Major sources of water pollution are the untreated or partially treated industrial effluents and the petroleum refining industry among others is reputed globally as a major industry which contributes to water pollution [5]. The quality of discharged water from this industry is far from the desired level of acceptance into water ways. There is also observed ignorance of the harmful effects of releasing wastewater from these processes directly into the environment (farmlands, rivers) without proper treatment. In developing countries, only about 10% of the wastewater is treated. The rest is discharged directly into water bodies. These industrial wastes contain organic and inorganic impurities apart from higher biochemical oxygen demand, chemical oxygen demand, altered pH and other parameters [6].

The conventional processes that are applied for the treatment of petrochemical wastewater can only partially remove the contaminants [7,8]. Often, the existing regulations governing the reuse and/or discharge of petrochemical effluents require the adoption of advanced treatment techniques including membrane processes. Adsorption is one of the major unit operation used for removal of various pollutants

from wastewater [9,10]. It offers flexibility in terms of selection of contacting devices and adsorbent material depending on the time, space and funds available for treatment of the wastewater. Low cost adsorbents prepared from rice husk, coconut shell, tamarind bean shells, fly ash, leaf litters, cashew nut shells, tea waste has been used effectively [11].

Nigeria is a net importer of rice with an annual local production of 3-4 million tons of paddy rice, about 20-25% of which is rice husk depending on the variety [12]. Rice husk, which is a layer protecting rice grain is the major by-product obtained from rice processing mill [13]. It consists of cellulose (32.24%), hemicelluloses (21.34%), lignin (21.44%), water (8.11%), extractives (1.82%) and mineral ash (15.05%) as well as high percentage of silica in its mineral ash, which is 94.5-96.34%. Rice husks are agricultural waste materials which have the advantage of treating the industrial effluents [14]. Several studies in different countries have been conducted on the efficiency of rice husk as an adsorbent which depends on dosage, contact time, as well as temperature [15-17]. However, no work has been done on the treatment of refinery effluent using rice husks in the area where the present study was carried out. Most researchers have targeted the use of agro-waste materials in the treatment of only one component or the other that form part of the pollutants from refinery effluent. In this light, this research targeted the use of rice husk in its natural form in the treatment of Kaduna Refinery Effluent.

2. METHODOLOGY

2.1 Study Area

66 The study area is the Kaduna Refining & Petrochemical Company Limited (KRPC). The Company is
67 located in the southern part of Kaduna. The Company is in the business of refining crude oil into high
68 quality petroleum products like premium motor spirit popularly known as petrol, automotive gas oil, lube
69 base oil; manufacturing of petrochemical products like Linear Alkyl Benzene, toluene and packaging of
70 products. The power plant and utility department of the company is responsible for treating the effluents
71 generated as a result of these processes to the statutory quality specifications discharged into Romi
72 River.

73

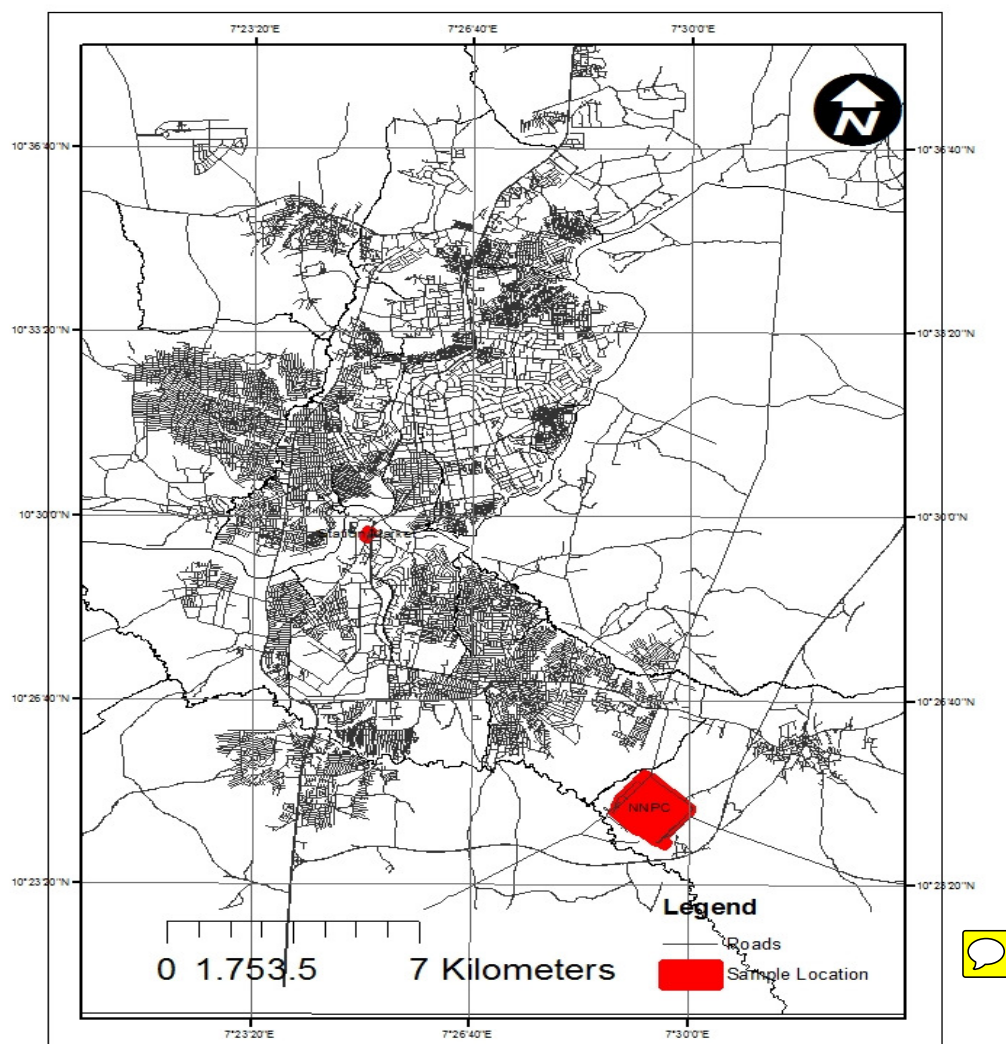


Figure 1: Map of Kaduna Metropolitan Region Showing the Study Area

2.2 Materials

Material used in preparation of the effluent treatment included; Rice husk, Kaduna Refinery effluent, distilled water, oven, beakers, jar test kit apparatus, spectrophotometer, X-ray Fluorescence (XRF),

Fourier Transform-Infra-Red (FT-IR), thermometer, oil and grease analyser, mortar and pestle, sieves, tap water, and weighing balance.

2.3 Methods

2.3.1 Rice husk conditioning

The rice husk was obtained from a rice mill at the Railway station market of Kaduna Metropolis. It was washed to remove unwanted materials first with tap water and then distilled water severally. The washed rice husk was then placed inside an oven at 65-70°C for several hours until constant weight was achieved. The dried husk was then crushed with a laboratory mortar and pestle to finer particles and sieved. The finer particles were stored in an air tight container for use in effluent water treatment. The choice of drying temperature was such that the husk should not be denatured.

2.3.2 Rice husk characterization

Portion of the processed rice husk was taken to National Centre for Nanotechnology and Advanced Materials, Akure, Ondo state, Nigeria for characterization using X-Ray Fluorescence (XRF) and Fourier Transform-Infra-Red (FT-IR). The XRF provided the elemental and oxide composition of the rice husk while the FT-IR provided the functional groups present in the rice husk.

2.3.3 Effluent characterization

The effluent water from the refinery was sampled from the designated sampling point in the wastewater treatment plant following standard procedures [18]. The sampling was done by opening the sampling point valve and allowing the line to drain off for about two seconds. This was to ensure that the sample

198 taken is the correct representation of the effluent water in the storage tank. The sampling can was then
199 rinsed with the effluent water twice before collecting the water into it. The sampled water was then
200 analysed at the Kaduna Refinery and Petrochemical Company's laboratory using Ultra Violet
201 Spectrophotometer for the anion, Smart3 Colorimeter for the Cyanide and Phenol, and Atomic Absorption
202 Spectrophotometer for the Metal determinations. This gave the detail pollutants present in the water
203 before application of the processed rice husk in its treatment.

204 **Effluent treatment**

205 A quantity (500ml) of the characterized effluent was then charged into a beaker where 5g of the processed
206 rice husk was charged and vigorously stirred for about two minutes and left to stand for half an hour while
207 stirring every 10 minutes, then allowed settling down for decantation. The decanted water was then
208 characterized to see the extent of pollutants removal from the effluent. This procedure was repeated
209 increasing the Rice Husk dosages to 10g. The test can be run co-currently with the chemicals used in
210 effluent treatment in the refinery for comparison.

211 The sample of untreated Effluent, which was collected, was carefully analysed at the Kaduna Refinery
212 and Petrochemical Company's laboratory using Ultra Violet Spectrophotometer for the anion, Smart3
213 Colorimeter for the Cyanide and Phenol, and Atomic Absorption Spectrophotometer for the Metal
214 determinations. The untreated effluent sample was treated with Rice Husk powder and analysed. 

215 Results obtained were presented as tables and charts 

3. RESULTS

3.1 Rice Husk Treated Refinery Effluent Water

The mean value of the results obtained for both the untreated and treated effluent is presented in the table below. The results of the rice husk treated effluent were compared with the results of the untreated sample and the standard values.

Table 1: Physico-chemical Properties of Rice Husk Treated Refinery Effluent Compared with the Untreated and Standard Values

S/N	TEST	STANDARD VALUES	UNTREATED	TREATED
1	pH	7.0 - 8.50	6.38	6.94
2	Temperature (°C)	36	28.2	26.4
3	Turbidity (NTU)	50	70.3	18.1
4	TS (mg/l)	NS	185	105
5	TDS (mg/l)	2000 (maximum)	130	70
6	S S (mg/l)	10 (minimum)	55	35
7	D O (mg/l)	NS	ND	
8	BOD (mg/l)	25	ND	
9	COD (mg/l)	60 (maximum)	201.7	37.17
10	Oil and grease (mg/l)	0.3	ND	ND
11	Phenolic compounds (mg/l)	0.1	1.76	1.45
12	Chloride (mg/l)	NS	48.7	32.7
13	Ammonia (mg/l)	1.0	0.7	0.3
	ANIONS			
14	Nitrates (mg/l)	NS	26.8	22.1
15	Nitrites (mg/l)	NS	13.6	13.4
16	Phosphate (mg/l)	NS	8.2	4
17	Sulphate (mg/l)	200	308	293
18	Sulphide H ₂ S (mg/l)	0.2	0.93	0.82
19	Conductivity	NS	128.4	0.3
20	Cyanide (mg/l)	0.05	0.03	0.02

	METAL			
21	Sodium (mg/l)	NS	70.0407	88.6203
22	Potassium (mg/l)	NS	15.5017	27.1561
23	Cadmium (mg/l)	0.05	0.0425	0.0345
24	Lead (mg/l)	0.05	<0.01	<0.01
25	Zinc (mg/l)	5	1.2579	0.815
26	Copper (mg/l)	0.05	0.6312	0.1726
27	Nickel (mg/l)	NS	<0.01	<0.01
28	Iron (mg/l)	0.03	2.3276	1.2206
29	Magnesium (mg/l)	NS	49.0296	55.814
30	TH (mg/l)	NS	32	28
31	CaH (mg/l)	NS	22	18
32	MgH (m)	NS	10	10
33	ALkP	NS	NIL	NIL
34	ALkM	NS	62	60

NS- not stated, TH- Thorium, CaH- Calcium Hydride, ALkP- Alkalinity P, ALkM- Alkalinity M, DO- Dissolved Oxygen, SS- Suspended solids, BOD- Biological oxygen demand, COD- Chemical oxygen demand, TDS- Total dissolved solids, TS- Total solids.

3.2 Comparative Analysis of Refinery Effluent Treatment Using Rice Husk as against the Standard and KRPC treated.

The results of the Rice Husk treated Effluent and that treated by Kaduna Refinery Petrochemical Company (KRPC) using Poly Aluminium Chloride and Poly Vinyl Pyridine are presented in the figures below. It can be seen in the figures that concentration of most of the contaminants in the Rice Husk treated effluent though within specification are higher than that treated chemically in KRPC.

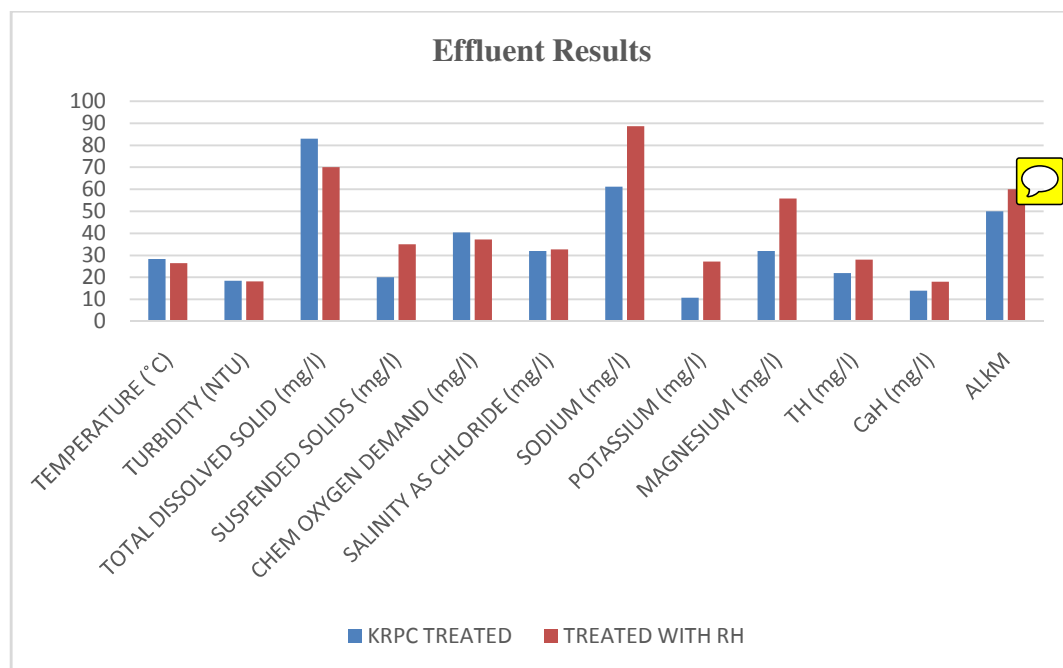


Figure 2: Temperature, Turbidity, and Concentration of Solids, Anions and Metals in KRPC and RH treated Effluents

KRPC- Kaduna Refinery Petrochemical Company, RH- Rice husk, TH- Thorium, CaH- Calcium Hydride, ALkM- Alkalinity M.

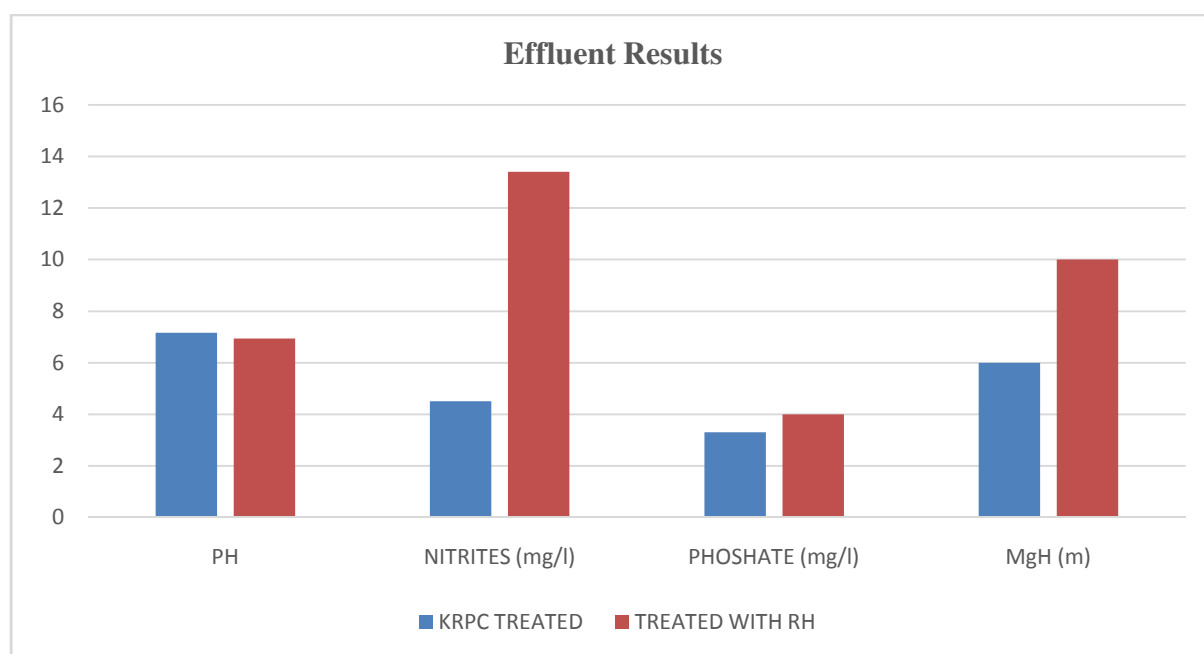


Figure 3: pH value and concentration of Anions of KRPC and RH treated Effluents

KRPC- Kaduna Refinery Petrochemical Company, RH- Rice Husk, MgH- Magnesium Hydride.

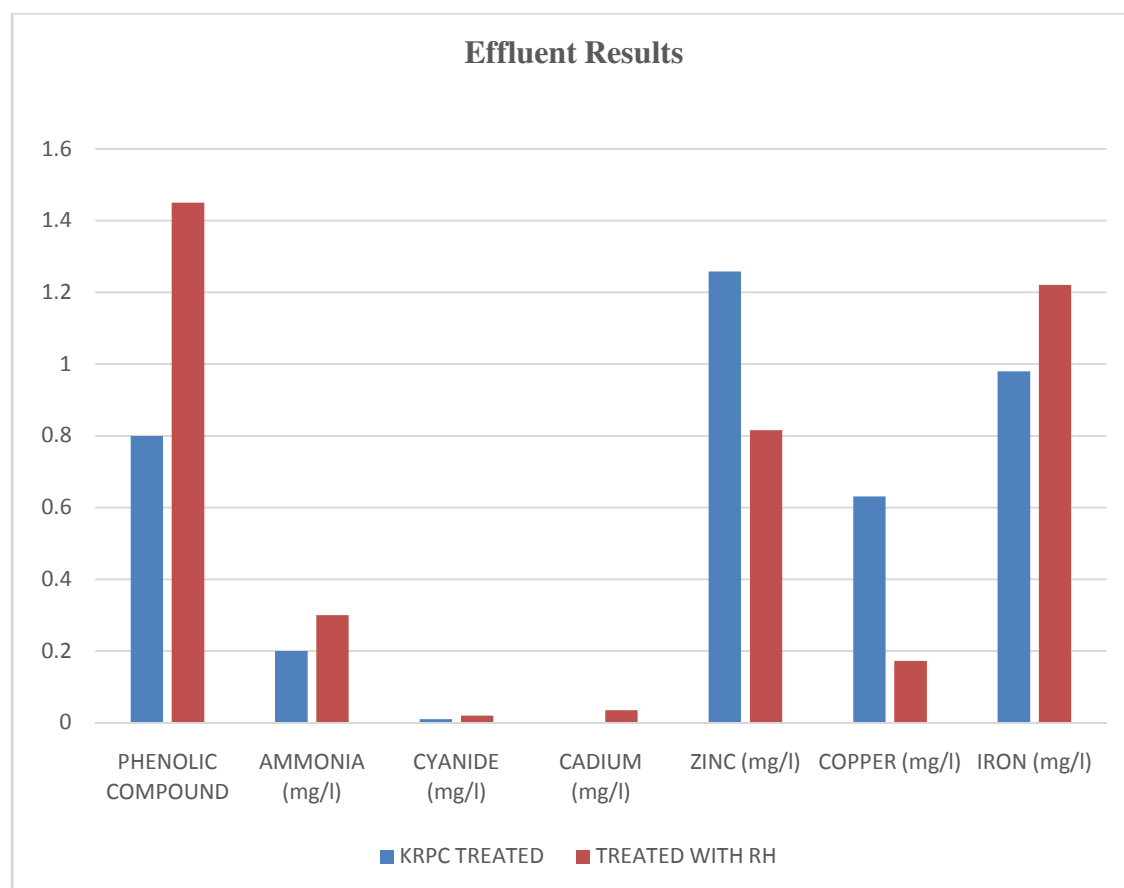


Figure 4: Concentration of Different Compounds in KRPC and RH treated Effluents

KRPC- Kaduna Refinery Petrochemical Company, RH- Rice husk

159 **3.3 XRF Characterization of Rice Husk**

160 The result of the XRF Characterization of Rice Husk is presented in table 2. It can be seen that the Rice
 161 Husk contains aluminium and potassium oxides which are key oxides responsible for coagulation in water
 162 treatment. This could be a reason why the husk gives a good effluent.

163 **Table 2: XRF Characterization of rice husk**

Element	Content (%)	Oxide	Content (%)
Mg	0.1901	MgO	0.3152
Al	0.1804	Al ₂ O ₃	0.3409
Si	0.7948	SiO ₂	1.7003
P	0.2602	P ₂ O ₅	0.5962
S	0.3307	SO ₃	0.8257
K	2.1736	K ₂ O	2.6183
Ca	0.8364	CaO	1.1703
Ti	0.4090	TiO ₂	0.6822
V	0.0152	V ₂ O ₅	0.0271
Mn	0.5184	MnO	0.6694
Co	0.0239	CoO	0.0304
Fe	4.6972	Fe ₂ O ₃	6.7158
Ni	0.1094	NiO	0.1392
Cu	0.2541	CuO	0.3181
Zn	0.3187	ZnO	0.3967
W	0.5366	WO ₃	0.6767
Rb	0.0861	Rb ₂ O	0.0942
Nb	0.0097	Nb ₂ O ₅	0.0139
Mo	0.1323	MoO ₃	0.1985
Sn	0.8052	SnO ₂	1.0223
Sb	0.7045	Sb ₂ O ₃	0.8451

164
 165

4. DISCUSSION

Several cheap materials which are usually waste products have been employed in the removal of contaminants in industrial wastes such as; agricultural waste [19,20], tea leaves and wood charcoal [21], rice hulls, bran, and husk [19,22], saw dust and mustard husk [23], cellulose [24], and many others. In this study, rice husk was used as the decontaminant. The pH of the rice husk treated and untreated effluent were acidic, though addition of rice husk improved the pH to about minimum value set (7.0 – 8.5) set by Nigerian Industrial Standards (NIS) [25]. The contaminants removal capacity of rice husk depends on pH, temperature, and composition [15,22]. Hence the increase in pH seen in this study may be the reason for the effectiveness of rice husk, as seen in some studies [15,19]. Increase in pH has been shown to increase the removal of heavy metals especially cadmium by rice husk [22]. The treated effluent revealed the following characteristics; decreased turbidity, total dissolved solids (TDS), and suspended solids (SS) (Table 1). This is in agreement with [17], whose study revealed the ability of rice husk to greatly reduce the COD, turbidity, as well as TDS and SS concentrations. The chemical oxygen demand (COD) in this study was greatly reduced when treated with rice husk. [6] Reported the effectiveness of activated rice husk in removing heavy metals and reducing oxygen demand from waste water. The decrease seen in COD from treated effluent indicates the ability of rice husk to remove organic contaminants. Reduction in COD, heavy metals and anion concentration by rice husk has also been reported by [26]. The rapid reduction in COD seen may be as a result of decreased temperature observed in the treated effluent, as its removal process may be exothermic [26,27]. The phenolic compounds are carcinogenic. In this study,

amount of phenols in treated effluent was reduced as reported by other authors. Rice husk and rice husk ash have been reported as effective adsorbent materials in removing phenol compounds from aqueous medium especially waste water [28,29].

Heavy metals detected in the effluent were sodium (Na), cadmium (Cd), lead (Pb), zinc (Zn), and copper (Cu). Rice husk treated effluent revealed a reduction in the concentrations of the measured metals. This result confirmed the ability of rice husk to remove contaminants such as heavy metals from waste water.

Using Rice Husk as refinery Effluent treatment agent will save the environment from the pollution it poses when it is burnt as the only means of disposal, make the effluent discharged into the river more environmental friendly especially the aquatic and above all save cost of effluent treatment. The rice husk in some cases is activated to make it very efficient for effluent treatment [6, 30]. A review article reported the maximum adsorbent capacity of different metals gathered from several studies conducted on rice husk especially mercury, zinc, copper, cadmium, and arsenic [31]. Other studies have also reported the heavy metals removal capacity of rice husk from waste water [6, 22]. The husk was shown not to contain dangerous materials in it as presented by the XRF result, hence adopting rice husk as effluent treatment agent will reduce the environment pollution it poses as a result of burning it. 

5. CONCLUSION

The results obtained showed that rice husk is a good effluent water treatment material as most of the parameters are further reduced compared to specifications. Rice husk can be considered a suitable

material for the treatment of effluent water from refinery (Kaduna Refinery) though it can be activated in order to achieve a better treatment. Use of rice husk may reduce amount of both agricultural waste and industrial waste, which may further reduce the hazard associated with these pollutants. Further studies can be carried out using different temperatures, pH, as well as concentrations at same or similar study areas. Activated rice husk could also be used to achieve more effectiveness.

6. REFERENCES

- [1] Azad AK, Rasul MG, Khan MM, Sharma SC, Islam R. Prospect of Moringa seed oil as a sustainable biodiesel fuel in Australia: A review. *Procedia Engineering*. 2015;105:601-6.
- [2] McDonough W, Braungart M. The next industrial revolution. *The Atlantic Monthly*. 1998;282(4).
- [3] Di Fabio S, Malamis S, Katsou E, Vecchiato G, Cecchi F, Fatone F. Optimization of membrane bioreactors for the treatment of petrochemical wastewater under transient conditions. *Chem. Eng. Trans*. 2013;32:7-12.
- [4] López-Grimau V, Guadayol JM, Griera JA, Gutiérrez MC. Determination of non-halogenated solvents in industrial wastewater using solid phase microextraction (SPME) and GC-MS. *Latin American applied research*. 2006;36(1):49-55.
- [5] Lefebvre O, Moletta R. Treatment of organic pollution in industrial saline wastewater: a literature review. *Water Res*. 2006;40(20):3671-82.
- [6] Sahu JN, Agarwal S, Meikap BC, Biswas MN. Performance of a modified multi-stage bubble column reactor for lead (II) and biological oxygen demand removal from wastewater using activated rice husk. *J Hazardous Materials*. 2009;161(1):317-24.
- [7] Kleerebezem R, Mortier J, Pol LW, Lettinga G. Anaerobic pre-treatment of petrochemical effluents: terephthalic acid wastewater. *Water Sci Technol*. 1997;36(2-3):237-48.
- [8] Kleerebezem R, Beckers J, Pol H, Look W, Lettinga G. High rate treatment of terephthalic acid production wastewater in a two-stage anaerobic bioreactor. *Biotechnol Bioengine*. 2005;91(2):169-79.
- [9] Clara M, Strenn B, Gans O, Martinez E, Kreuzinger N, Krotschek H. Removal of selected pharmaceuticals, fragrances and endocrine disrupting compounds in a membrane bioreactor and conventional wastewater treatment plants. *Water Res*. 2005;39(19):4797-807.
- [10] Martinez-Huitle CA, Ferro S. Electrochemical oxidation of organic pollutants for the wastewater treatment: direct and indirect processes. *Chem Society Rev*. 2006;35(12):1324-40.

- 232 [11] Kulkarni SJ, Kaware JP. Desorption studies for low cost adsorbents. *Int J Chem Stud*. 2015;3(2):38-
233 41.
- 234 [12] Lakshmi UR, Srivastava VC, Mall ID, Lataye DH. Rice husk ash as an effective adsorbent: Evaluation
235 of adsorptive characteristics for Indigo Carmine dye. *J Environ Managt*. 2009;90(2):710-20.
- 236 [13] Vlaev L, Petkov P, Dimitrov A, Genieva S. Cleanup of water polluted with crude oil or diesel fuel
237 using rice husks ash. *J Taiwan Inst Chem Engineers*. 2011;42(6):957-64.
- 238 [14] Foo KY, Hameed BH. Utilization of rice husk ash as novel adsorbent: a judicious recycling of the
239 colloidal agricultural waste. *Advances in colloid and interface science*. 2009;152(1):39-47.
- 240 [15] Deepika C, Dipak S, Anjani P. Heavy Metal Remediation of Wastewater by agro wastes—A Review.
241 *European Chemical Bulletin*. 2013;2(11):880-6.
- 242 [16] Farrokhi M, Ashrafi D, Roohbakhsh E, Yoonesi A. Hospital wastewater treatment by integrated fixed
243 film activated sludge, using rice husk as fixed media. *Adv Life Sci*. 2014;4(3):178-83.
- 244 [17] Zahid I, Asadullah S, Malghani N, Naeem Z, Saddam M, Siddique MA, Mushtaq F, Waqas A.
245 MUNICIPAL WASTEWATER TREATMENT USING RICE HUSK AND KIKAR CHARCOAL AS
246 ACTIVATED CARBON.
- 247 [18] Federation WE, APH Association. Standard methods for the examination of water and wastewater.
248 American Public Health Association (APHA): Washington, DC, USA. 2005.
- 249 [19] Kadirvelu K, Thamaraiselvi K, Namasivayam C. Removal of heavy metals from industrial
250 wastewaters by adsorption onto activated carbon prepared from an agricultural solid waste. *Bioresource*
251 *Technol*. 2001;76(1):63-5.
- 252 [20] Jumle R, Narwade ML, Wasnik MU. Studies in Adsorption of Some Toxic Metal Ions on Citrus
253 sinensis Skin and Coffea arabica Husk: Agricultural Byproduct. *Asian J Chemistr*. 2002;14(3):1257.
- 254 [21] Coupal B, Lalancette JM. The treatment of waste waters with peat moss. *Water Res*.
255 1976;10(12):1071-6.
- 256 [22] Ajmal M, Rao RA, Anwar S, Ahmad J, Ahmad R. Adsorption studies on rice husk: removal and
257 recovery of Cd (II) from wastewater. *Bioresource Technol*. 2003;86(2):147-9.
- 258 [23] Meena, A., & Rajagopal, C. (2003). Comparative studies on adsorptive removal of chromium from
259 contaminated water using different adsorbent 
- 260 [24] Gomez-Serrano V, Macias-Garcia A, Espinosa-Mansilla A, Valenzuela-Calahorro C. Adsorption of
261 mercury, cadmium and lead from aqueous solution on heat-treated and sulphurized activated carbon.
262 *Water Res*. 1998;32(1):1-4.
- 263 [25] Afolabi TA, Ogbunike CC, Ogunkunle OA, Bamiro FO. Comparative assessment of the potable
264 quality of water from industrial, urban and rural parts of Lagos, Nigeria. *Ife J Sci*. 2012;14(2):221-32.
- 265 [26] Mohan D, Singh KP, Singh VK. Wastewater treatment using low cost activated carbons derived from
266 agricultural byproducts—a case study. *J Hazardous Materials*. 2008;152(3):1045-53.
- 267 [27] Devi R, Dahiya RP. Chemical oxygen demand (COD) reduction in domestic wastewater by fly ash
268 and brick kiln ash. *Water, air, and soil pollution*. 2006;174(1-4):33-46.

- 269 [28] Mahvi AH, Maleki A, Eslami AK. Potential of rice husk and rice husk ash for phenol removal in
 270 aqueous system 
 271 [29] Akhtar M, Bhanger MI, Iqbal S, Hasany SM. Sorption potential of rice husk for the removal of 2, 4-
 272 dichlorophenol from aqueous solutions: Kinetic and thermodynamic investigations. J Hazardous
 273 materials. 2006;128(1):44-52.
 274 [30] Jaman H, Chakraborty D, Saha P. A study of the thermodynamics and kinetics of copper adsorption
 275 using chemically modified rice husk. CLEAN–Soil, Air, Water. 2009;37(9):704-11.
 276 [31] Chuah TG, Jumasiah A, Azni I, Katayon S, Choong ST. Rice husk as a potentially low-cost
 277 biosorbent for heavy metal and dye removal: an overview. Desalination. 2005;175(3):305-16.
 278