

Physicochemical characterization of palm mill oil effluent and bioremediation of impacted soil

Abstract

Palm oil mill effluent (POME) is a waste product from palm oil production which is known to have adverse environmental effect when disposed untreated. The aim of this study was investigate the bioremediation potentials of indigenous bacteria and fungi of POME on impacted soil. Collection of samples, physicochemical characterization of POME and soil samples, microbiological analysis of the POME and lipase assay were all carried out using standard techniques. Replicate readings were then subjected to analysis of variance (ANOVA). A total of 7x4 (28) experiments designated A to G were set up. Three experiments from each block received 100 ml, 200 ml and 300 ml of POME while the fourth had no POME. The treatments were as follows: block A (soil only), B(soil +effluent), C(soil +effluent + fungi), D(soil +effluent+ bacteria), E(soil +effluent + bacteria and fungi), F(soil +effluent + chicken droppings) and G (soil +effluent + bacteria, fungi and chicken droppings). After 14 days, water leaf (*Talinum triangulare*) were planted in all the set ups. Results of the physicochemical analysis of the POME and soil samples showed that addition of POME brought about significant ($p < 0.05$) changes in these parameters. A total of seven isolates were recovered from the effluent out of which *Bacillus* species and *Aspergillus niger* showed the highest lipase activity and were used for the bioremediation. Despite receiving about 300ml of raw effluent, set ups (F and G), showed the best growth even much better than the A that had no effluent in them. Analysis of variance of the replicate readings of the plant heights showed significance ($p < 0.05$). However, the lengths and widths of the leaves of F and G performed better than the rest. The findings suggest that palm oil mill effluent impacted soil could be reclaimed using a consortium of indigenous microorganisms and biostimulation.

Keywords: Bioremediation, *Talinum triangulare*, *Bacillus*, *Aspergillus niger*, POME, physicochemical

INTRODUCTION

The Nigeria economy is still crude oil based [1] unlike the Malaysian economy that has enjoyed a phenomenal palm oil boom that has culminated in about 41 % of the world export of palm oil. Palm oil (*Elaeis guineensis*) is a very versatile crop and nutritionally, it has been shown to contain vitamins A and E, cholesterol free and trans-free fats, saturated and unsaturated fats. In addition, it has a better shelf life than most vegetable oils. Furthermore, it is used as the basic ingredient in cooking and raw material in the cosmetic industry [2-4]. In Nigeria and particularly in Southern and Eastern Nigeria, palm oil production is largely carried out by

41 cooperative societies and individual where it plays an important role in their
42 economies [5] especially now that a litre of palm oil is even more expensive than a
43 litre of crude oil. Given these nutritional and economic benefits, palm oil production
44 has been on the increase and this has lead to high levels generated waste water
45 popularly called palm mill oil effluents (POME).

46 POME remain the largest and most significant pollutant from oil mills [5][6]. Palm oil
47 production is very water intensive. One tonne of palm oil requires five to seven times
48 more tonnes of water of which about 50 % will ends up as POME [7]. It is the
49 copious, viscous, brownish liquid waste that emanates during the production of palm
50 oil. Studies have shown that it contains about 90-96% water, soil particles, 0.6-0.7 %
51 residual oils and 4-5 % total and suspended solids. In addition, it is acidic (pH 4-5),
52 has a high temperature, nontoxic and high in organic contents (COD 50,000 mg/L
53 and BOD 25,000mg/L and 4,000-6,000 mg/L of oil and grease), and come with a
54 very unpleasant odour [8-11].

55 Palm oil mill effluent have been indiscriminately disposed in producing parts of
56 Nigeria for decades now, but it is only recently that their deleterious effects on the
57 environment has received attention [12]. It has been shown to have the ability on
58 over application on soil, to create anaerobic condition via the formation of an
59 impervious coat of organic matter on the soil surface [13]. In a more recent study,
60 POME was shown to impact negatively microbial groups such as total heterotrophic,
61 phosphate-solubilizing, nitrifying, lipolytic, cellulolytic, and palm oil degrading
62 bacteria. Furthermore, they showed that it could also impact levels of enzymes such
63 as acid phosphatase and lipase activities [14]. Elsewhere, it has been shown that it
64 can also impact the levels of nitrate, zinc, BOD and COD of nearby soils and rivers in
65 south western Nigeria and even air quality [15, 16]. Around the oil mills in Etim Ekpo,
66 untreated POME disposal has lead to loss of vegetation and biodiversity.

67 In order to cope with stringent disposal methods, it is therefore not surprising that a
68 number of POME treatments methods have been developed in Malaysia. Some of
69 them include anaerobic/facultative ponds, tank digestion and mechanical aeration,
70 tank digestion and facultative ponds, decanter and facultative ponds and physic-
71 chemical and biological treatments [7]. Interestingly, bioremediation is adjudged to
72 be the best method for the removal of POME compared to the aforementioned
73 treatment methods because bacteria, fungi and mold can elaborate useful
74 extracellular enzymes needed to utilize POME [17]. In a recent study, it was shown
75 that *Bacillus subtilis*, *Pseudomonas aeruginosa* and *Aspergillus niger* were all
76 capable of biodegrading POME with *P. aeruginosa* being the most efficient [17]. In
77 another study, it has been shown that *Candida rugosa* and *Geotrichum candidum*
78 have great potentials in the treatment of POME impacted soils. Okwute and Ijah [18]
79 using indigenous microorganisms and organic wastes such as cow dung and
80 chicken droppings achieved bioremediation of POME impacted soils.

In Malaysia, stringent regulations by regulating agencies have resulted in the treatment of generated POME before their disposal into the environment [19]. However, in Nigeria, there is no such strict regulations on POME disposal. As a result, POME generated from oil mills are usually disposed directly into the environment mainly soil and also nearby aquatic habitats without any prior treatments, despite the established environmental concerns. Given the ability of microorganisms to degrade POME, the aim of this research was to characterize POME from Etim Ekpo palm oil mill physico-chemically and microbiologically, bioremediate impacted soil, and ascertain the restoration of the treated soil samples by planting water leaf (*Tallinum triangulare*).

MATERIALS AND METHODS

Location of study

This study was carried out at the Microbiology Department, Obong University located in Etim Ekpo Local Government Area of Akwa Ibom State, Nigeria.

Palm oil mill effluent (POME) collection and preservation

Raw fresh palm oil mill effluent (POME) samples were collected from a local palm oil mill factory in Obong Ntak community using a sterile glass container and transported to the laboratory using an ice box. Some portion of the sample was immediately analysed microbiologically and physico-chemically. Samples were preserved at 4 °C to prevent microbial degradation of the POME waste water.

Soil samples collection

The pristine soil sample used in this study was collected from the University campus while impacted soils were obtained from the study oil mill. These were done as previously described [20].

Chicken droppings collection

The chicken droppings were collected fresh from a poultry house in Obong Ntak community in polythene bags and transported to the laboratory immediately. The chicken droppings were sun dried for 48hours.

Source of Water leaf and Identification

Water leaf used in this study was collected from collected from the school community.

Physicochemical characterization of the samples

This was done as described by American Public Health Association (APHA) [21]. The samples analysed for physicochemical parameters include the pristine soil sample, soil with different volumes of effluents and the effluent. The parameters examined include pH, organic carbon, total nitrogen, available phosphorus, calcium,

magnesium, sodium, aluminium, hydrogen ion, cation exchange capacity (CEC), base saturation (BS), clay, silt, sand for the impacted and pristine soil samples. For the effluent, the parameters examined were turbidity, biological oxygen demand (BOD), chemical oxygen demand (COD), dissolved oxygen (DO), electrical conductivity (EC), nitrate, phosphate and total solids.

Biochemical Characterisation and Identification of microbial isolates

The isolates were identified and characterized using methods already described [22, 25]. The probable fungal isolates were *Aspergillus niger* and *Penicillium species* while the bacterial isolates were *Bacillus species*, *Pseudomonas species*, *Corynebacterium*, *Micrococcus* and *Staphylococcus aureus*. Briefly, the soil sample from the oil mill was serially diluted and plated on nutrient agar plates which were incubated at 37°C for 24 hours. After incubation, the isolates were then purified, identified and inoculated onto Tributyrin agar in triplicates and incubated at 37°C for 48 hours. The isolates were then subjected to lipase assay to select the isolates with the highest activity.

Lipase activity

This was done as previously described but with some modifications [26, 27]. Briefly, for the lipolytic bacteria, the tributyrin agar was incorporated with Amphotericin B (to inhibit fungal growth) and for the lipolytic fungi the medium was incorporated with chloramphenicol (to inhibit bacteria growth). Holes were then bored on the solidified tributyrin agar plates. The isolates were adjusted to MacFarland standard before use. Zones of clearance were then measured and interpreted. The highest lipase activities were shown by *Bacillus species* and *Aspergillus species*.

Experimental design

A total of 28 experiments arranged in blocks of 7 containing 4 experiments each. Three experiments from each block received 100 ml, 200 ml and 300 ml, respectively while the fourth received no POME. Briefly, this was done as follows. Block A: Soil, B: Soil +Effluent, C: Soil +Effluent + fungi, D: Soil +Effluent+ bacteria, E: Soil +Effluent + bacteria and fungi, F: Soil +Effluent + chicken droppings and G: Soil +Effluent + bacteria, fungi and chicken droppings. The bacteria and fungi used were *Bacillus species* and *Aspergillus niger*.

Performance of the water leaf

Water leaves were planted on all the set up exactly 14 days after the POME was spilled into the soil samples. The performance of the water leaf in experiment was followed daily for a period of four weeks after planting. At the end of four weeks, the length and width were measured.

Statistical analysis

Replicates reading for physicochemical parameters and the heights of the water leaf were subjected to analysis of variance (ANOVA) at 95% level of significance. Probability values less than 0.05 were considered significant.

RESULTS

The results of the study are presented in the figures (1 to 5) and Tables 1 to 4. Figure 1 shows a portion of the POME collected from the palm oil mill. Figures 2 to 4 show the growth performance of water leaf at week 4, 6 and 8, respectively. Figure 5 shows the widths and lengths of the leaves at week 4. In figure 2, the set up were arranged as thus G, F, A, E, D, C and B. On other hand, figures 3 and 4 were captured from B to G. The results presented in figures 2, 3 and 4 shows that the set up G (Soil +Effluent + bacteria, fungi and chicken droppings), F (chicken dung + effluent) and A (soil: control) had the best performance compared to the rest of the set-ups. At week six, the heights of each stem was almost double that which was obtained at week 4. At week 8, the leaves started turning yellow on all the set-ups while they became really stunted on F. A total of seven (7) microorganisms were isolated and identified as *Pseudomonas sp*, *Micrococcus spp*, *Bacillus spp*, *Corynebacterium spp* and *Staphylococcus aureus*, *Aspergillus niger* and *Penicillium spp*. These isolates were subjected to lipase assay and isolates (*Bacillus* and *Aspergillus niger*) with the highest activity selected for the bioremediation.

Table 2 shows the physicochemical characterization of the POME while Table 3 shows that of the pristine soil samples and the different volumes of effluent that were used to impact the soils. From the results, it can be seen that the POME under study had very low BOD 0.13 ± 0.00 mg/L, followed by COD 0.32 ± 0.01 mg/L and DO 0.59 ± 0.01 mg/L. The pH of the POME showed that it is acidic with a value of 4.45. Nitrate levels were more than twice that of phosphate. Electrical conductivity (EC) was 594 ± 1.41 μ S/cm and turbidity gave a value of $123,800 \pm 141.42$ NTU Total dissolved solids were 36.00 ± 1.41 . Statistical analysis of the replicate readings showed significance ($p < 0.05$). The pH of the pristine soil samples was higher than those that received 100 ml and 300 ml of effluents. Organic carbon content of the soil was in between those of the effluent impacted samples. The nitrogen content of the samples was least in the unimpacted soil samples while the sample with the highest impacted volume had the highest. Furthermore similar results were seen for available phosphorus contents which gave the highest value of all the elemental composition analysed. Calcium, magnesium, potassium and sodium levels were almost similar for all the samples examined. However, aluminium and hydrogen ion (mol/kg) and electrical conductivity were higher in the unimpacted than the impacted samples. Base saturation was higher in the impacted samples. Physical properties of the samples on analysis showed that all the soil samples had more sand than clay and silt indicating a sandy-loam soil for impacted and unimpacted samples. Again, analysis gave a significant p value (0.05).

Following treatments, the growth performance of the *T. triangulare* was measured at week four and the average determined for each block (A to G) as presented in Table

4. The highest heights were attained by the treatments that received no POME in B-G. Pristine soil sample performed better than soils that received treatments except for F and G where the performance was maximum. The best performance was seen in block G, however, as the volume of effluent increased, there was a corresponding decrease in the height of the plant.

Table 1: Enumeration of Lipase producing isolates

Organisms	Sizes	Results
<i>Corynebacterium species</i>	4.5cm	++
<i>Pseudomonas species</i>	3.8cm	++
<i>Bacillus species</i>	7.8 cm	+++
<i>Staphylococcus species</i>	3.6cm	++
<i>Micrococcus</i>	2.4cm	+
<i>Aspergillus niger</i>	5.2cm	+++
<i>Penicillium</i>	4.0cm	++

KEY: 1-2.9 +; 3.0-4.9 ++; 5.0-6.9 +++; 7.0 Above ++++.

Table 2: Physicochemical parameters of effluent

Parameters	Effluent
BOD (mg/L)	0.13±0.00 ^a
COD (mg/L)	0.32±0.01
DO (mg/L)	0.59±0.01
Ph	4.45.00
EC (µs/cm)	594.00±1.41
Turbidity (NTU)	123,800.00±141.42
Nitrates (mg/L)	169.00±1.41
Phosphate (mg/L)	69.12±0.01
Total solids (mg/L)	36.00±1.41

^aRepresents significant Mean±SD values that are significant (p < 0.05).

Key: BOD – Biochemical Oxygen Demand, COD –Chemical Oxygen Demand, DO –Dissolved Oxygen ,EC – Electrical conductivity

Table 3: Physicochemical analysis of soil samples

Parameters	OS	OS+300ml Effluent	OS+100ml Effluent
pH	5.60 ^a	5.20 ^a	5.00 ^a
Organic carbon (%)	0.74	0.69	0.88
Total nitrogen (%)	0.01	0.05	0.04
Available	32.12	42.00	34.37

phosphorus (mg/kg)			
Calcium (mol/kg)	2.00	1.80	2.00
Magnesium (mol/kg)	1.00	1.20	0.80
Potassium (mol/kg)	0.12	0.11	0.09
Sodium (mol/kg)	0.08	0.08	0.07
Aluminium (mol/kg)	0.36	0.26	0.24
Hydrogen ion (mol/kg)	2.04	1.16	1.20
CEC (mol/kg)	5.60	4.61	4.40
BS (%)	57.00	69.00	67.00
Clay (%)	8.00	4.00	4.00
Silt(%)	5.70	8.70	10.70
Sand(%)	86.30	87.30	85.30

^aRepresents replicate readings that are significant ($p < 0.05$) across the rows at 0.05 level of significance. OS = Ordinary soil. CEC= Cationic exchange capacity and BS= Base saturation.

Table 4: Mean Height of *T. triangulare* with different treatments (cm) of POME

Treatments	Control (o ml)	100 ml	200 ml	300 ml
Soil (A)	7.96±1.29	8.60±0.96	8.10±3.75	8.10±1.67 ^b
Soil + Effluent (B)	8.32±2.81	7.00±3.34	7.52±1.53	7.02±0.13 ^a
SE + fungi (C)	7.88±0.63	6.86±0.42	5.72±1.17	3.44±1.64 ^a
SE + bacteria (D)	7.18±0.75	7.18±0.25	6.70±0.76	4.75±1.48 ^c
SE+fungi+bacteria (E)	12.96±2.82	8.48±1.26	7.20±0.57	6.60±0.65 ^c
SE+chicken dung (F)	22.20±5.95	18.00±1.27	15.20±2.11	12.66±1.98 ^c
SE+chickendung+fungi+bacteria (G)	25.80±6.18	19.72±1.75	16.70±1.48	14.20±2.19 ^c

^a and ^b Represents significant ($p < 0.05$) measurements across the row and columns while c represents none significant measurements ($p > 0.05$). Note: Key: fungi =

239

240

241

242 *Aspergillus niger* and bacteria = *Bacillus species* and SE = soil + effluent.



Figure 1: A portion of the collected POME



Figure 2: Growth of Water leaf at 4weeks



Figure 3: Growth of Water leaf at 6weeks



Figure 4: Growth of Water leaf at 8 weeks

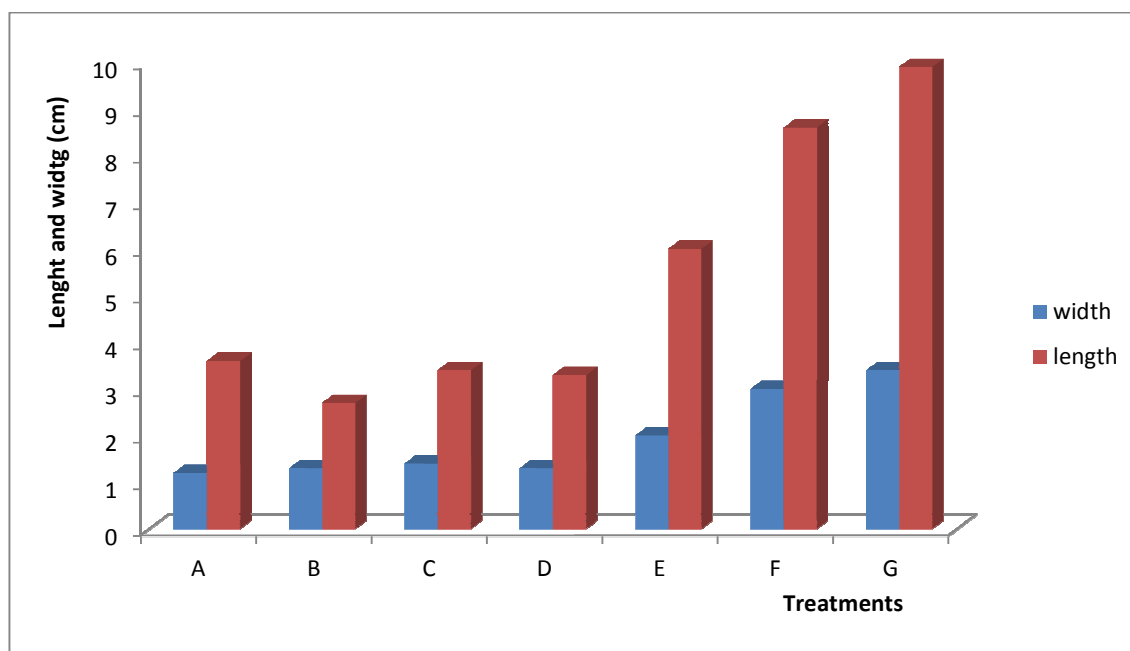


Figure 5: length and width of *T. triangulare* leaves across different treatments at week 4.

DISCUSSION

In Nigeria there are more studies on bioremediation of crude oil polluted soils than on the bioremediation of the soils polluted with palm oil mill effluent even as the price of palm oil is presently higher than that of petrol in the country. Studies have shown that physicochemical properties of POME and even soil vary from location to location [28, 29].

The results of this study indicates that palm oil effluent is more acidic in pH, than the pristine soil sample examined and also lower than the 5.11 reported previously for unimpacted soil in Calabar [28]. Furthermore, in their study, they found sand, silt and clay in the proportions of 78.40, 4.43 and 17.30%, respectively and these were different to our findings of 86.30, 8.00 and 5.70%. However, both soils can be classified as sandy-loam soil because they contain at least 75% sand and thus can support the growth of palm trees [28].

On addition of the POME, the physicochemical properties of the receiving soils such as pH, organic carbon, nitrogen, phosphorus, metals, soil properties, BS and CEC changed. This agrees with an earlier study that showed that the soil contaminated with POME changed physicochemical parameters such as pH, oil and grease and even elements [29]. Eze *et al* [29] reported a DO of 1.8, nitrate 0.55, phosphate 0.21, BOD 25.00, COD 60.00 and TDS 0.35 mg/L, and turbidity of 55.00 NTU and pH 7.20. When compared to our study POME, the DO, BOD, COD and pH, were lower while the levels of TDS, nitrate, phosphate and turbidity in our study were higher.

The study POME physico chemical parameters, however, fall within the regulatory standard of the Federal Ministry of Environment [30].

Loretta *et al* [17] showed that *Pseudomonas aeruginosa* can more efficiently degrade POME using it as a carbon source for growth better than *Aspergillus niger* and *Bacillus species*. Interestingly, our study isolates showed a much better synergistic effect when biostimulated with chicken droppings as a source of limiting nutrients.

Eze *et al* [29] isolated a total of 13 bacteria and fungi including *Bacillus* species, *Pseudomonas aeruginosa*, *S. aureus*, *Aspergillus*, *Penicillium* species, and *Micrococcus*, which were also isolated in our study with *Bacillus* and *Aspergillus* being amongst the most frequent in occurrence. Ibegbulam-Njoku and Achi [31] showed that indigenous fungi *Geotrichum candidum* and *Candida rogusa* have the ability to reduce pollution effects of POME. In another study, it was shown that indigenous microbial isolates from POME have the potential to degrade organic components and also mixed cultures were even more effective in the reduction of COD and BOD of POME [32]. This assertion of Bala *et al* [32] is evident in the better growth performance shown by the experiments F and G. Despite receiving about 300 ml of raw effluent (F and G), the test vegetable grew much better than the controls that had no effluent in them. Also the presence of limiting nutrients from the chicken droppings [33] explains in part the better performance of the study plant as seen in experiments F and G. When compared to other impacted soil samples that had single isolated bacterium, E performed much better than D, C, and B especially at lower volumes of effluents.

CONCLUSION

The presence study has shown that POME has the ability to alter the physicochemical properties of the receiving soil samples. Furthermore, indigenous isolates present in POME have varying ability to degrade palm mill oil effluent when used singly, mixed and biostimulated with limiting nutrients from organic waste.

REFERENCES

- [1] Onyemaechi JO. Economic Implications of Petroleum Policies in Nigeria: An Overview. American International Journal of Contemporary Research.2012; 2: 60-71.
- [2] Mancini A, Imperlini E, Nigro E, Montagnese C, Daniele A, Orru S, Buono P. Biological and Nutritional Properties of Palm Oil and Palmitic Acid: Effects on Health. Molecules. 2015; 20:17339-17361.
- [3] May CY, Nesaretnam K. Research advancements in palm oil nutrition. European Journal of Lipid Science and Technology. 2014; 116:1301-1315.

- 309 [4] Shimizu H. The health, environmental and economic benefits of palm oil.
310 Institut Economique Molinari Economic Notes. 2012:1-4.
311
- 312 [5] Ibegbulam-Njoku PN. Achi OK. Biodegradation of Palm Oil Mill Effluent.
313 British Microbiology Research Journal. 2014; 4(12):1440-1450.
314
- 315 [6] Poh PE, Chong MF. Development of anaerobic digestion methods for
316 palm oil mill effluent (POME) treatment, Bioresource Technology.2009; 100:1-
317 9
318
- 319 [7] Bala JD, Lalung J, Ismail N. Biodegradation of palm mill effluent (POME) by
320 bacterial. International Journal of Scientific Research Publications.201 4; (3):
321 1-10.
322
- 323 [8] Zakaria ZZ, Hazon K, Mwide AA. Current status on land application of
324 palm oil mill effluent in the oil palm industry. A review palm oil research
325 institute, Malaysia. 2002; 42:1–19.
326
- 327 [9] Ahmad A, Ismail S, Bhatia S. Water Recycling from Palm Oil Mill Effluent
328 (POME) Using Membrane Technology. Desalination. 2003;157: 87-95.
329
- 330 [10] Ahmad AL, Sumathi S, Hameed BH. Residual oil and suspended solid
331 removal using natural adsorbents chitosan, bentonite and activated carbon: A
332 comparative study. Chemical Engineering Journal. 2005; 108:179–185.
333
- 334 [11] Poh PE, Chong MF. Development of anaerobic digestion methods for palm oil
335 mill effluent (POME) treatment. Biosour. Technol. 2008;1-9.
336
- 337 [12] Igwe JC, Onyebado CC. A Review of Palm Oil Mill Effluent (POME). Water
338 Treatment. Global Journal of Environmental Research. 2007; 1(2):54-62.
339
- 340 [13] Keu ST. Review of previous similar studies on the environmental impacts of
341 oil palm plantation cultivation on people, soil, water and forest ecosystems. MSC
342 thesis Faculty of horticulture, Chiba University. 2013; 1-12.
343
- 344 [14] Ibe IJ, Ogbulie JN, Orji PI, Ihejirika C, Okechi RN. Effects of Palm Oil Mill
345 effluent (Pome) on soil bacteria and enzymes at different seasons.
346 International Journal of Current Microbiology and Applied Sciences. 2014; 3 (10):
347 928-934.
348
- 349 [15] Awotoye OO, Dada AC, Arawomo GAO. Impact of Palm Oil Processing
350 Effluent Discharge on the Quality of Receiving Soil and River in South Western
351 Nigeria. Journal of Applied Sciences Research. 2011; 7(2): 111-118, 2011
352
- 353 [16] Ohimain EI, Izah SC, Abah SO. Air quality impacts of smallholder oil palm
354 processing in Nigeria. Journal of Environmental Protection. 2013; 4: 83- 98.
355
- 356 17] Loretta OO, Stephen E, Ezeata A, Usman E (2016) *In Vitro* Biodegradation of
357 Palm Oil Mill Effluent (POME) by *Bacillus subtilis*, *Pseudomonas aeruginosa*
358 and *Aspergillus niger*. J Bioremediat Biodegrad. 2016; 7: 361.

- [18] Okwute OI, Ijah UJJ. Bioremediation of palm oil mill effluent (pome) polluted soil using microorganisms found in organic wastes. *International Journal of Biotechnology*. 2014; 3(3):32-46.
- [19] Najafpour GD, Zinatizadeh AAL, Mohamed AR, Hasnain-Isa M, Nasrollahzadeh H. High-rate anaerobic digestion of palm oil mill effluent in an upflow anaerobic sludge-fixed film bioreactor. *Process Biochemistry*. 2006; 41:370–379.
- [20] Stanley HO, Amakiri MA, Okerentugba PO. Characterization Of Hydrocarbon Utilizing Bacteria In Soil Samples Collected From Various Sites In Port Harcourt (Niger-Delta, Nigeria). *Global Journal of Bioscience and Biotechnology*. 2015; 4(1):6-11.
- [21] APHA. Standard Methods for the Examination of Water and Waste Water. 20th Edition. APHA-AWWA-WPCF. Washington DC;1998.
- [22] Barnett HL, Hunter BB. Illustrated genera of imperfecti fungi, (3rd edition.) Burgess Publishing Company, Minnesota, U.S.A; 1972.
- [23] Collins CH, Lyne PM. Microbiological methods 4th Edition. Butterworth and Co. Publ. Ltd. London; 1979: 331-345.
- [24] Collins CH, Lyne PM, Grange GM. Collins and Lyne Microbiological Methods, 6th Edition. Butterworth, London;1989.
- [25] Pepper IL, Gerba CP. Environmental Microbiology. A laboratory manual. Second edition Elsevier academic press;2004.
- [26] Chan KS, Chooi CF. Ponding system for palm oil mill effluent treatment. In: Proceedings of Regional Workshop on Palm Oil Mill Technology and Effluent Treatment. PORIM, Malaysia; 1982:185–192.
- [27] Ibegbulam-Njoku PN, Achi OK, Chijioke-Osuji CC. Use of Palm Oil Mill Effluent as Fermentative Medium by Lipase Producing Bacteria. *International Journal of Scientific & Engineering Research*. 2014; 5 (2): 1631-1640.
- [28] Iwara AI, Ekukinam EU, Musa, WA, Ewa EE. Soil Physicochemical Properties and their Influence on the Distribution of Roadside Tree/Shrub Species in Southern Nigeria. *Open Science Journal of Bioscience and Bioengineering*. 2014; 1(1):13-18.
- [29] Eze VC, Owunna ND, Avoaja DA. Microbiological and Physicochemical Characteristics of Soil Receiving Palm Oil Mill Effluent in Umuahia, Abia State, Nigeria. *Journal of natural Science Research*. 2013; 3(7): 163-170.
- [30] Federal Environmental Protection Agency (FEPA). Guidelines and standards for environmental pollution control in Nigeria. Federal Environmental Protection Agency. Lagos-Nigeria; 1991

- 408
409 [31] Ibegbulam-Njoku PN. Achi OK. Use of fungi in bioremediation of palm oil mill
410 effluent (POME). International Journal of Advancements in Research &
411 Technology. 2014; 3(5) :1-8.
412
413 [32] Bala JD, Lalung J, Ismail N. Studies on the reduction of organic load from
414 palm oil mill effluent (POME) by bacterial strains. International Journal Recycling
415 Organic Waste Agriculture. 2015; 4:1–10.
416
417 [33] Olayinka A. Nitrogen and phosphorus uptake by maize (*Zea mays L.*) as
418 affected by depth of animal manure incorporation. Samaru Journal of
419 Agricultural Research. 1997:1359-66.