

**FLOOD RISK ASSESMENT OF ZARIA METROPOLIS AND
ENVIRONS: A GIS APPROACH**

Abstract

Delineation of flood prone areas within Zaria and environs was carried out. Spatial data such as elevation, slope, wetness and drainage distances was used to delineate flood prone areas. These data were reclassified and weighted using Analytical hierarchy procedue-multi criteria evaluation method. The resulting flood risk map reveals the central and north eastern part of the study area as highest flood risk zones, while the southwestern part of the study area as the lowest flood risk factor. Areas delineated as having very low flood risk account for 28.3% of the study area and covers some 86.88km². Areas delineated as having low flood risk accounted for 29.5 % of the study area and covers 90.56km². Areas depicted as having high flood risk accounted for about 32.1% covering some 98.545km². Areas depicted as having very high flood risk accounted for 10% of the study area and covers an area extent of 31.007 km². Future infrastructural development must be guided by technical reports forecasting high risk, flood prone areas.

Keywords: Zaria, floods, spatial model, risk, development


Introduction:

The world have experienced an increasing impact of disaster in the past decade. Many regions are exposed to natural hazards with unique characteristics. In Tropical Africa, one of the most common hazard is flooding, due to the severe impact of climate change. Flooding represents a severe human hazard (Marriott and Alexandar 1999). And are among the most recurring and devastating natural hazards impacting human lives and causing severe damage throughout the world (Khan *etal.*, 2011). Majority of floods are harmful to human settlements and yearly flooding on average victimize 20,000 lives and affect 75 million people (Coburn 1994). It is understood that flood risk will not subside in the future and with the onset of climate change, flood intensity and frequency will threaten many regions of the world (Jonkman and Dawson 2012). The Intense rainfall is the key factor influence on floods,

30 however, some other factors like geomorphological features, siltation, and land use pattern
31 contribute to create floods. Flood impact is more pronounce in lowlying areas due to rapid
32 growth in population, poor governance, decaying infrastructure and lack of proper planning
33 and management (Odufuwa*et al.*, 2012). For years, flood management studies have been
34 expensive and unwieldy, with much of the analysis performed by hand using papers.
35 Recently, the advancement in computer aided technology has been extensively used in
36 formulating models used for flood calculation and hazard analysis (Duan*et al.*, 2009). Use of
37 GIS, GPS and Remote Sensing are helping flood managers to create accurate flood hazard
38 maps with improved efficiency and speed at reasonable cost. The main advantage of using
39 GIS for flood analysis is that it does not only generate visualization for flooding but also
40 creates a potential to further analyze these events to estimate the probable damage due to
41 flood (Ouma and Tateishi 2014). Flooding in most Nigerian cities is a major environmental
42 challenge that has continued to defy solution as more people are rendered vulnerable to
43 hazards involved (Odufuwa*et al.*, 2012). In 2012, Nigeria experienced an unprecedented
44 flood that affected about twenty seven states, killed three thousand people and displaced
45 about two million from their home. Though Zaria was not affected that much Zaria have
46 often experienced small scale flooding. The probability of Zaria experiencing large scale
47 flood is high due to the low lying nature of the terrain, present of large river and changing
48 weather patterns due to climate change. Because of this threat cause by flooding it is
49 necessary to identify potential areas likely to be affected by floods. Identification of such
50 areas will aid in proper decision thus enabling government authorities to reduce the effect of
51 flood in this strategic Nigerian city.

52 **Location:**

53 The study area is located on the Crystalline Province of Northern Nigeria, within the Guinea
 54 Savannah belt. It is located on the Federal Surveys 1:50,000 Series Topographical Sheet 102
 55 Zaria SW, between Latitudes 11° 02'N to 11°10'N and Longitudes 7° 38'E to 7°50'E (Fig. 1).

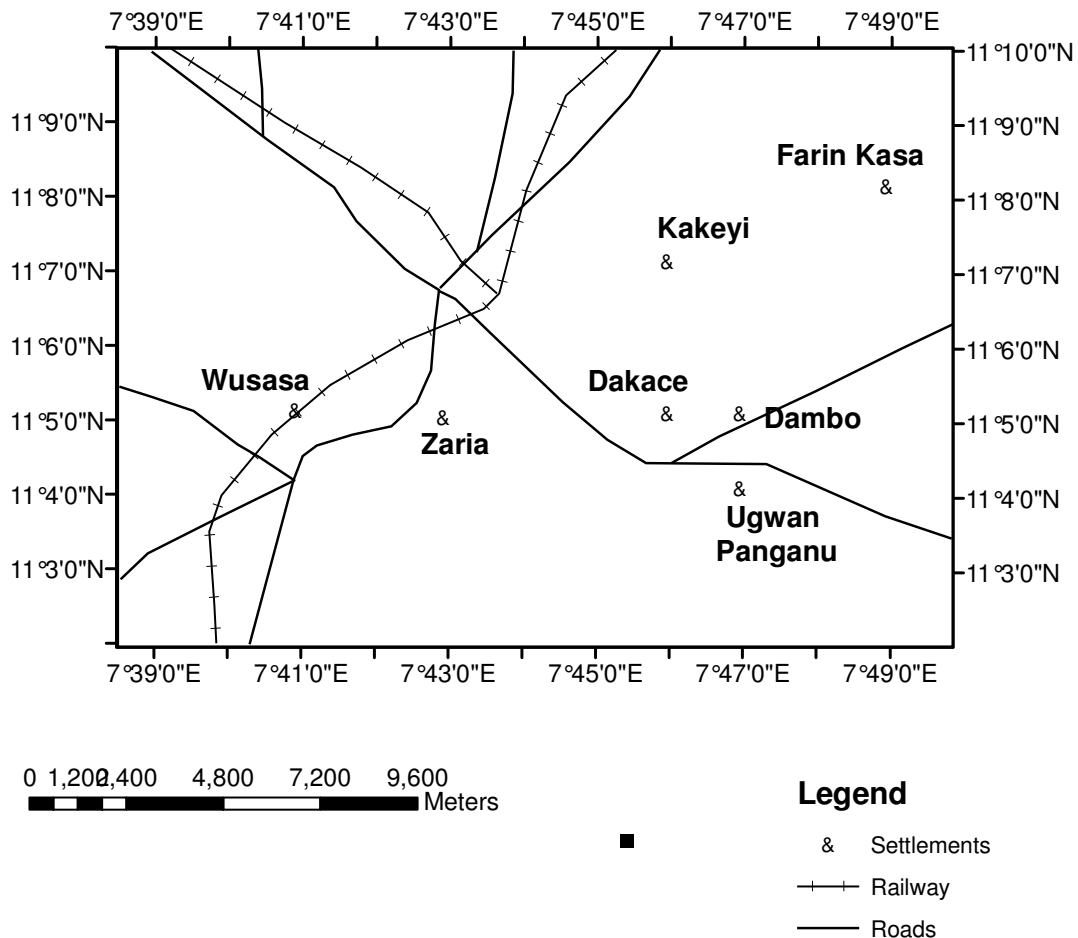


56
 57 **Figure 1: The Location Map of the study area**
 58 The topography of the area is generally low. Accessibility to the study area is possible
 59 through major road linking Zaria to Kano in the Northwest. Minor roads links most towns
 60 and villages. Accessibility within the study area is also possible through numerous footpaths.

61

62 **Methods:**

63 The methodology for delineating flood prone areas with Zaria and environ is presented on
 64 Fig.2. Method involves weighting and integration of different thematic layers relating to

65 flooding using predictive modelling GIS. In this study flood risk map was generated with the
66 aid of spatial data such as Shuttle radar topographic mission Digital elevation model (SRTM
67 DEM) and satellite imageries (Landsat ETM). Digital elevation model was downloaded from
68 website of university of Maryland Global Land cover facility website. Elevation, slope and
69 drainage data were extracted from downloaded digital elevation model. Satellite images
70 (Landsat ETM) was downloaded from Website of University of Maryland Global Land cover
71 facility website. Wetness information was extracted using Envi software by running the
72 tasseled cap algorithm. Multi criteria evaluation was used to assigned weight to
73 different thematic classes within each spatial data.

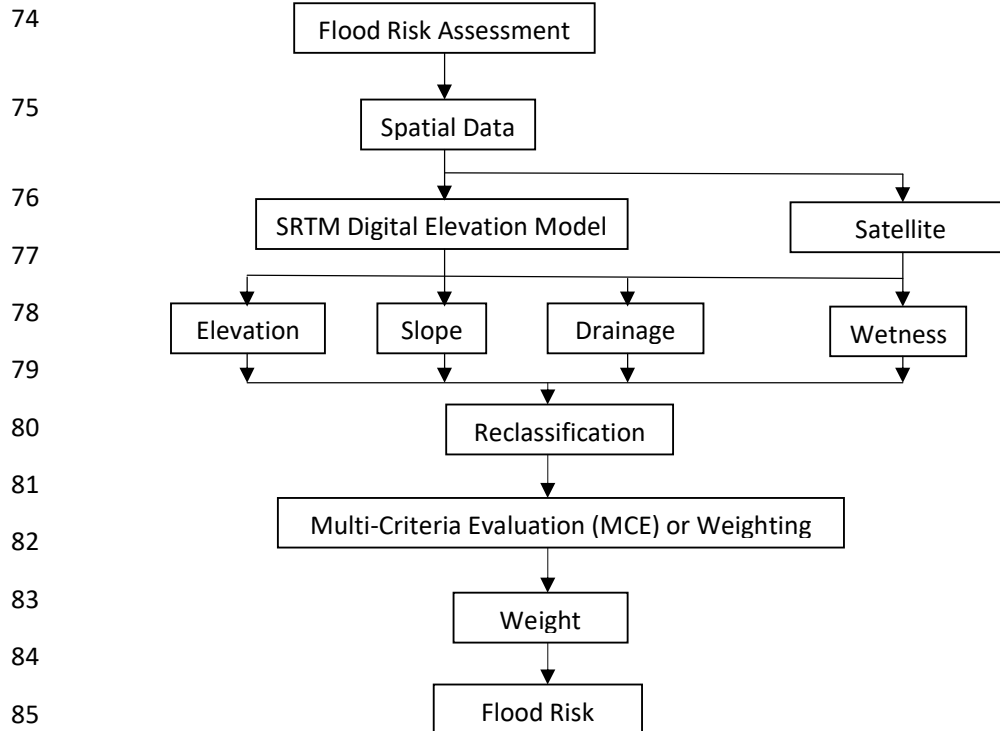

86

87

88 **Figure 2: A flow chart of the methodology adopted in the study.**

89

90 **Slope:**

Slope of any area has high influence on flood. Flat areas are more prone to flooding than steep areas. Using Arc GIS software, slope data was extracted from Shuttle radar topographic mission Digital elevation model followed by reclassification into five classes (Fig. 3). Weighting was then carried out using Ahp- Multi Criteria Evaluation (Table 1). Flat areas were given a higher weighting than steep areas.

Table1 : Weighting for slope within Zaria

S/N	Slope	Weighting
1	Steep	43
2	Moderate	27
3	Gentle	18
4	Flat	8
5	Very Flat	5

Consistency ratio =0.03

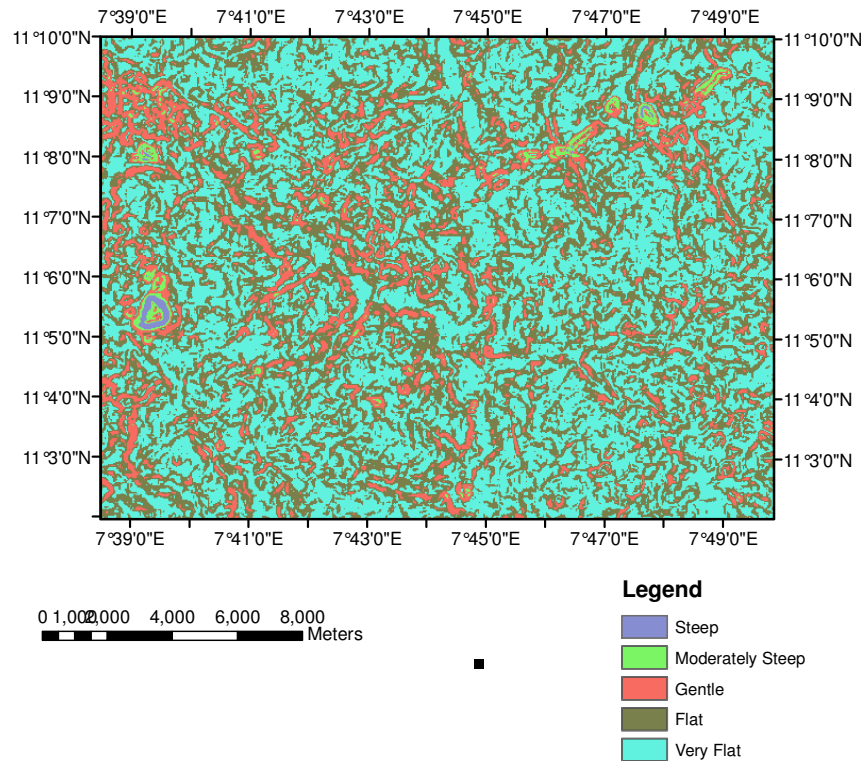


Figure 3: Slope map within the Study area.

Elevation:

Flooding generally affect low land areas, therefore elevation can be considered as an important determinant of flooding. Elevation data were extracted from Shuttle radar

topographic mission Digital elevation model (SRTM DEM) using Arc GIS software. The classification into four classes of the elevation data was then performed (Fig. 4). Weighting for each class was assigned using Ahp- multi criteria evaluation. Low lying areas susceptible to flooding were given higher weighting than high lands (Table 2).

Table2: Weighting for Elevation within the study area

S/N	Elevation	Weighting
1	Extremely High	55
2	High	23
3	Moderately High	14
4	Low	8

Consistency ratio = 0.02

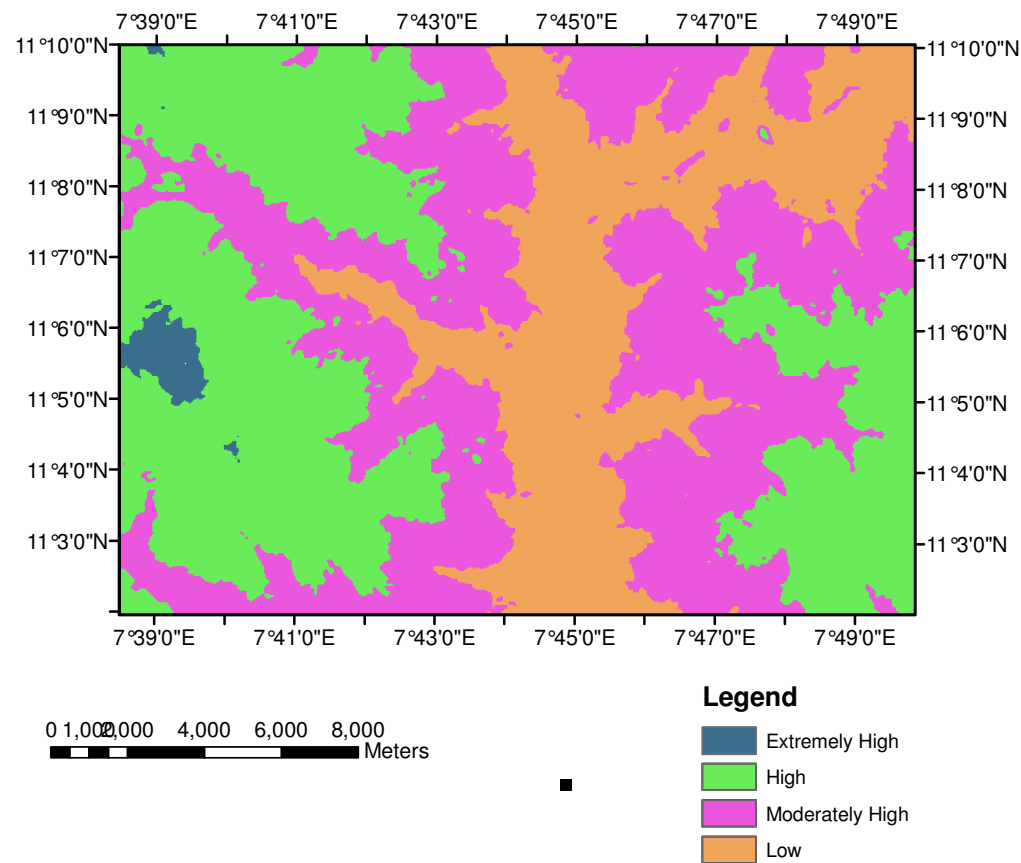


Figure 4: Elevation within the study area

Distance to Drainage:

The distance to drainage is considered as a very important factor when it comes to flood modelling. Areas that are close to drainage will be more prone to flooding than areas further away from drainage. Using the Shuttle radar topographic mission Digital elevation model

(SRTM-DEM), drainage was extracted with the aid of GLOBAL MAPPER 17.0 software. The drainage shape file was exported into Arc GIS where buffering was performed. Reclassification and weighting was later performed (Fig. 5). Areas closed to the drainage were given higher weighting than areas further away from the drainage (Table 3).

Table 3: Weighting for Distance to drainage

S/N	Buffered Distance	Distance to Drainage	Weighting
1	200	Close	57
2	500	Far	22
3	800	Very Far	14
4	2000	Extremely Far	7

Consistency ratio = 0.04

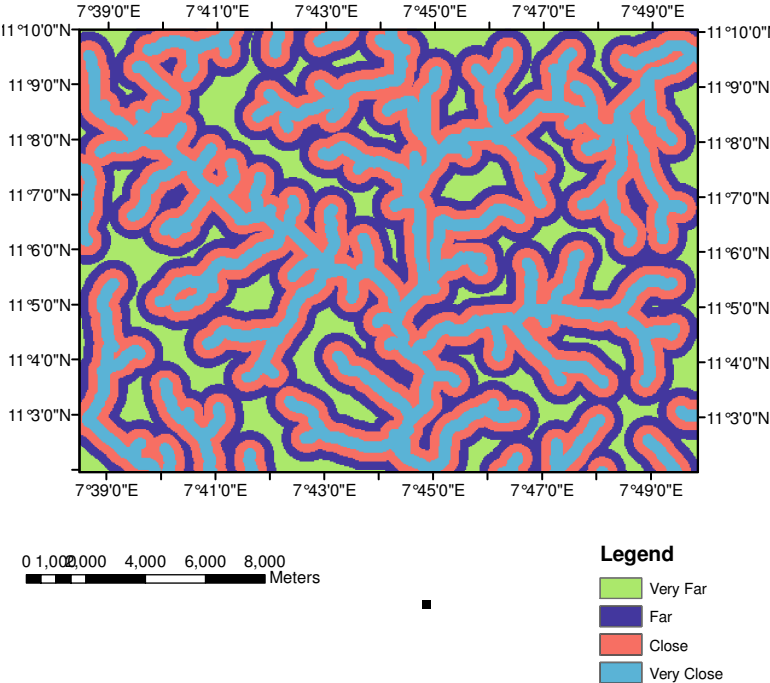


Figure5: Buffer map for drainage in the study area.

Wetness:

The degree of moisture in flood prone areas is very high due to its ability to retain water for a long period of time. Information on wetness for the study area was acquired by processing Landsat images using Tasseled Cap technique on ENVI 5.0 software. Wetness information was exported to Arc GIS software where classification was performed (Fig. 6).UsingAhp-

Multi criteria evaluation technique, areas with higher wetting were given higher weighting than areas with lower wetting (Table 4).

Table4 : Weighting for Wetness

S/N	Wetness	Weighting
1	Extremely Wet	51
2	Very Wet	22
3	Wet	15
4	Dry	7
5	Very Dry	4

Consistency ratio = 0.02

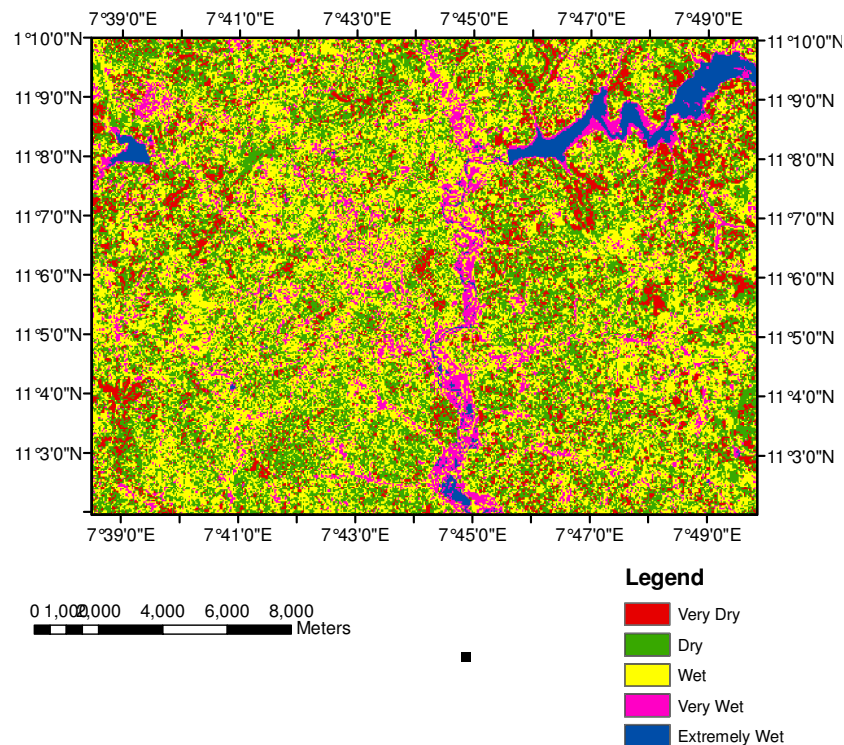


Figure6:Surface wetness map for study area.

Flood risk map:

After the generation and classification of individual layers related to flood, a flood risk map was eventually produced by combination of slope data, elevation data, Drainage distance data and wetness data using the following formula below. Integration of this data was made possible with the aid of Arc GIS 9.3 raster calculator algorithm. The result of this is the production of a flood map (Fig. 7).

$$\text{Flood risk map} = \text{Slope} + \text{Elevation} + \text{Drainage distance} + \text{Wetness}$$

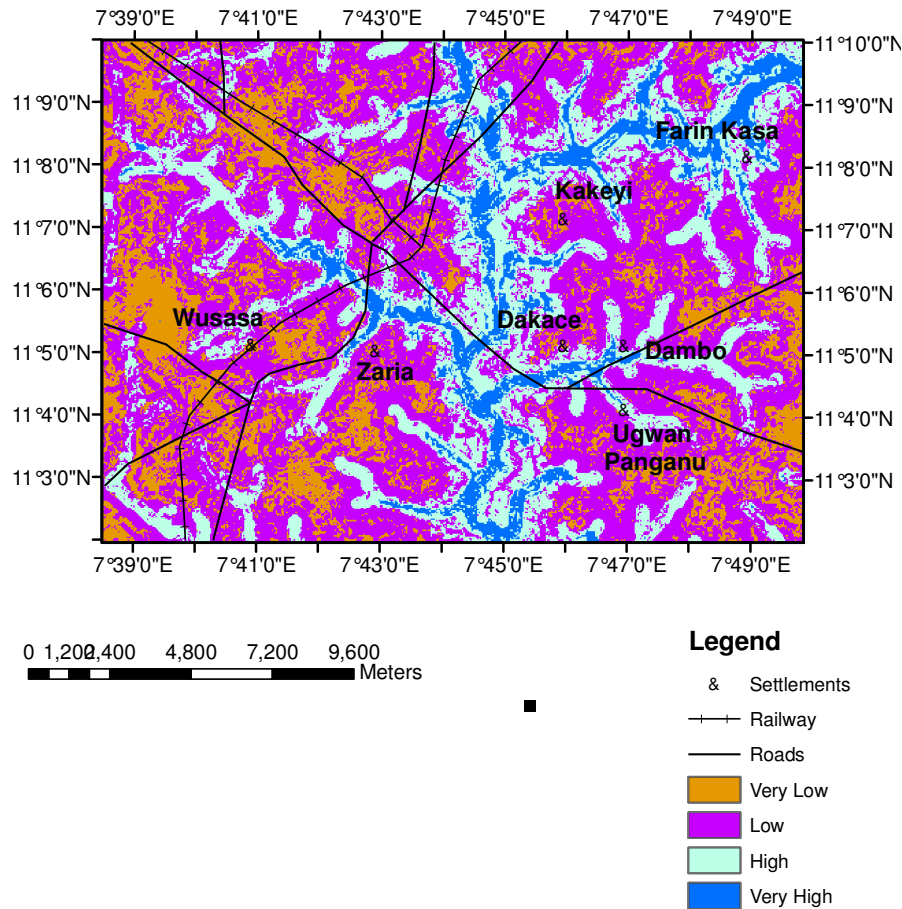


Figure 7: The flood risk map obtained for the study area.

Result and Discussion:

Application of GIS and remote sensing in identifying flood prone areas have produced fascinated results. In order to maintain a high degree of accuracy, the consistency ratio which measures the reflection of one judgment for calculated weight was kept below 0.1. Flood hazard map reveals areas having very low risk of flooding 28.3% of the total area and covers some 86.88 Km². Areas with low flood risk account for 29.5% of the study area and covers an areas extend of 90.565 Km². Areas with high risk accounted for 32.1% of the study area and has an area extend of 98.547 Km². Areas identified as having very high flood risk potential account for 10% of the study area and has an area extend of 31.007 Km². Flood risk map also reveals flood risk zones are common in the West, South West, West Central. North West and North Central. Areas of low flood risk are spread throughout the study area but

uncommon around the Central and North Eastern part of the study area. Areas of high and very high floods are observed around the central and North Eastern part of the study area.

Conclusion:

This study have revealed the significance of remote sensing and GIS in flood mapping. Flood maps for any area are invaluable in decision making with regards to environmental planning. Such a map will inform appropriate decision makers where extra efforts is required to prevent flood hazards. From the result it was observed that high risk to Very High risk zones constitute 42.1%. This zone which is highly susceptible to flood occurs in the central and South Eastern part of the study area. This reveals that an appreciable part of Zaria and Environs can be subjected to flooding, thus necessary precaution should be applied to such zones. Low flood prone areas are common around the West, South West, West Central, North West and North Central part of the study area. These zones can be deem safe with regards to flooding.

References

- Coburn, (1994).** Vulnerability and Risk Assessment, Disaster Management Training Programme module, *United Nations Development Programme*, Cambridge, United Kingdom, pp 67-68.
- Duan, M., Jixian, Z., Zhengjun, L., and Aekakkararungroj, A., (2009).** "Use of Remote Sensing and GIS for Flood Hazard Mapping in Chiang Mai Province, Northern Thailand." Paper presented at the *International Conference on Geo-spatial Solutions for Emergency Management and the 50th Anniversary of the Chinese Academy of Surveying and Mapping*, Beijing, China, September 14-16.
- Jonkman. S.N., Dawson. R.J., (2012).** Issues and challenges in flood risk management – editorial for the special issue on flood risk management. *Water*, 4, 785-792.
- Khan, S.I., Hong, Y., Wang, J., Yilmaz, K.K., Gourley, J.J., Adler, R.F., Brakenridge, G.R., Policelli, F., Habib, S., and Irwin, D., (2011).** Satellite remote sensing and hydrologic modeling for flood inundation mapping in Lake Victoria basin: Implications for hydrologic prediction in ungauged basins. *IEEE Transactions on Geoscience and Remote Sensing*, 49(1), pp85–95.
- Marriott, S.B. and Alexandar, J., (1999).** Floodplains: Interdisciplinary Approaches. V *Geological Society of London Special publication* No. 163, 1-3.

187 **Odufuwa, B., Adedeji, O., Oladesu, J.,Bongwa, A., (2012).** Flood of furry in Nigerian
188 Cities.
189 *Journal of sustainable development* Vol. 5, No 7, pp 69-79.
190 **Ouma, Y.O.,Tateishi, R., (2014).** Urban Flood Vulnerability and Risk Mapping Using
191 Integrated
192 Multi-Parametric AHP and GIS: Methodological Overview and Case Study
193 Assessment. *Water*, 6, pp1515-1545.