

Original Research Article

Development of a Manually Operated Multi-Purpose Roasting Machine

ABSTRACT

Aim: The aim of this research is to design and fabricate multi-purpose roasting machine.

Study Design: Development of a manually operated multi-purpose roasting machine was achieved with the aid of conceptual sketch, design analysis and creo parametric software

Place and Duration of Study: Department of Mechanical Engineering, Federal University of Technology, Akure, Ondo State, Nigeria, between July 2014 and October 2016.

Methodology: Design of the developed multi-purpose roasting machine was done using creo parametric software. Some factors were considered before fabrication of the developed machine such as selection of materials, operating parameters, manufacturing processes and functional requirements.

Results: The multi-purpose roasting machine was developed and tested on food items (maize and plantain).

Conclusion: The multi-purpose roasting machine was developed based on the design. The machine developed is a simple technology which can be easily operated by a single person of an average height of 1.4 m. The developed machine is a capable of roasting food items (maize, yams and plantain) depending on the choice of the operator and season of harvest. The bill of engineering measurements and evaluation (BEME) of the developed machine is 70,360 naira.

Key Words: Roasting Machine, Multi-Purpose, Development.

1.1 INTRODUCTION

Nearly all the foods we consume are processed in some way such as milling, frying and roasting. Food processing is defined as the practices used by food and beverage industries to transform raw plant and animal materials into products for consumption. The processing of food items has become an important aspect in human daily consumption of food (Heldman and Hartel, 1997).

The method of application of heat for food processing is the most prominent method in Nigeria. It is common in urban household and among the rural dwellers, who themselves through farming take roasting as an important food processing technique.

Roasting is a process by which the food product are subjected to thermal and irreversible structural changes accompanied by reduction of moisture contents purposely to enhance

digestible content for human consumption (Fellows, 2000). Transfer of heat can be determined by the property of matter and temperature. It is governed by the second law of thermodynamics which dictates that a free flow of heat is possible only from a body of higher temperature to a lower temperature. Three mechanisms modes of heat transfer are conduction, convection and radiation (Gupta, 2003).

Thermal radiation is one of the basic mechanisms for energy transfer between regions of two or more different temperatures by which heat is conveyed from one place to another without heating the intervening medium. It involves the emission of heat rays through spaces and roasting will be successfully obtained in the exposure of fresh maize to the radiant heat emitted from charcoal contained inside an enclosure chamber (Sangay, 2009). Therefore, this research work was carried out to develop a manually operated multi-purpose roasting machine in Nigeria.

1.2 BRIEF DESCRIPTION OF THE EXISTING ROASTING MACHINE

Ilori *et al.*, (2014) fabricated a maize roasting machine that has a treadle drive mechanism which serves as a power transmission system. The machine basically consisted of a roasting chamber, a longitudinal main shaft which carried a circular disc and four charcoal trays with different pattern of air flow dust.

With traditional method, roasting of maize is done by placing the charcoal inside a tray and a metal grill is placed on top of the tray mainly to

separate the maize to be roasted and charcoal. The maize to be roasted is placed on top of metal grill and hand fan is used to blow air which support combustion. The faster the hand fan blows, the faster the air current, the faster the rate of combustion and the rate of heat transfer from the charcoal to the maize. The process becomes strenuous as the operator tired out with time before the maize is completely roasted. Also, direct contact and exposure of the human body to direct heat emitted from the charcoal may have side effect on the human skin.

1.3 BRIEF DESCRIPTION OF THE DEVELOPED MACHINE

The developed machine has a sliding mechanism connected to the charcoal chamber which allows the regulation of temperature of the heat depending on the food items to be roasted. The developed machine operates in such a way that once the handle attached to the flywheel is roasting, flywheel undergoes rotatory motion. As the motion from the handle rotates the flywheel, it allows the chains and sprockets to rotate which has being incorporated with the flywheel. Food item holder and blower have being incorporated with chains and sprockets. Once the chains and sprockets rotate, the food item holder rotates likewise the blower will generate air that has being channeled to the charcoal chamber. The developed machine is capable of roasting food items such as maize, plantain and yam depending on the choice of the operator. It can be operated by single person with an average height of 1.4 meters.

2.1 METHODOLOGY

Research methodology used is:

2.1.1 Design Analysis

The development of the multi-purpose roasting machine was achieved with the aid of conceptual sketch, design and analysis. Design of the developed machine was done using creo parametric software and some of the design analysis of the machine is;

2.1.1.1 Design Analysis of the Frame

A frame is a structure on which the components of a machine are assembled. The frame of the multi-purpose roaster was designed to accommodate the flywheel, chains, sprockets, roasting chamber and charcoal chamber etc. The frame is made from 40 mm L-shaped angle bar.

Volume (V_O) of the Outer Long Braze = LBT

Density (ρ) of angle bar = 0.00782 kg/cm³

$$V_O = 55.6 \times 4 \times 4$$

Volume (V_I) of the Inner Long Braze = lbt

$$V_I = 55.6 \times 3.8 \times 3.8 \text{ cm}^3$$

Total Volume of Long Braze = $V_O - V_I$

$$\text{Total Volume of Long Braze} = 86.74 \text{ cm}^3$$

M is the Mass of the Long Braze in kg

$$M = \rho V$$

$$M = 0.00782 \times 86.74$$

$$M = 0.68 \text{ kg}$$

$$\text{Total Mass of Long Braze} = 3 \times 0.68$$

Total Mass of Long Braze = 2.04 kg

Volume (V_O) of the Outer Short Braze = LBT

$$V_O = 41.6 \times 4 \times 4$$

Volume (V_I) of the Inner Short Braze = lbt

$$V_I = 41.6 \times 3.8 \times 3.8 \text{ cm}^3$$

Total Volume of Short Braze = $V_O - V_I$

$$\text{Total Volume of Short Braze} = 64.90 \text{ cm}^3$$

M is the Mass of the Short Braze in kg

$$M = \rho V$$

$$M = 0.00782 \times 64.90$$

$$M = 0.51 \text{ kg}$$

$$\text{Total Mass of Short Braze} = 4 \times 0.51$$

Total Mass of Short Braze = 2.04 kg

Volume (V_O) of the Outer Leg = LBT

$$V_O = 65.3 \times 4 \times 4$$

Volume (V_I) of the Inner Leg = lbt

$$V_I = 65.3 \times 3.8 \times 3.8 \text{ cm}^3$$

Total Volume of Leg = $V_O - V_I$

$$\text{Total Volume of Leg} = 101.87 \text{ cm}^3$$

M is the Mass of the Leg in kg

$$M = \rho V$$

$$M = 0.00782 \times 101.87$$

$$M = 0.80 \text{ kg}$$

$$\text{Total Mass of Leg} = 4 \times 0.80$$

Total Mass of Leg = 3.20 kg

Total Mass of the Frame = Mass of the Long Braze + Mass of the Short Braze + Mass of the Leg.

Total Mass of the Frame = 2.04 + 2.04 + 3.20

Total Mass of the Frame = 7.28 kg.

2.1.1.2 Design Analysis of Roasting Chamber

In designing the roasting chamber, various lengths and diameters of maize and plantain were considered. The Roasting Chamber is formed from a galvanized sheet of 60 cm by 50 cm.

Volume (V_O) of the Outer Roasting Chamber = LBH $V_O = 60 \times 50 \times 14.5$

Volume (V_I) of the Inner Roasting Chamber = lbh

$V_I = 58 \times 48 \times 12.5$

Volume (V_H) of the Holes = $\frac{\pi d^2 h}{4} \times 160$

$V_H = \frac{3.142 \times 2^2 \times 0.2}{4} \times 160$

Volume (V_{hh}) of the Hanger Holes = $\frac{\pi d^2 h}{4} \times 10$

$V_{hh} = \frac{3.142 \times 4^2 \times 14.5}{4} \times 10$

Total Volume of Roasting Chamber = $V_O - (V_I + V_H + V_{hh})$

Density of galvanized sheet is 0.00782 kg/cm³.

Total Volume of Roasting Chamber is 677.71 cm³ and Mass of Roasting Chamber is 5.30 kg

2.1.1.3 Design Analysis of Charcoal Chamber

The charcoal chamber was constructed with adjusted mechanism having dimensions quite lesser than that of the roasting chamber. The material used was sheet metal of 2mm thickness.

Volume (V_O) of the Outer Charcoal Chamber = LBH $V_O = 58 \times 46 \times 6$

Volume (V_I) of the Inner Charcoal Chamber = lbh

$V_I = 56 \times 44 \times 4$

Total Volume of the Charcoal Chamber = $V_O - V_I$ where:

Density of sheet metal is 0.00782 kg/cm³.

Total Volume of the Charcoal Chamber is 615.2 cm³ and Mass of Charcoal Chamber is 4.81 kg.

2.1.1.4 Design Analysis of Chain

Chain is used for transmission of mechanical power on much domestic and industrial mechanism. It has a surprising number of parts; roller turns freely on the bushing which is attached on each end to the inner plate and a pin passes through the bushing and is attached at each end to the outer plate (Johns, 2003).

2.1.1.5 Design Analysis of Sprocket

Sprocket is a toothed wheel upon which a chain rides. Selection of a sprocket depends on the dimensions of the chain which is to run upon it (i.e. pitch, roller diameter, roller width of the chain and number of teeth in the sprocket (Johns, 2003).

2.1.1.6 Design Analysis of Bearing

Bearing is a machine element that constrains relative motion to only the desired motion. The design of roller bearing used provided free linear

movement and prevented motion by controlling the vectors of normal forces that bear on the moving parts (Harris and Tedric, 2000).

2.1.2 Fabrication Process

The construction of the developed machine was done at Adesuyi welding shop located at Car street, Akure, Ondo State. Before construction, some factors were considered such as selection of materials, operating parameters, manufacturing processes and functional requirements. The selection of materials for the construction of multi-purpose roasting machine was based on availability of the material, cost of materials and overall weight of the machine.

2.1.2.1 Frame

The frame is a table like structure meant to accommodate and provide necessary support for various parts of the machine. The frame is made from 40 mm L-shaped angle iron bar. Three long braze, four short braze and four legs were welded together based on the design analysis to form figure 1. Dimension of the Long braze, short braze and legs were 65.3 cm, 55.6 cm and 55.6 cm respectively.



Figure 1. Frame

2.1.2.2 Roasting Chamber

The roasting chamber is an important component in the machine because it accommodates other components such as food item holder, chains and sprockets etc. Two pieces of 2 mm galvanized sheet of length 60 cm by 14.5 cm were marked out and cut using

cutting machine. Two pieces of 2 mm galvanized sheet of breadth 50 cm by 14.5 cm were marked out and cut using cutting machine. Also, one piece of 2 mm galvanized sheet of 60 cm by 50 cm was marked out; cut and 160 holes of diameter 2 cm were driven by drilling machine. Ten hanger holes of diameter 1cm were driven on the sides of the roasting chamber of dimension 60 cm by 14.5 cm. All the pieces were welded together based on design analysis to form figure 2.




Figure 2. Roasting Chamber

2.1.2.3 Charcoal Chamber

Charcoal chamber was constructed with adjusted mechanism having dimensions quite lesser than that of the roasting chamber. Two pieces of 2 mm galvanized sheet of length 58 cm by 6 cm were marked out and cut using cutting machine. Two pieces of 2 mm galvanized sheet of breadth 46 cm by 6 cm were marked out and cut using cutting machine. Also, one piece of 2 mm galvanized sheet of 58 cm by 46 cm was marked out and cut. All the pieces were welded together based on design analysis to form charcoal chamber.

The charcoal chamber stands on supports that are fabricated from metal stripes that run through the length and breadth of the roasting chamber so that the charcoal chamber can slide out from the stand.

2.1.2.4 Blower Housing

It was fabricated from 2.0 mm thick metal sheet, folded and there was inlet of incoming air from the impeller. The incoming air from the impeller was channeled directly into the charcoal chamber to support combustion.

2.1.2.5 Food Item Holder

It was fabricated from mild steel and was used to hold whatever is meant to be roasted in the machine. It is a tiny rod that has a cylindrical cross section and was designed to rotate once the chains and sprockets is rotating

2.2 Welding and Assembly of Fabricated Machine Component

The various parts of the machine that were welded together include the frame, roasting chamber, food item holder and charcoal chamber etc.

These machine members include; the insertion of the roasting chamber which accommodates chains, sprockets, bearings, food item holder , construction of the stand for the charcoal chamber, fixing of the bearing into its housing and attaching the food item holder to the sprockets. Ten small sprockets were inserted on the both outside of the roasting chamber while three small sprockets were rigidly attached with nuts to the blower shafts. Ten ball bearings were inserted to the shaft of the both inside of the roasting chamber while another ten ball bearings were rigidly inserted to the shaft of the both outside of the roasting chamber. All parts of the machine were firmly secured to ensure rigidity and support. The finishing of the fabricated

machine involves grinding the welded joints and painting with emulsion paint.

3.1 RESULT AND DISCUSSION

The fabricated multi-purpose roasting machine was developed and tested. Two food items (maize and plantain) were used for performance evaluation. The times used to roast them were 12 minutes and 20 minutes respectively compared to the existing method which took 21 minutes and 35 minutes respectively. The figure 3 shows the orthographic view of the multi-purpose roasting machine and plate 1 shows the developed machine.

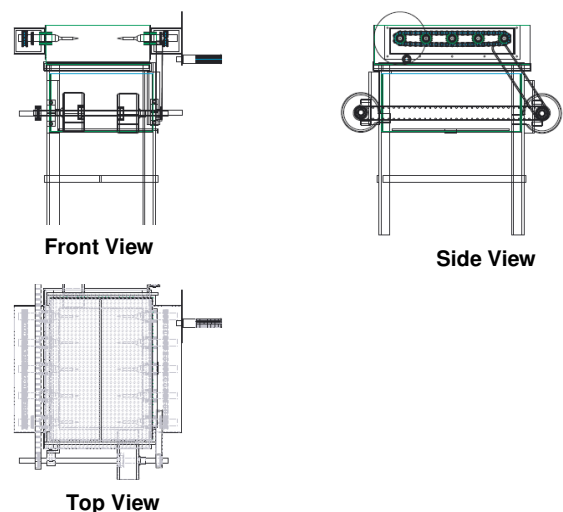


Figure 3. Orthographic View of the Multi-Purpose Roasting Machine



Plate 1. Developed Multi-Purpose Roasting Machine

4.1 CONCLUSION

The multi-purpose roasting machine has been developed based on the design. The machine developed is a simple technology which can be easily operated by a single person of an average height of 1.4 m. The machine is capable of roasting food items (maize, yams and plantains) depending on the choice of the operator. The bill of engineering measurements and evaluation (BEME) of the developed machine is 70,360 naira.

REFERENCES

Fellows PJ. Food Processing Technology; Principle and Practice, Second Edition; Woodhead Publishing Limited, Cambridge, England. 2000; Pg (22- 66, 343- 348).

Gupta CP. Engineering Heat Transfer, Mechanical Engineering Department, University of Roorkee, India. 2003.

Harris, Tedric A. Rolling Bearing Analysis, Fourth Edition; Wiley-Interscience, Publishing Limited, New York. 2000.

Heldman DR, Hartel RW). Principles of Food Processing, New York Chapman and Hall. 1997.

Ilori TA, Raji AO, Adejumo AO, Kilanko O. Development and Performance Evaluation of a Maize Roaster. International Journal of Science, Technology and Society. 2014; 2(5): 161-164.

Johns WE. Notes on Sprockets and Chains.

Accessed 23 April 2016. Available:

<http://www.gizmology.net/sprocket.htm>. 2003.

Sangay LH. Development and Evaluation of a Corn Roasting Machine for a Small Scale Production of Cornflake (Tengma) in Bhutan.

Department of Agricultural Engineering, University of Kasetsart, Thailand. Thailand International Development Cooperation Agency (TICA), Thailand. (2009).