

Original research papers

**ROAD TRAFFIC AND CONGESTION SEVERITY IN THE SEKONDI-TAKORADI
METROPOLIS**

ABSTRACT

Traffic saturation in both pedestrian and vehicular situations is common on all the principal streets of Sekondi-Takoradi Metropolis. The situation has become to a large extent unbearable to the inhabitants of the city. In the study, the following surveys were conducted: Manual Classification Count, Intersection Count, Screenline Classification Count, Parking Studies, Pedestrian Studies, Travel Time Studies, Mode of Travel and Waiting Times Surveys. The study revealed that traffic variation factors were almost the same at the designated classified Stations, Agona Nkwanta Road recorded the highest vehicular traffic during the AM and PM peak periods, and the busiest intersection during the AM peak period was the Sekondi Road / Takoradi Polytechnic Road. The highest pedestrian AM hourly volume of 2861ped/hr was recorded at Ashanti Road. The Ahanta Road registered the highest (2662 ped/hr) in pedestrian volume for the PM peak period. The highest Congestion Severity Index of 65.74 minutes delay per kilometer travelled and 86.82 minutes delay per kilometer travelled were identified for the AM and PM peak periods respectively at the Takoradi Market Circle Round About. Buses were the frequently used mode of transport for most commuters in the city.

Keywords: { Traffic, Pedestrian, Congestion, Screenline, and Congestion Severity Index }

1. INTRODUCTION

Cities are the powerhouses of economic growth for any country. Traffic congestion occurs when a volume of traffic or modal split generates demand for space greater than the available road capacity; this point is commonly termed saturation. There are a number of specific circumstances which cause or aggravate congestion; most of them reduce the capacity of a road at a given point or over a certain length, or increase the number of vehicles required for a given volume of people or goods. For the purpose of economic activities, it is imperative to facilitate movements. Traffic and transportation problems in Sekondi-Takoradi are noticeable with the increasing demands for the movement of goods and services within the city. The city expanded dynamically without any planning and control due to the rapid socioeconomic changes. The Metropolis is the nucleus of the Western region of Ghana and plays a big role in controlling the economic development of not only the Region but also the entire Nation at large. The Region is endowed with huge reserves of natural resources such as; crude oil, timber, diamond, gold and other mineral resources. It contributes immensely to the food basket of the Ghanaian economy with its rich cocoa farms which are exported for foreign exchange. Due to lack of proper planning and control over land use activities, people from various parts of the country have moved to the city and made it a

place for residential, business and commercial activities. Therefore, there is high migration rate of persons and vehicles into the city. Such rapid and uncontrolled developments have created an unacceptable level of disparity in transportation demand and supply situation, which have resulted in traffic congestion in both pedestrian and vehicular cases. To reach at an equilibrium level between the demand and the supply of transport and traffic system, it is required to implement traffic engineering and transport planning measures on the basis of scientific studies to reduce the **delay spent** in traffic, the man hours lost due to road traffic congestion and determine an index which would serve as a basis for determining the congestion severity of the Metropolis.

2.0 RELATED WORKS

2.1 Definition of Traffic Congestion

Traffic congestion is the phenomenon of increased disruption of traffic movement on an element of the transport system, observed in terms of delays and queuing, that is generated by the interactions among the flow units in a traffic stream or in intersecting traffic streams. The phenomenon is most visible when the level of demand for movement approaches or exceeds the present capacity of the element and the best indicator of the occurrence of congestion is the presence of queues [26].

2.2 Occurrence of Traffic Congestion

[23], note that the occurrence of congestion in all transportation facilities may be accounted for by three features that characterise travel demand and supply. The reasons are that demand varies over time, supply is relatively fixed over long time periods and output is not storable.

2.3 Traffic Congestion Measurement

[15], [25] and [21] proposed several techniques that may be employed in studying and quantifying congestion. According to a review conducted by [21] these techniques could be generally classified under *highway capacity manual (HCM)* measures; *queuing-related* measures; and *travel time-based* measures respectively. Of these three, the *travel time-based* measures are the commonly used methods in studying travel time, travel speed and delay. This is because they are easy to understand by both professionals and the travelling public. Also their flexibility makes it easy to describe traffic conditions at various levels of resolutions in both space and time. Not surprisingly, it is said that, 'an increasing number of transportation agencies are switching to travel time measures to monitor and manage congestion' [24]. [24] Propose the need to compute representative speed values by aggregating the data at the segment level first. This approach enabled them to reduce the huge volumes of data and made it possible to produce simplified reports out of them. They then proceeded to devise several equations that could be used to aggregate the data. One of such equations which calculate the *average* travel time per segment is stated thus:

$$\bar{t}_i = \frac{1}{m_i} \sum_{j=1}^{m_i} t_{L_j} = \frac{1}{m_i} \sum_{j=1}^{m_i} \frac{L_i}{u_{ji}} = L_i \frac{1}{m_i} \sum_{j=1}^{m_i} \frac{1}{u_{ij}}$$

Where m_i is the number of runs (or sample size) per segment; L_i is the length of each segment and u_{ij} is the j th speed record associated with segment i .

3.0 METHODOLOGY

For this study, previous reports from the Department of Urban Roads (DUR), Sekondi-Takoradi Metropolis were acquired. Based on those reports, data have been collected from the following surveys for the year 2014: Manual Classification Count, Intersection Count, Screenline Classification Count, Parking Studies, Pedestrian Studies, Travel Time Studies, Mode of Travel and Waiting Times Surveys.

3.1 STUDY AREA TRANSPORTATION NETWORK

The study was designed to determine the hourly traffic volume on principal road networks. The data collection procedure took the numerical inventory of the road network as the number of road-way intersections or nodes, number of road links to be analyzed, connectivity of the nodes to and from road links including length of each link in kilometer. For each individual link the number of lanes available in one direction, number of ways, average speed of all types of vehicles in the link, average speed of each individual type of vehicle in the link etc were considered for input. The information about the road network was obtained from DUR Sekondi-Takoradi. A total of 212.9km of road was selected for the present study. Only the main roadway links, which are normally used for inter zonal movements was taken into consideration in this study.

3.2 PEDESTRIAN SURVEY

In Ghana, walking is very significant in urban areas as pedestrians form the largest single road-user group in terms of the total number of trips. Huge number of pedestrians may aggravate the traffic congestion if sufficient foot path is not available for the movement of pedestrians. Considering the importance of pedestrian activities, pedestrian counts were undertaken at 15 minutes intervals for duration of 12 hours, on one weekday per location within the Metropolis.

3.3 CONGESTION SEVERITY INDEX (CSI)

Based on the data gathered, only the Congestion Severity Index (CSI) was used to determine the severity of the traffic situation for the year 2014 in the Metropolis.

$$CSI = \left(\frac{\text{Total Delay (Vehicle-hours) per Hour}}{\text{Total Vehicle-Kilometer Travel in Thousand per Peak Hour}} \right)$$

It indicates the loss of Vehicle-hour per Thousand Vehicle-Kilometer travel in Peak Hour. It can easily be converted to delay per vehicle-km travel. CSI value increases exponentially with increasing population. It means that the increase rate of CSI remain slower up to the time required to fully saturate the network, then it increase abruptly.

4.0 ANALYSIS AND RESULTS OF THE STUDY

Results of the survey are summarized in tables and graphs to clarify the road traffic and congestion severity in the Sekondi-Takoradi Metropolis. The analysis of the various field studies are outlined below.

4.1 VARIATION FACTORS FOR MANUAL CLASSIFIED COUNT PER STATION IN SEKONDI-TAKORADI

From the 7-day, 24 hour manual classified count, an average 24 hour daily traffic was calculated using Excel. The total average 24 hour traffic for each classified Station was divided by the average total 12 hour count to obtain the Variation Factor (VF) for the various Stations.

Figure 4.1 shows the variation factors obtained at the various classified Stations.

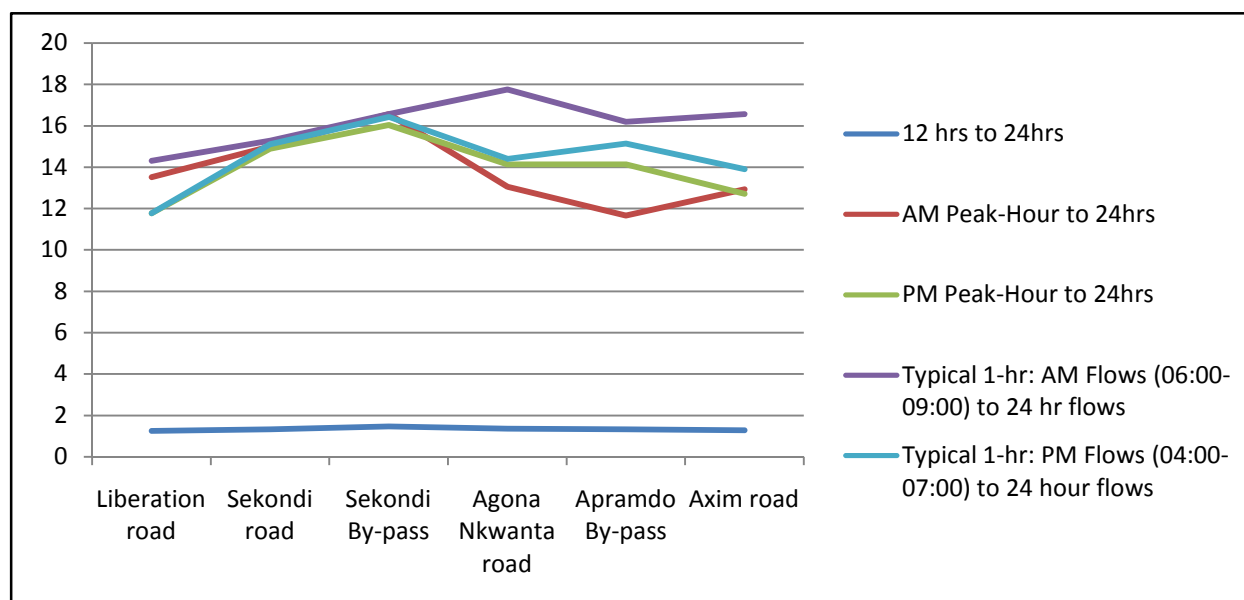


Figure 4.1: Traffic Variation Factors for Manual Classified Count per Station in Sekondi-Takoradi

Considering the Variation Factors for the descriptor (*12hrs to 24hrs*) at all classified Stations in Fig.4.1, it is clear that the change in variation is almost the same for all stations. The descriptor (*AM Peak-Hour to 24hrs*), showed appreciable level of changes in the Variation Factors with Sekondi By-Pass having the highest VF of 16.56 and Apramdo By-Pass having the least (11.65). Sekondi By-Pass registered the highest VF (16.03) for the descriptor (*PM Peak-Hour to 24hrs*) whiles Liberation Road had the least (11.76). The VF's for the descriptors: *Typical 1hr: AM Flows to 24hr Flows* and *Typical 1hr: PM Flows to 24hr Flows*, recorded higher (17.75 and 16.42) values for Agona Nkwanta Road and Sekondi By-Pass respectively. On the whole, the changes in variation for the various descriptors at the Manual Classified Count per station showed slight changes in variation.

4.2 Screenline Traffic Volumes in Sekondi-Takoradi

Screenline counts were undertaken at 28 stations in Sekondi-Takoradi. [22] determined the peak hour periods for both AM (06:00-09:00) and PM (04:00-07:00) for the Metropolis. The traffic data obtained from the screenline counts were analysed to determine the total 3 hour AM peak period and 3 hour PM peak hour period. The summary results of the traffic volumes at the screenline stations for the periods are represented in figure 4.2. From the graph, Agona Nkwanta Road recorded the highest 3hours peak traffic during the AM and PM period with peak volume of 5286 vehs/hr and 6666 vehs/hr respectively, followed by Liberation Road with 4829 vehs/hr and 4342 vehs/hr for the AM and PM peak volumes respectively. African Beach Hotel Road recorded the least peak volume for the AM and PM with corresponding values of 321 vehs/hr and 475 vehs/hr respectively.

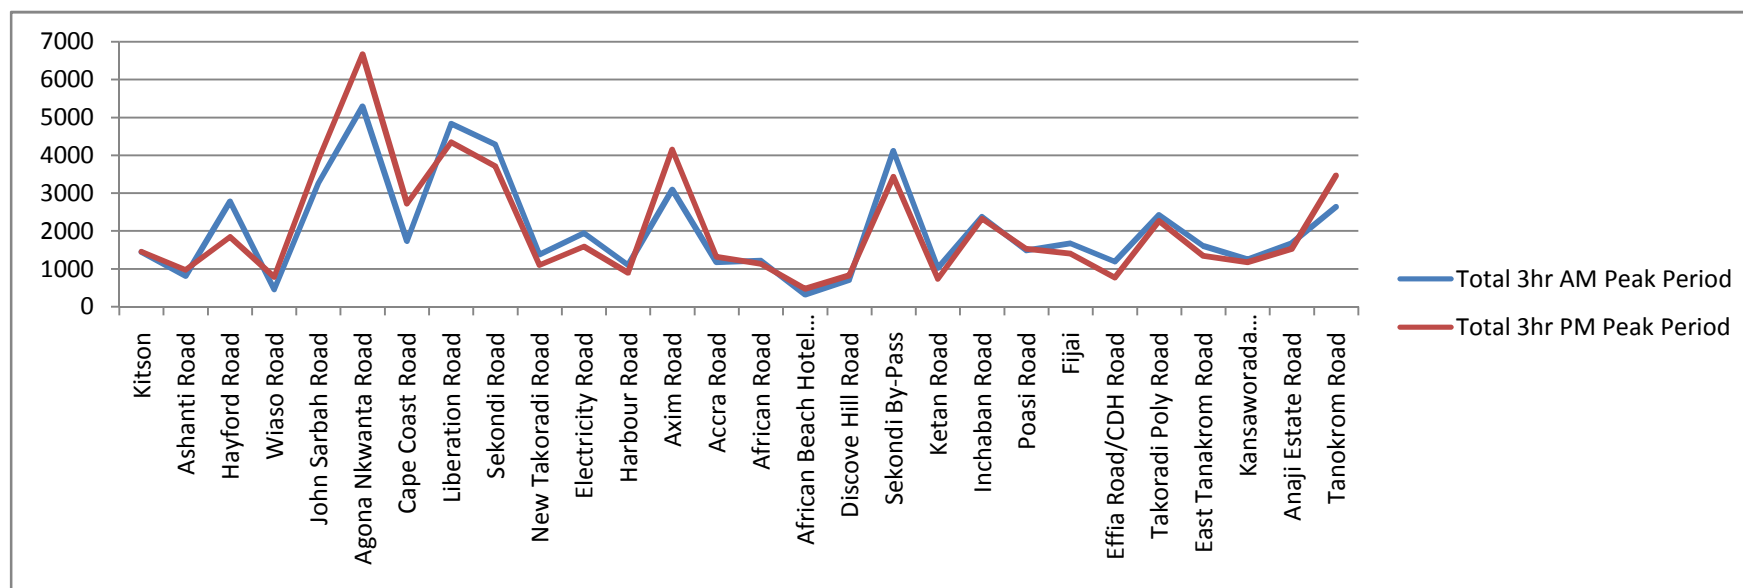



Figure 4.2: Total 3hour AM and PM Peak Periods.

4.3 INTERSECTION COUNTS

Intersection Counts were undertaken at 33 number designated intersections. The traffic data obtained from the Counts were analysed for the assessment of the junction capacity and traffic safety. The summary results at the designated intersections during the peak hours (i.e. 06:00AM-09:00AM and 04:00PM- 07:00PM) have been presented in figure 4.3.

From the calculation of peak hour flows, it was realized that the intersection with the largest peak hour volume in Sekondi-Takoradi was 4601 vehs/hr and this occurred at the Sekondi Road/Takoradi Poly Road intersection in the morning, followed by 4244 vehs/hr in the evening which occurred at Sekondi By-Pass/Ntankoful Road Junction.

153 The AM and PM Peak hour volumes obtained at all the junctions studied are shown in Figure 4.3

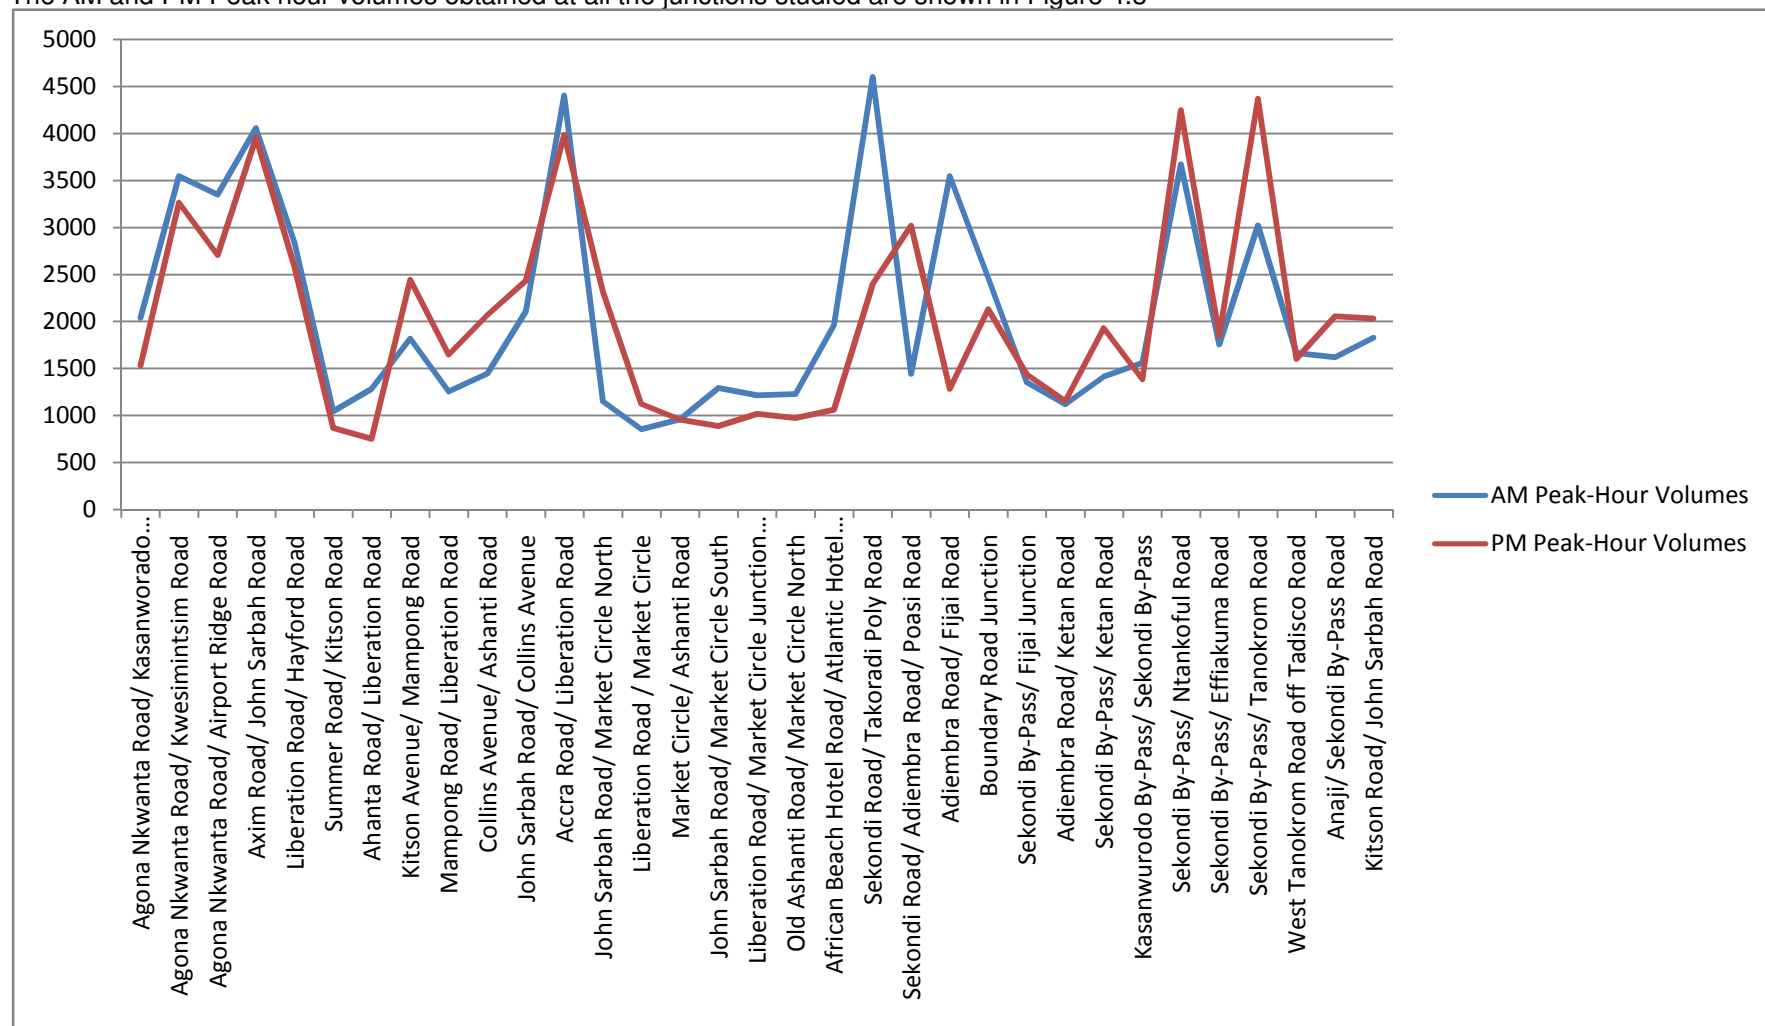

154 Figure 4.3: Intersections Count during the peak hours
155
156

4.4 PARKING STUDIES

Data obtained from the parking studies was analysed to determine the average duration and number of vehicles that used the facility. This was done to determine the demand for on-street parking in the Central Business District (CBD). The summary results of the parking studies are shown in Table 4.1.

Table 4.1: characteristics of on-street parking in the Metropolis

Station	Area	Average period (minutes)	Maximum Accumulation	Number of vehicles that used the facility
PS1	Liberation Road	52	95	635
PS2	John Sarbah Road	71	98	878
PS3	Kitson Road	122	84	657
PS4	Collins Avenue	53	141	1002
PS5	Kintampo Road	98	177	1346
PS6	Ashanti Road	103	248	1729
PS7	Market Circle	24	188	1212

From the table, it was realized that PS6 had the most vehicles parked along it followed by PS5 and the route with the least vehicles parked along it being Liberation Road whilst the highest and least average parking durations were 122 minutes and 24 minutes on the Kitson Road and Market Circle respectively.

4.5 PEDESTRIAN STUDIES

The pedestrian data obtained was analysed to determine the pedestrian volumes at crosswalks during the peak periods. 10 number stations in the Metropolis were considered for the count. Figure 4.4 is a display of the pedestrian characteristics in terms of volume in the city.

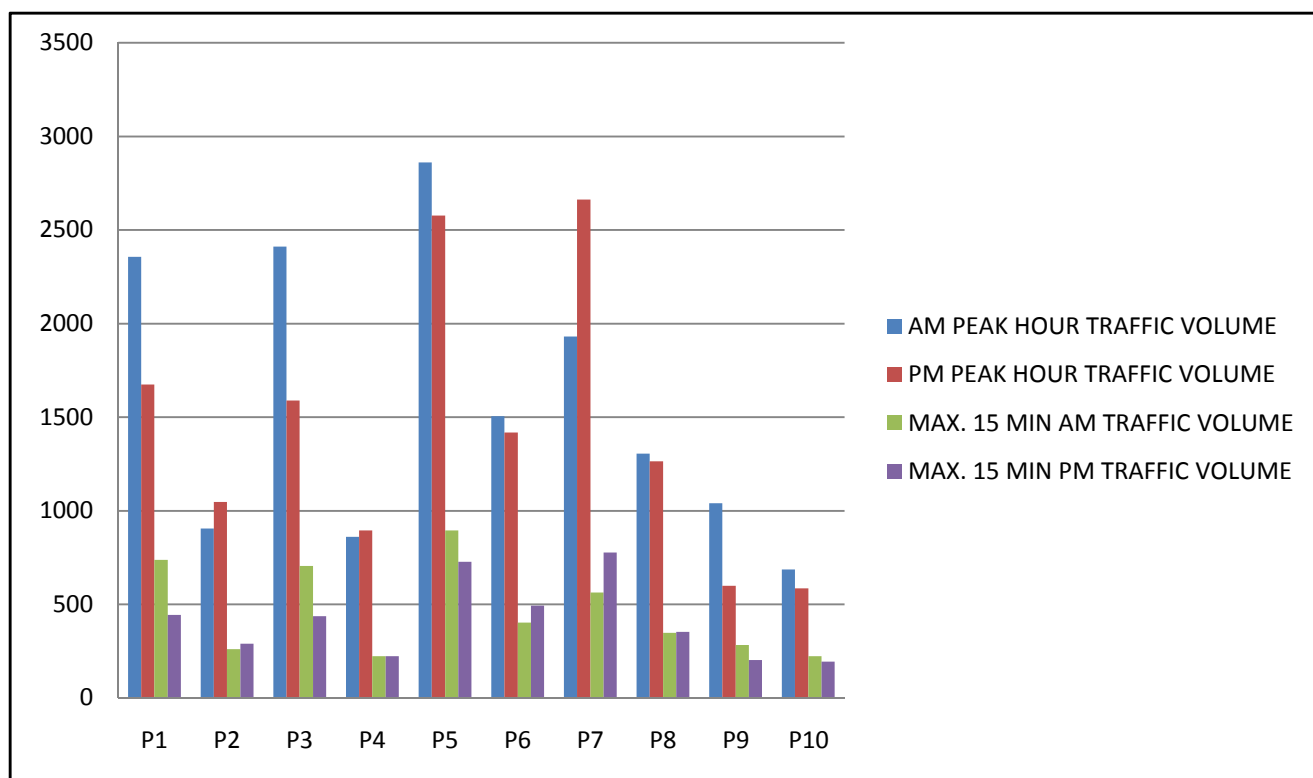


Figure 4.4: peak Pedestrian Volume Count in the Metropolis

Ashanti Road recorded the highest pedestrian AM hourly volume of 2861 ped/hr while the highest pedestrian crossing hourly volume during the PM period occurred on the Ahanta Road with 2662 ped/hr.

4.6 CONGESTION SEVERITY INDEX (CSI) ON SELECTED ROADS AND TRAVEL TIMES DURING THE PEAK PERIODS

Tables 4.2 and 4.3 show summary results of travel times and CSI during the AM and PM peak periods respectively in the Metropolis. From the summary results, the lowest operating speeds of 1.91 km/hr for the AM peak period and 1.21 km/hr for the PM peak period both occurred at the Market Circle Round about. Poasi route recorded the highest operating speed of 18.84 km/hr and 13.99 km/hr for the AM and PM peak periods respectively. The highest CSI values for both the AM and PM peak periods in the year 2014 were recorded at the Market Circle Round About. It indicates that on the average 65.74 minutes delay per kilometer travel occurs at the Market Circle Road About during the AM peak hour and 86.82 minutes delay per kilometer travel occurs during the PM peak hour at the same location. Poasi Road recorded the least CSI values for both the AM and PM peak periods.

208 **Table 4.2: summary results of travel times and CSI during the AM peak period**

Route	Length (Km)	Average Peak Time (minutes)	Average Peak Operating Speed (Km/hr)	Average Impedance (min/km)	Highest Average Delay time (minutes)	CSI (delay mins/km)
Market Circle to Harbour	2.5	16.23	9.24	6.49	12.23	4.89
Market Circle Round About	0.65	20.43	1.91	31.43	42.73	65.74
West Liberation Road	1	9.51	6.31	9.51	10.58	10.58
Poasi Road	4	12.74	18.84	3.19	7.24	1.81
Axim Road	1.95	8.82	13.27	4.52	6.88	3.53
Sekondi By-Pass	8.6	51.7	9.98	6.01	74.26	8.63
Sekondi Road	2.96	15.76	11.27	5.32	58.37	19.71
Kitson Avenue	0.6	7.66	4.7	12.77	35.82	59.7
Kasanwurado-Aperamdo By-Pass	7.5	32.38	13.9	4.32	21.54	2.87
Agona- Nkwanta Road	3.4	19.23	10.61	5.66	47.46	13.96

209

210

211

212 **Table 4.3: summary results of travel times and CSI during the PM peak period**

Route	Length (Km)	Average Peak Time (minutes)	Average Peak Operating Speed (Km/hr)	Average Impedance (min/km)	Highest Average Delay time (minutes)	CSI (delay mins/km)
Market Circle to Harbour	2.5	22.65	6.62	9.06	17.22	6.89
Market Circle Round About	0.65	32.34	1.21	49.75	56.43	86.82
West Liberation Road	1	9.85	6.09	9.85	14.25	14.25
Poasi Road	4	17.16	13.99	4.29	10.24	2.56
Axim Road	1.95	14.25	8.21	7.31	7.28	3.73
Sekondi By-Pass	8.6	56.31	9.16	6.55	78.41	9.12
Sekondi Road	2.96	47.35	3.75	16	65.47	22.12
Kitson Avenue	0.6	15.36	2.34	25.6	41.2	68.67
Kasanwurado - Aperamdo By-Pass	7.5	43.85	10.26	5.84	34.38	4.58
Agona-Nkwanta Road	3.4	27.48	7.42	8.08	52.14	15.34

213

214

215

4.7 MODE OF TRAVEL AND WAITING TIMES BY PASSENGERS IN THE CITY

Mode of travel and waiting times by passengers were investigated and the findings are shown in figures 4.5, 4.6 and 4.7. From figure 4.5, the frequently used mode of transport by passengers was bus, followed by walking, taxi, private car and others. Figure 4.6 showed that the journey time to terminal by most passengers was below 15 minutes with the least time duration between 45- 60 minutes. Figure 4.7 indicates that the waiting time in queues and vehicles by most passengers at terminal was almost evenly distributed over the durations. The highest waiting time was between 45- 59 minutes, followed closely by 15- 29 minutes and the least duration being over 90 minutes.

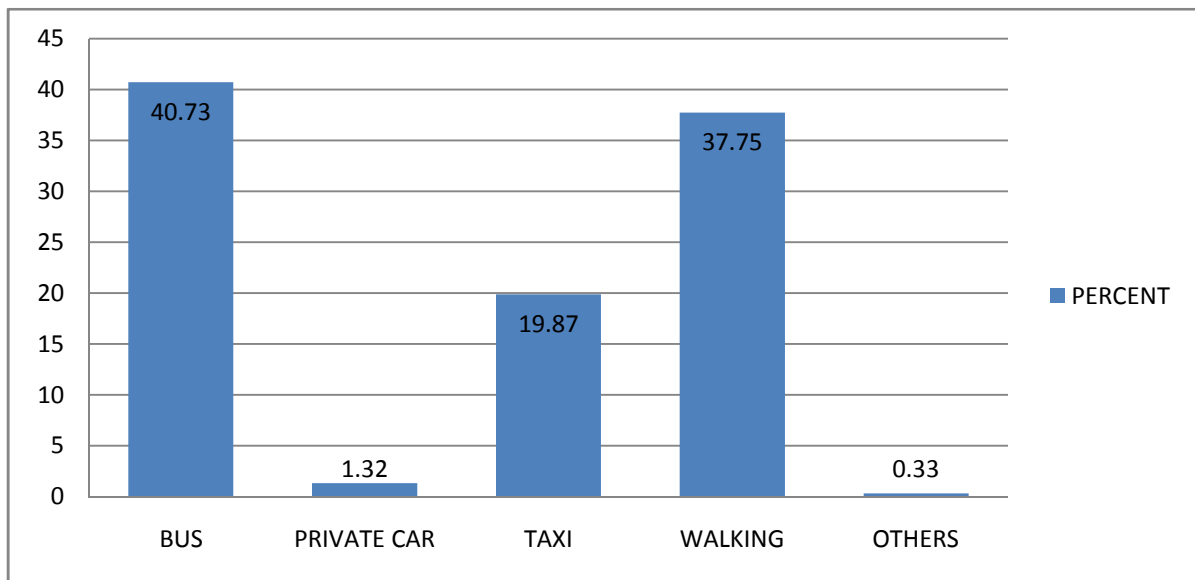


Figure 4.5: Mode of Travel by Passengers to Terminals in Sekondi-Takoradi

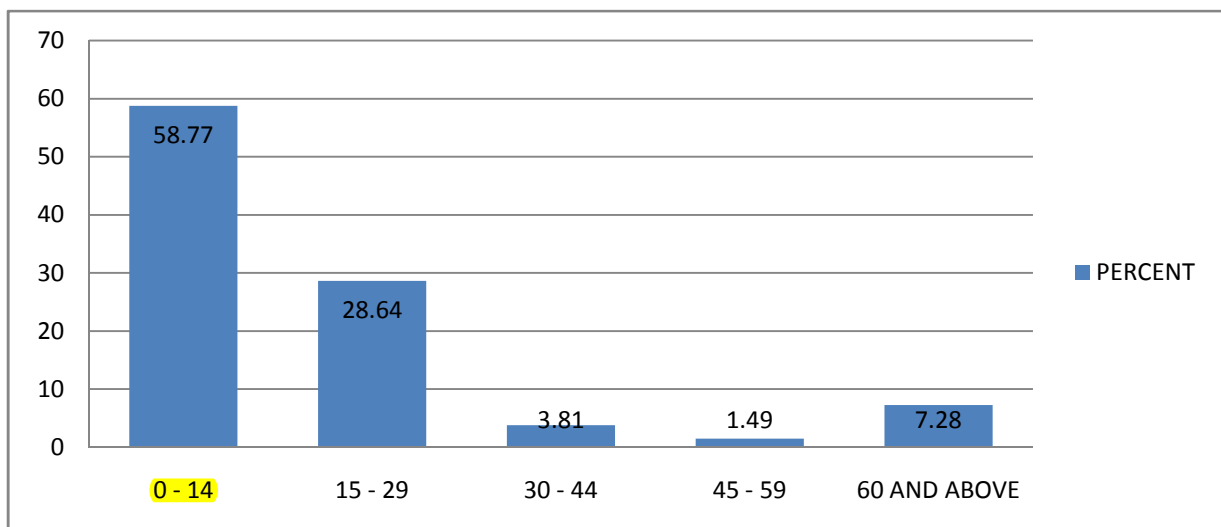


Figure 4.6: Journey Times to Terminals in Sekondi-Takoradi

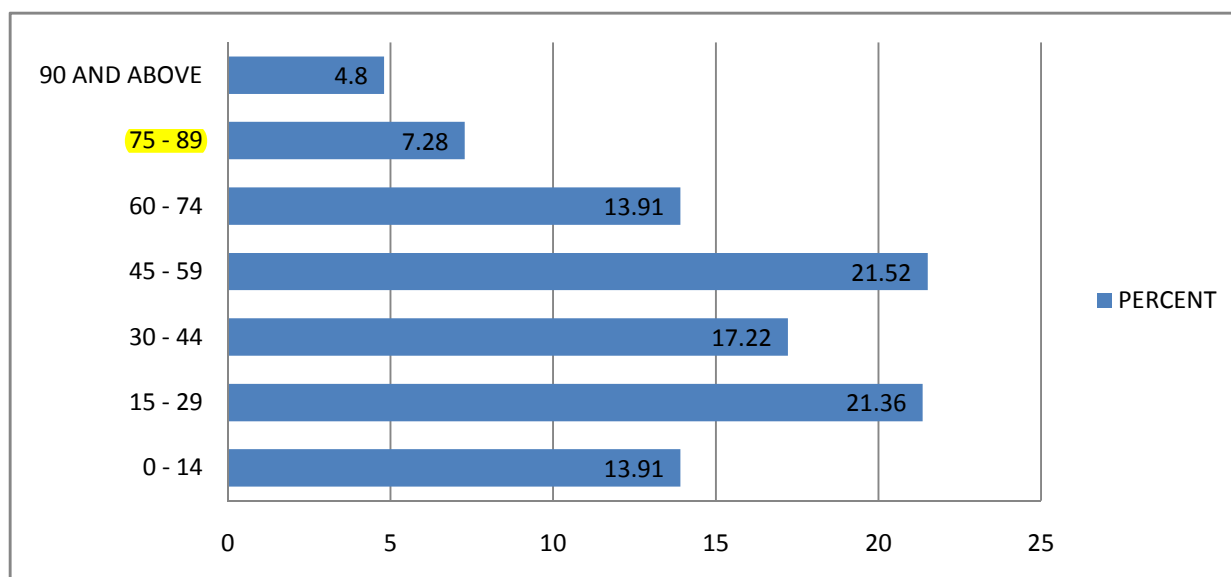


Figure 4.7: Waiting Times in Queues and Vehicles in Sekondi-Takoradi

5.0 CONCLUSIONS

1. Generally the traffic variation factors for the Manual Classified Stations in Sekondi-Takoradi did not differ very much from each other. Also the traffic patterns were similar in nature.
2. From the Screenline Count studies, Agona Nwanta recorded the highest 3hours peak traffic during the AM and PM periods with peak volume of 5286 vehs/hr and 6666 vehs/hr respectively.
3. The Intersection studies revealed that Sekondi road/ Takoradi Polytechnic junction had the highest peak hour volume of 4601 vehs/hr for the AM peak period whiles Sekondi By-pass/ Ntankoful road junction recorded the highest for the PM period with a value of 4244 vehs/hr.
4. From the parking studies in the Metropolis, Kintampo road had the most vehicles parked along it whiles Kitson road recorded the maximum parking during time of 122 minutes.
5. Ashanti road had the highest pedestrian AM hourly volume of 2861 ped/hr whiles the Ahanta road registered the highest pedestrian crossing hourly volume of 2662 ped/hr for the PM peak period.
6. The Market Circle Round About registered the highest CSI value of 65.74 minutes delay per kilometer travel for the AM peak period and 86.82 minutes delay per kilometer travel for the PM peak period. Lowest operation speed of 1.91km/hr and 1.21km/hr was recorded for both AM and PM peak periods at the same location.

264 7. The frequently used mode of transport by passengers in the city was by bus. The
265 highest average journey time to terminal was 0 – 15 minutes and the maximum
266 average waiting time in queues and vehicles was between 45 – 59 minutes.

267

268

6.0 RECOMMENDATIONS

269

270

271

272

273

274

275

276

277

278

279

280

281

282

283

284

285

286

287

288

289

290

291

292

293

294

295

7.0 References

296

297

298

299

300

301

302

303

304

305

306

307

308

309

310

311

312

313

314

- [1] Ahsan, HM. A Study of Mass Transit in Metropolitan Dhaka, M.Sc. Thesis, Department of Civil Engineering, BUET, Dhaka; 1990.
- [2] Ahmed KA. Traffic Problems in Dacca City, Local Government Institute, Dhaka; 1980.
- [3] Ahmed, SM, Hoque, MM. Transportation and Traffic in Dhaka- Review of the Past, Present and Outlook for the Future Proceedings, Seminar on Dhaka 2000 Ad, IEB; 1988.
- [4] Alam, J.B. Traffic Assignment Model for Simulation and Optimization of Road Network” M.Sc. Thesis, Department Of Civil Engineering, BUET, Dhaka; 1992.
- [5] Alam, J.B., Jaigirdar, M. A. Analysis of Behavioral Value of Travel Attributes and Their Implications on Urban Transport Policies, Journal of Civil Engineering, I.E.B., 1999; CE 27 – 1.
- [6] Ara, H. Socio-Economic Correlates of Urban Travel Pattern: A Study in Dhaka City. M.Sc. Thesis, URP, BUET; 1983.

- 315 [7] Banik, BK. Evaluation of Traffic Congestion in Sylhet city and a Development
316 of Mathematical Model. B.Sc. Engg. Thesis, Department of Civil and Environmental
317 Engineering, Shah Jalal University of Science and Technology, Sylhet, Bangladesh;
318 2005.
- 319 [8] Bartone, E; Branstein, J; Eigen, J. Urban Management Program toward
320 Environmental Strategies for Cities”, World Bank Technical Report; 1994.
- 321
- 322 [9] Barwell, I. Review of Appropriate Technologies for Road Transport in Bangladesh.
323 Bangladesh Planning Commission; 1978.
- 324
- 325 [10] Baquee, L. A Study of Traffic in Old Dacca City. An MURP. Thesis, Department of
326 Urban and Regional Planning, BUET; 1979.
- 327
- 328 [11] Burton, M.J. The Spirit and Purpose of Planning. First Edition. Hutchingson
329 & Co. London, U.K; 1974.
- 330
- 331 [12] Case, D.J., Latchford, JCR. A Comparison of Public Transport in Cities in
332 South East Asia. Study Report. World Bank; 1981.
- 333
- 334 [13] Eiselt, H. and Laporte, G. Arc routing problems, part ii the rural postman problem.
335 Operations Research, 1995; 43(3)(3):339 – 414.
- 336
- 337 [14] Firdous, G.M. A Study on the Problems of Bus Transport in Dhaka City. An
338 MURP Thesis, Department of Urban and Regional Planning, BUET, Dhaka; 1984.
- 339
- 340 [15] Francois, MI and Willis, A., Developing Effective Congestion Management
341 Systems. Federal Highway Administration, Technical Report. 1995; No.8, p.22.
- 342
- 343 [16] Habib, K.M.N. Evaluation of Planning Options to Alleviate Traffic Congestion in
344 Dhaka City M.Sc. Engg. Thesis. Department of Civil Engineering, BUET, Dhaka,
345 Bangladesh; 2002.
- 346
- 347 [17] Hafiz, KG. Urban Planning Strategies and Transport Programs in Dhaka
348 Metropolitan Areas.” Workshop on Urban Transport Development Strategy for
349 Dhaka Metropolitan Area, January, 2001, GDTPCB, Dhaka City Corporation,
350 Dhaka. 2001
- 351
- 352 [18] Hearty, M.J. Public Transport in Kingston, Jamaica and its Relation to Low
353 Income Households. TRRL Supplementary 1980; Report – 546.
- 354
- 355 [19] HGAC “Congestion Management System”, Houston-Galveston Area Council
356 (HGAC); 1998.
- 357
- 358 [20] Highway Capacity Manual (HCM), Special Report 209, Third Edition,
359 Transportation Research Board, National Research Council, Washington, D.C.;
360 1994.
- 361
- 362 [21] Lomax,T., Turner, S., Shunk, G., Levinson, H.S., Pratt, R.H., Bay, P.N., & Douglas,
363 G.B Quantifying Congestion. Final Report. National Cooperative Highway
364 Research Program, Transportation Research Board. 1997; 184.
- 365
- 366 [22] Mahama, F. Study of Vehicular Traffic Congestion in the Sekondi-Takoradi
367 Metropolis, MPhil Thesis, Department of Mathematics, KNUST, Ghana; 2012.

- 368
369 [23] Palma A. D., and Lindsey, R., Transportation: Supply and Congestion International
370 Encyclopedia of the Social and Behavioral Sciences, Elsevier Ltd. 2002; 15882-
371 15888.
372
373
374 [24] Quiroga, C.A., and Bullock, D., Travel Time Studies With Global Positioning and
375 Geographic Information Systems: An Integrated Methodology. In *Transportation*
376 *Research Part C6*, 1998; 101-127. Pergamon.
377
378 [25] Schwart, W.L., Suhrbier, J.H., Gardner, B.J., Data Collection and Analysis
379 Methods to support Congestion Management Systems. ASCE Transportation
380 Congress, Proceedings V.2, San Diego, CA, 1995; 2012-2023.
381
382 [26] Taylor, M. A.P., Woolley, J.E. and Zito, R. Integration of the global
383 positioning system and geographical information systems for traffic congestion
384 studies. In Thill J.C. (ed.) *Geographic Information Systems in Transportation*
385 *Research (1st ed)* Elsevier Science Limited, Amsterdam, The Netherlands;
386 2000.
387
388