British Journal of Mathematics & Computer Science
X(X): XX-XX, 20XX

SCIENCEDOMAIN *international*
www.sciencedomain.org

Optimal homotopy analysis methods for solving the linear and non-linear Fokker-Planck equations

Shreekant Pathak* **and Twinkle Singh**
Department of Applied Mathematics & Humanities,
S. V. National Institute of Technology,
Surat 395007,
India

Original Article

Received: XX December 20XX
Accepted: XX December 20XX
Online Ready: XX December 20XX

Abstract

In this paper, linear and non-linear Fokker-Planck equations are solved by approximate method, namely Optimal homotopy analysis method (OHAM). The Optimal homotopy analysis method is a combination of the homotopy analysis method and optimizing the convergence control parameter by minimizing the square residual error. The mathematical calculation and graphics have been obtained. The comparisons are made between the results of OHAM with the exact results and other approximate method like, Adomian decomposition method, Variation iteration method (VIM) and Homotopy perturbation method (HPM).

Keywords: Optimal homotopy analysis method; Convergence control parameter; Fokker-Planck equations
2010 Mathematics Subject Classification:35L02; 35L60

1 Introduction

Non-linear phenomena, that appear in many areas of scientific fields such as solid state physics, plasma physics, fluid mechanics, population models and chemical kinetics, can be modelled by non-linear differential equations. In many different fields of science and engineering, it is important to obtain exact or numerical solution of the non-linear partial differential equations, but it is still quite problematic that's need new methods for finding the approximate solutions. It is well-known that nonlinear ordinary differential equations (ODEs) and partial differential equations (PDEs) for boundary-value problems are much more difficult to solve than linear ODEs and PDEs, especially by means of analytic methods. Traditionally, perturbation and asymptotic techniques are widely applied to obtain analytic approximations of nonlinear problems in science, finance and engineering. Unfortunately, perturbation and asymptotic techniques are too strongly dependent upon small/large physical parameters in general, and thus are often valid only for weakly nonlinear problems. Thus, it is necessary to develop some analytic approximation methods, which are independent of any

Corresponding author: E-mail: sppathak.svnit@gmail.com

small/large physical parameters at all and besides valid for strongly nonlinear problems. The homotopy analysis method (HAM)[Abbasbandy and Shivanian (2011); Patel el. al. (2014); Liao (2012); Turkyilmazoglu (2010)] is based on the concept of homotopy, a fundamental concept in topology and differential geometry, which was first time introduced by Shijun Liao in his PhD thesis (1992)is independent of any small/large physical parameters. The HAM is a general analytic approach to get series solutions of various types of non-linear equations, including algebraic equations, ordinary differential equations, partial differential equations, differential-integral equations, differential-difference equation, and coupled equations of them. Researches have introduce many other methods based on HAM like, Homotopy perturbation method (HPM)[Biazar et. al. (2008); Chowdhury et. al. (2009)], Optimal homotopy analysis method (OHAM)[Liao (2012, 2010)] Optimal homotopy asymptotic method [Ullah et. al. (2013)], Spectral homotopy analysis method and Homotopy analysis transform method [Kumar (2014)] to get the approximate solution of the non-linear PDE.

Inspired and motivated by the ongoing research in this area, we apply approximate method, namely Optimal Homotopy analysis method (OHAM) for solving the non-linear Fokker plank equation arising in the fluid flow through porous media and compare with other approximate methods like, Adomian decomposition method [Adomian (1994); Tatari (2007)], Variation iteration method (VIM)[Sadighi et. al. (2007)] and Homotopy perturbation method (HPM)[Biazar et. al. (2008)].

2 Fokker-Planck equation

Using a microscope, Robert Brown (1773-1858) observed and documented the motion of large pollen grains suspended in water known as Brownian motion. The Fokker-Planck equation was first introduced by Fokker and Planck to describe the Brownian motion of particles [Risken (1996)]. A general Fokker-Planck equation can be derived from the Chapman-Kolmogorov equation. This equation has been used in different fields in natural sciences such as quantum optics, solid state physics, chemical physics, theoretical biology, circuit theory and fluid flow through porous media. The general form of Fokker-Plank equation is

$$\frac{\partial U}{\partial t} = \left[-\frac{\partial}{\partial x} A\left(x,t\right) + \frac{\partial^2}{\partial x^2} B\left(x,t\right) \right] U, \tag{2.1}$$

with initial condition $U\left(x,o\right) = f\left(x\right) \;\; ; \;\; x \in \mathbb{R}$. Equation (2.1) is also well known as a forward Kolmogorov equation. There exists another type of this equation is called a backward one as

$$\frac{\partial U}{\partial t} = \left[-A\left(x,t\right) \frac{\partial}{\partial x} + B\left(x,t\right) \frac{\partial^2}{\partial x^2} \right] U. \tag{2.2}$$

The non-linear Fokker-Planck equation is a more general form of linear one which has also been applied in plasma physics, surface physics, astrophysics, the physics of polymer fluids and particle beams, non-linear hydrodynamics, population dynamics, theory of electronic-circuitry and laser arrays, engineering, biophysics, human movement sciences, psychology and marketing. The non-linear form of the Fokker-Planck equation can be expressed in the following way

$$\frac{\partial U}{\partial t} = \left[-\frac{\partial}{\partial x} A\left(x,t,U\right) + \frac{\partial^2}{\partial x^2} B\left(x,t,U\right) \right] U. \tag{2.3}$$

3 Basic idea of OHAM

Consider the following non-linear partial differential equation in a general form

$$\mathcal{N}\left[U\left(x,\ t\right)\right] \ = \ 0, \tag{3.1}$$

where, $\mathcal{N}$ is a non-linear operator, x and t denote the independent variables and U is an unknown function. By means of the traditional HAM, we first construct the so-called zeroth order deformation equation as

$$(1-q)\,\mathcal{L}\left[\phi\left(x,t;q\right)-U_0\left(x,t\right)\right]=c_0\mathrm{q}\mathcal{N}\left[\phi\left(\mathrm{x},\mathrm{t};\mathrm{q}\right)\right], \tag{3.2}$$

where, $q\in[0,1]$ is the embedding parameter, c_0 is an auxiliary parameter also know as convergence control parameter, $\mathcal{L}$ is an auxiliary linear operator, $\phi\left(x,t;q\right)$ is an unknown function and $U_0(x,t)$ is an initial guess of $U(x,t)$. According to HAM we have great freedom to choose linear operator and initial guess. Obviously, when the embedding parameter $q=0$ and $q=1$, it holds $\phi\left(x,t;0\right)=U_0\left(x,t\right)$, $\phi\left(x,t;1\right)=U\left(x,t\right)$ respectively. Thus, as q increases from 0 to 1, the solution $\phi(x,t;q)$ varies from the initial guess $U_0(x,t)$ to the solution $U(x,t)$. Expanding $\phi(x,\ t;q)$ in Maclaurin series with respect to q, we have

$$\phi\left(x,t;q\right)=U_0\left(x,t\right)+\sum_{m=1}^{\infty}U_m\left(x,t\right)q^m, \tag{3.3}$$

where

$$U_m\left(x,t\right)=\frac{1}{m!}\frac{\partial^m\phi\left(x,t;q\right)}{\partial q^m}\bigg|_{q=0}.$$

Differentiating the equation (3.2) m-times with respect to q, dividing by $m!$ and finally setting $q=0$, we get the following mth-order deformation equation

$$\mathcal{L}\left[U_m\left(x,t\right)-\chi_m U_{m-1}\left(x,t\right)\right]=c_0\delta_m\left[U_{m-1}\left(x,t\right)\right], \tag{3.4}$$

where

$$\delta_m\left[U_{m-1}\left(x,t\right)\right]=\frac{1}{(m-1)!}\frac{\partial^{m-1}\mathcal{N}\left[\phi\left(x,t;q\right)\right]}{\partial q^{m-1}}\bigg|_{q=0}$$

and

$$\chi_m=\begin{cases}0, & m\leq 1\\ 1, & m>1\end{cases}$$

Applying inverse operator both side on equation (3.4)

$$U_m\left(x,t\right)=\chi_m U_{m-1}\left(x,t\right)+c_0\ \mathcal{L}^{-1}\left[\delta_m\left[U_{m-1}\left(x,t\right)\right]\right] \tag{3.5}$$

If the auxiliary linear operator [Baxter et. al. (2014)], the initial guess and the convergence control parameter c_0 are properly chosen, then the series (3.3) converges at $q=1$, then we have

$$U\left(x,t\right)=U_0\left(x,t\right)+\sum_{m=1}^{\infty}U_m\left(x,t\right), \tag{3.6}$$

which must be one of the solution of original non-linear equation (3.1), as proved by Liao [Liao (2012)]. The Convergence control parameter c_0 play an important role in the OHAM. One can gain convergent series solution simply by choosing a proper auxiliary parameter c_0. This is the reason why we call c_0 as the convergence-control parameter. In 2007, Yabushita et al. [Yabushita et. al. (2007)] applied the HAM to solve two coupled non-linear ODEs. They suggested the so-called "optimization method" to find out the optimal convergence-control parameters by means of the minimum of the squared residual of governing equation as follow

$$E_m\left(c_0\right)=\iint_{\Omega}\left[\mathcal{N}\left\{\sum_{n=0}^{m}U_n\left(x,t\right)\right\}\right]^2 d\Omega. \tag{3.7}$$

In real world problem the double integration of sum of square residual is very difficult, so we use it's approximate sum form as

$$E_m\left(c_0\right)=\frac{1}{\left(M+1\right)\left(N+1\right)}\sum_{i=0}^{M}\sum_{j=0}^{N}\left\{\mathcal{N}\left[\sum_{n=0}^{m}U_n\left(\frac{i}{M},\frac{j}{N}\right)\right]^2\right\}. \tag{3.8}$$

Equation(3.8) gives the square residual error at *m*th-order approximation. It is obvious that we can find the optimal value of convergence-control parameter c_0 at the any order of approximation. If there exists convergence-control parameter, c_0 for which we get the minimum of the squared residua E_m, is so called the optimal convergence-control parameter c_0.

4 Applications

We consider linear and non-linear Fokker-Plank equations, which arias in many problem of fluid flow through porous media such as, Pressure head in unsaturated soil during infiltration phenomenon, Boussinesq's equation for infiltration phenomenon in unsaturated porous media and Advection-diffusion equation for concentration distribution in fluid flow through porous media.

4.1 Example of Linear Fokker-Planck equation

Consider the following linear Fokker-Planck equation

$$\mathrm{U}_t = \mathrm{U}_x + \mathrm{U}_{xx}, \tag{4.1}$$

subject to the initial condition

$$\mathrm{U}\left(x, 0\right) = x. \tag{4.2}$$

According to the OHAM, we choose the initial guess as, $U_0\left(x,t\right) = x$, and the auxiliary linear operator

$$\mathcal{L}\left[U\left(x,t;q\right)\right] = \frac{\partial U\left(x,t;q\right)}{\partial t} - \frac{\partial U\left(x,t;q\right)}{\partial x}, \tag{4.3}$$

The zeroth order deformation equation is

$$\left(1-q\right)\mathcal{L}\left[\phi\left(x,t;q\right) - U_0\left(x,t\right)\right] = c_0 \mathrm{q} \mathcal{N}\left[\phi\left(\mathrm{x},\mathrm{t};\mathrm{q}\right)\right], \tag{4.4}$$

where the non-linear operator can be define as

$$\mathcal{N}\left[\phi\left(x,t;q\right)\right] = \frac{\partial \phi\left(x,t;q\right)}{\partial t} - \frac{\partial \phi\left(x,t;q\right)}{\partial x} - \frac{\partial^2 \phi\left(x,t;q\right)}{\partial x^2}.$$

The corresponding mth-order deformation equation is given by

$$\mathcal{L}\left[U_m\left(x,t\right) - \chi_m U_{m-1}\left(x,t\right)\right] = c_0 \delta_m\left[U_{m-1}\left(x,t\right)\right], \tag{4.5}$$

where

$$\delta_m\left(U_{m-1}\right) = \left(U_{m-1}\right)_t - \left(U_{m-1}\right)_x - \left(U_{m-1}\right)_{xx}.$$

Applying the inverse operator on equation (4.5), we have

$$U_m\left(x,t\right) = \chi_m U_{m-1}\left(x,t\right) + c_0 \mathcal{L}^{-1}\left[\delta_m\left[U_{m-1}\left(x,t\right)\right]\right] \tag{4.6}$$

Solving equation (4.6), for $m = 1, 2, 3...$ We obtain

$$\begin{aligned} U_1\left(x,t\right) &= -c_0 t, \\ U_2\left(x,t\right) &= -c_0\left(1+c_0\right)t, \\ U_3\left(x,t\right) &= -c_0\left(1+c_0\right)^2 t, \\ &\ldots \end{aligned} \tag{4.7}$$

By using Yabushita's approach we can find the optimal value of convergence control parameter by

$$E_m\left(c_0\right) = \frac{1}{\left(M+1\right)\left(N+1\right)} \sum_{i=0}^{M}\sum_{j=0}^{N}\left\{\mathcal{N}\left[\sum_{n=0}^{m} U_n\left(\frac{i}{M},\frac{j}{N}\right)\right]^2\right\}. \tag{4.8}$$

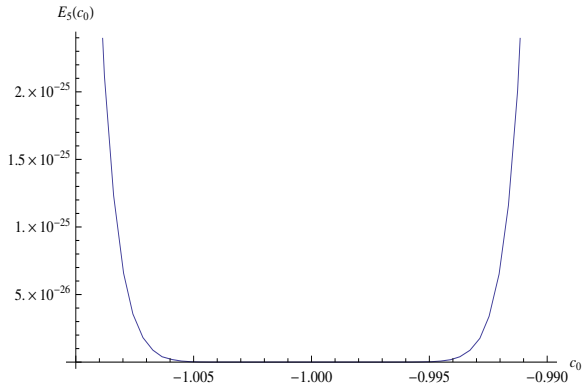

Figure 1: Square residual E_5 at 5th-order approximation

We calculate equation (4.8) for $M = 20$ & $N = 20$ numbers of points and we get the optimal value of convergence control parameter $c_0 = -1.0000249174897184$ at minimum square residual error $E_5 = 6.51E - 35$ (Figure 1).
By using this optimal value of c_0 we got the solution of (4.1) as

$$U(x,t) = \sum_{m=1}^{5} U_m(x,t) = x + t,$$

which is the exact solution and is same as obtained by ADM [Tatari (2007)], VIM [Sadighi et. al. (2007)] and HPM [Biazar et. al. (2008)].

4.2 Example of Non-linear Fokker-Planck equation

Consider the following non-linear Fokker-Planck equation

$$\frac{\partial U}{\partial t} = \frac{\partial}{\partial x}\left(\frac{xU}{3} - \frac{4}{x}U^2\right) + \frac{\partial^2}{\partial x^2}\left(U^2\right), \tag{4.9}$$

with the initial condition

$$\mathrm{U}(x,0) = x^2. \tag{4.10}$$

According to the OHAM, we choose the initial guess as $U_0(x,t) = x^2$, and the auxiliary linear operator

$$\mathcal{L}\left[U(x,t;q)\right] = \frac{\partial U(x,t;q)}{\partial t}, \tag{4.11}$$

The zeroth order deformation equation is

$$(1-q)\,\mathcal{L}\left[\phi(x,t;q) - U_0(x,t)\right] = c_0 \mathrm{q} \mathcal{N}\left[\phi(\mathrm{x},\mathrm{t};\mathrm{q})\right], \tag{4.12}$$

where the non-linear operator can be define as

$$\mathcal{N}\left[\phi(x,t;q)\right] = \frac{\partial \phi(x,t;q)}{\partial t} - \frac{\partial}{\partial x}\left(\frac{x\phi(x,t;q)}{3} - \frac{4}{x}\phi^2(x,t;q)\right) - \frac{\partial^2\left(\phi^2(x,t;q)\right)}{\partial x^2}.$$

The corresponding mth-order deformation equation is given by

$$\mathcal{L}\left[U_m(x,t) - \chi_m U_{m-1}(x,t)\right] = c_0 \delta_m\left[U_{m-1}(x,t)\right], \tag{4.13}$$

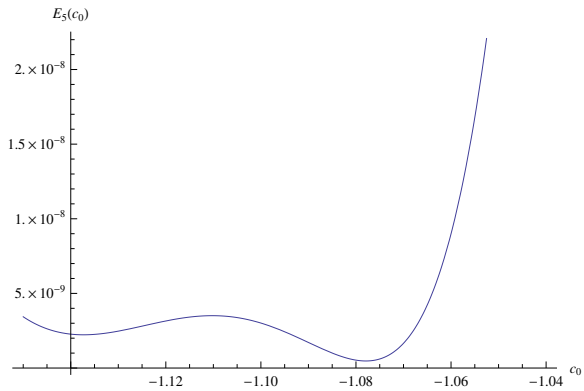

Figure 2: Square residual E_5 at 5th-order approximation

where

$$\delta_m\left(U_{m-1}\right)=\left(U_{m-1}\right)_t-\left(\frac{x}{3}U_{m-1}-\frac{4}{x}\sum_{r=0}^{m-1}U_rU_{m-1-r}\right)_x-\left(\sum_{r=0}^{m-1}U_rU_{m-1-r}\right)_{xx}.$$

Applying the inverse operator on equation (4.13), we have

$$U_m\left(x,t\right)=\chi_mU_{m-1}\left(x,t\right)+c_0\,\mathcal{L}^{-1}\left[\delta_m\left[U_{m-1}\left(x,t\right)\right]\right] \tag{4.14}$$

Solving equation (4.14), for $m=1,2,3...$, we get

$$\begin{aligned}&U_1\left(x,t\right)=-c_0x^2t,\\&U_2\left(x,t\right)=-c_0\left(1+c_0\right)x^2t+\tfrac{c_0^2x^2t^2}{2},\\&U_3\left(x,t\right)=-c_0\left(1+c_0\right)^2x^2t+\tfrac{c_0^2(1+c_0)x^2t^2}{2}-\tfrac{c_0^3x^2t^3}{6},\\&\quad\ldots\end{aligned} \tag{4.15}$$

By using Yabushita's approach we can find the optimal value of convergence control parameter by

$$E_m\left(c_0\right)=\frac{1}{\left(M+1\right)\left(N+1\right)}\sum_{i=0}^{M}\sum_{j=0}^{N}\left\{\mathcal{N}\left[\sum_{n=0}^{m}U_n\left(\frac{i}{M},\frac{j}{N}\right)\right]^2\right\}. \tag{4.16}$$

We calculate equation (4.16) for $M=20$ & $N=20$ numbers of points and we get the optimal value of convergence control parameter $c_0=-1.0779113454061617$ at minimum square residual error $E_5=4.73E-10$. By using this optimal value of c_0 we got the solution of (4.8) as

$$\begin{aligned}U\left(x,t\right)=\sum_{m=1}^{5}U_m\left(x,t\right)=&\left(1+t(1.0000028708038506+t(0.4999021407477205+t(0.16754988130644843\right.\\&\left.+(0.03871980496628806+0.012126458064182619t)t))))x^2,\end{aligned}$$

which is approximate solution of the exact solution x^2e^t, and is match with the solution obtained by ADM [Tatari (2007)], VIM [Sadighi et. al. (2007)] and HPM [Biazar et. al. (2008)].

5 Conclusion

The results have been obtained by using the OHAM which are presented here agree well with the results obtained by ADM, VIM and HPM. The advantage of OHAM is that we can rapidly converges

the series solution by taking optimal value of c_0, which is not possible in other analytic methods like ADM and VIM. Finally, we have concluded that the OHAM is very powerful and efficient analytical approximation method to solve such types of linear and non-linear partial differential equations arise in many problems of fluid flow through porous media and oil recovery processes.

Acknowledgment

The authors are thankful to the Department of Applied Mathematics and Humanities, S.V. National Institute of Technology, Surat, for providing research facilities.

References

Abbasbandy, S. and Shivanian, E. (2011). Predictor homotopy analysis method and its application to some non-linear problems, Communications in Non-linear Science and Numerical Simulation, 2011, Pages 2456-2468

Adomian, G. (1994). Solving Frontier Problems of Physics: The Decomposition Method, Kluwer Acad. Publ., Boston, 1994

Baxter, M., Van Gorder, R. A., & Vajravelu, K. (2014). On the choice of auxiliary linear operator in the optimal homotopy analysis of the Cahn-Hilliard initial value problem. Numerical Algorithms, 66(2), 269-298.

Biazar, J., Hosseini, K. and Gholamin, P. (2008). Homotopy perturbation method Fokker-Planck equation. In International Mathematical Forum, Pages 945-954.

Chowdhury, M.S.H., Hashim, I. and Abdulaziz, O. (2009). Comparison of homotopy analysis method and homotopy-perturbation method for purely non-linear fin-type problems, Communications in Nonlinear Science and Numerical Simulation, 2009, Pages 371-378.

Kumar, S., & Rashidi, M. M. (2014). New analytical method for gas dynamics equation arising in shock fronts. Computer Physics Communications, 185(7), 1947-1954.

Liao, S. (2012). Homotopy analysis method in non-linear differential equations, Heidelberg, New York, Higher Education Press, Beijing, Springer.

Liao, S. (2010). An optimal homotopy-analysis approach for strongly nonlinear differential equations, Communications in Non-linear Science and Numerical Simulation, Volume 15, Issue 8, August, Pages 2003-2016.

Patel, K., Mehta, M. and Singh, T. (2014). A solution of one-dimensional dispersion phenomenon by Homotopy Analysis Method. International Journal of Modern Engineering Research, Pages 421-428.

Risken, H. (1996). The Fokker-Planck equation: Methods and Applications, Springer-Verlag, 3ed.

Sadighi, A., Ganji, DD. and Sabzehmeidani, Y. (2007). A Study on Fokker-Planck Equation by Variational Iteration and Homotopy-Perturbation Methods. Int. J. Nonlinear Sci, Pages 92-102.

Tatari, M., Dehghan, M. and Razzaghi, M. (2007). Application of the Adomian decomposition method for the Fokker Planck equation. Mathematical and Computer Modelling,. 2007, Pages 639-650.

Turkyilmazoglu, M. (2010). Analytic approximate solutions of rotating disk boundary layer flow subject to a uniform suction or injection. International Journal of Mechanical Sciences, 52(12), 1735-1744.

Ullah, H., Islam, S., Idrees, M., & Arif, M. (2013). Solution of boundary layer problems with heat transfer by optimal homotopy asymptotic method. In Abstract and Applied Analysis. Hindawi Publishing Corporation.

Yabushita, K., Yamashita, M. and Tsuboi, K. (2007). An analytic solution of projectile motion with the quadratic resistance law using the homotopy analysis method. Journal of physics A, Pages 8403-8416.

©2011 Author1 & Author2; This is an Open Access article distributed under the terms of the Creative Commons Attribution License http://creativecommons.org/licenses/by/2.0, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.