

ABSTRACT This paper studies the effects of Reynolds number on the oscillating flow in convergent and divergent channels. The nonlinear equations governing the flow are solved analytically by the method of perturbation series solutions. Expressions for the velocities and wall shear stress are obtained and analyzed graphically. It is found that increase in the Reynolds number increases the velocities and wall shear stress. Similarly, it is seen that a flow separation occurs in the radial velocity flow structure.

Keywords: convergent and divergent channels, oscillatory flow, perturbation method,

1. INTRODUCTION

The artery which bears the most important and life- giving fluid in higher animal is infected by a number of diseases. This may account for why it seems the most research area of fluid dynamics. Amongst these diseases is the sclerosis of the artery, which involves the hardening of the artery due to deposition of lipids (a generic name for esters) on the arterial internal walls. The calcification of the lipids leads at the point of infection leads to lose of distensibility at such point. Also, the progressive encroachment of the plague on the internal walls tends to block the passage of blood to other parts of the body. This imposes extra load on the heart musculature. To maintain the peripheral flow, the heart enlarges itself, and thus, increasing the amplitude of the pulse or pressure wave. More so, the encroachment of the plague leads to distortion of the tapered geometry of the artery to other forms, such as the **idealized** locally constricted and peristaltic geometries.

[1] investigated the fluid mechanical aspect of the pulsatile flow of an incompressible fluid through a tapered tube, locally constricted and peristaltic channels. Their model did not consider the flow behavior in the regions before and after the peak of the stenosis height, which are idealized as the convergent and divergent channels. Therefore, we are motivated to examine the flow behaviour in these channels.

In part one of these studies, the effect of variations in the pressure wave amplitude and height of constriction on the flow structures of blood in the region before and after the critical height of the constriction, approximated by the convergent and divergent channels were examined. The study did not consider the effects of Reynolds number on the flow. Therefore, in this model the effects of Reynolds number on the flow are to be investigated.

Some work exists in literature on the study of arterial blood flow in general, and under diseased conditions, in particular. [2], [3], [4] and [5] studied the flow in locally constricted and peristaltic channels; [5] considered the pulsating flow of a Newtonian, and incompressible viscous fluid in channels of varying cross-section using the perturbation series expansion solutions which they developed, and observed that flow separation occurs in all geometries. [6] solved the Navier–Stokes and the energy equations by the method of finite difference, and developed an asymptotic series for the dynamic and thermal quantities. Their model shows the existence of an annular effect in the entry region for the pulsatile part of the velocity and temperature; [7] solved the Navier–Stokes and energy equations numerically for the laminar pulsating flow in a channel, and concluded that an appreciable heat transfer enhancement occurs in the channel. Furthermore, [8] examined the influence of heat and chemical reactions on blood flow through an anisotropically tapered and elastic artery with overlapping stenosis, and found among others, that the coupling number, tapering angle, maximum height of stenosis, the Sorret number, Brinkman number tend to increase the axial velocity higher for the Newtonian fluid than for the micro-polar fluid. Even so, [9] considered the MHD flow of an incompressible viscous fluid through convergent and divergent channels using the homotopy perturbation method and noticed

that the behaviour of the homotopy perturbation method is in good agreement with the numerical simulations.

This paper presents an analytic model on the effect of Reynolds number on the velocity and wall shear stress structures of the oscillatory flow in convergent and divergent tubes.

The paper is organized in the following format: section 2 gives the methodology; section 3 holds the results and discussion, while section 4 presents the conclusions.

2. METHODOLOGY

The problem examined the flow of blood in axisymmetric convergent and divergent channels. These channels approximate the region before and after the critical point of the constriction caused by the stenosis of the artery. Due to the plaque, the region of the artery affected becomes rigid and therefore, loses its distensibility. Let (R, θ, X) and (u, v, w) be the polar cylindrical orthogonal coordinates and vector components, respectively, and assuming the flow is symmetrical about the θ -axis, then for a two-dimensional situation, the coordinates and vector components are reduced to $(R, 0, X)$ and $(u, 0, w)$ respectively, such that the continuity, momentum and energy equations governing the flow become:

$$\frac{1}{R} \frac{\partial u}{\partial R} + \frac{\partial u}{\partial R} + \frac{\partial u}{\partial X} = 0 \quad (1)$$

$$\frac{\partial u}{\partial t} + u \frac{\partial u}{\partial R} + w \frac{\partial u}{\partial X} = -\frac{\partial p}{\partial R} + \nu \left(\frac{\partial^2 u}{\partial R^2} + \frac{1}{R} \frac{\partial u}{\partial R} - \frac{u}{R^2} + \frac{\partial^2 u}{\partial X^2} \right) \quad (2)$$

$$\frac{\partial w}{\partial t} + u \frac{\partial w}{\partial R} + w \frac{\partial w}{\partial X} = -\frac{1}{\rho} \frac{\partial p}{\partial X} + \nu \left(\frac{\partial^2 w}{\partial R^2} + \frac{1}{R} \frac{\partial w}{\partial R} + \frac{\partial^2 w}{\partial X^2} \right) \quad (3)$$

where ρ the density, p the pressure, ν the kinematic viscosity of the fluid, and t is the time. $R=0$ is the centre or symmetric axis of the tube; $R = a_o(X, t)$, which is an arbitrary function of X and t is the cross-sectional radius of the tube; a_o is the characteristic radius of the tube, and t is the time.

The boundary conditions are:

$$(i) \quad w = 0, \quad \frac{\partial u}{\partial R} = 0 \quad \text{at } R=0 \quad (4)$$

(ii) by the no-slip condition at the wall of the tube

$$u(a_o, t) = 0 \quad \text{at } R = a_o(X, t) \quad (5)$$

(iii) the flux across a cross-section of the tube is prescribed as:

$$\int_0^{a_o(X, t)} dR \int_0^{2\pi} R u d\theta = 2 \pi \psi_o (1 + k e^{i\beta t}) \quad (6)$$

where ψ_o is a constant, k is the amplitude of the pulse which is assumed to be small, and β is the frequency of oscillation.

To eliminate the pressure terms in equations (2) and (3) we take the partial derivatives of equations (2) and (3) with respect to R and X respectively, then subtracting the first result from the second one, we have

$$\frac{\partial}{\partial t} \left(\frac{\partial u}{\partial R} - \frac{\partial w}{\partial X} \right) + \frac{\partial u}{\partial X} \left(\frac{\partial u}{\partial R} - \frac{\partial w}{\partial X} \right) + \frac{\partial w}{\partial R} \left(\frac{\partial u}{\partial R} - \frac{\partial w}{\partial X} \right) =$$

$$v \left[\frac{\partial^2}{\partial X^2} \left(\frac{\partial u}{\partial R} - \frac{\partial w}{\partial X} \right) + \frac{\partial^2}{\partial R^2} \left(\frac{\partial u}{\partial R} - \frac{\partial w}{\partial X} \right) + \frac{1}{R} \frac{\partial}{\partial R} \left(\frac{\partial u}{\partial R} - \frac{\partial w}{\partial X} \right) - \frac{1}{R^2} \left(\frac{\partial u}{\partial R} - \frac{\partial w}{\partial X} \right) \right] \quad (7)$$

Also, the pressure expression in the axial direction can be obtained from equation (3), as

$$\frac{\partial p}{\partial X} = v \left(\frac{\partial^2 w}{\partial R^2} + \frac{1}{R} \frac{\partial w}{\partial R^2} + \frac{\partial^2 w}{\partial X^2} \right) - \left(\frac{\partial w}{\partial t} + u \frac{\partial w}{\partial R} + w \frac{\partial w}{\partial X} \right) \quad (8)$$

Introducing the stream function ψ , vorticity Ω , and non-dimensionalized variables, respectively, into equations (7) and (8), we have

$$u = -\frac{1}{r} \frac{\partial \phi}{\partial r} \quad (9)$$

$$w = -\frac{1}{r} \frac{\partial \phi}{\partial x} \quad (10)$$

$$\omega = \frac{1}{r} \frac{\partial^2 \phi}{\partial r^2} - \frac{1}{r^2} \frac{\partial \phi}{\partial r} \quad (11)$$

$$\eta \frac{\partial \omega}{\partial T} + \frac{\text{Re}}{r} \varepsilon \left(\frac{\partial \omega}{\partial r} \frac{\partial \phi}{\partial x} + \frac{\partial \omega}{\partial x} \frac{\partial \phi}{\partial r} + \frac{\omega}{r} \frac{\partial \phi}{\partial x} \right) = \frac{1}{r^2} \frac{\partial^2 \omega}{\partial r^2} + \frac{1}{r} \frac{\partial \omega}{\partial r} - \frac{1}{r} \omega \quad (12)$$

$$\frac{\partial p}{\partial X} = -\frac{\text{Re}}{\varepsilon} \left(-\frac{1}{r} \frac{\partial^3 \phi}{\partial r^3} + \frac{1}{r^2} \frac{\partial^2 \phi}{\partial r^2} \right) + \frac{\eta}{\varepsilon} \frac{\partial^2 \phi}{\partial r \partial T} \quad (13)$$

Equation (13) shows that the pressure field is of order $\frac{1}{\varepsilon}$. Also, the $O(\varepsilon)^2$ terms are neglected for being small.

Furthermore, the wall shear stress is expressed as

$$\tau_w = \rho \nu \Omega \quad (\text{see [5]}) \text{ giving us}$$

$$\tau_w = \frac{1}{r} \frac{\partial^2 \phi}{\partial r^2} + \frac{1}{r^2} \frac{\partial \phi}{\partial r} \quad (14)$$

The boundary conditions become:

$$\phi = 0, \quad \frac{\partial \phi}{\partial x} = 0, \quad \frac{\partial}{\partial r} \left(\frac{1}{r} \frac{\partial \phi}{\partial r} \right) = 0 \quad \text{at } r = 0 \quad (15)$$

$$\phi = 1 + k e^{iT}, \quad \frac{\partial \phi}{\partial r} = 0 \quad \text{at } r = s(x, T) \quad (16)$$

where

$$u = -\frac{1}{R} \frac{\partial \psi}{\partial R}, \quad w = \frac{1}{R} \frac{\partial \psi}{\partial X} \quad (17)$$

$$\Omega = \frac{\partial u}{\partial R} - \frac{\partial w}{\partial X} = \frac{1}{R} \frac{\partial^2 \psi}{\partial R^2} - \frac{1}{R^2} \frac{\partial \psi}{\partial R} + \frac{1}{R} \frac{\partial^2 \psi}{\partial X^2} \quad (18)$$

are the stream functions and vortices terms, and

$$r = \frac{R}{a_o}, \quad x = \varepsilon \frac{X}{a_o}, \quad T = \beta t, \quad \phi(r, x, T) = \frac{\psi}{\psi_o},$$

$$\omega(r, x, T) = \frac{\Omega a_o^3}{\psi_o}, \text{Re} = \frac{\psi_o}{a_o v}, \eta = \frac{\beta}{a_o^2 v}, a_o = \frac{a}{s}$$

are the non-dimensionalized variables, where Re is the Reynolds number of the flow, η is a dimensionless number for the frequency of oscillation, T is the dimensionless time, ε is the height of constriction, ϕ , ω are the dimensionless stream function and vorticity, respectively. Also, we assume that the cross-section of the tube in the model vary in the axial direction, and for which we take $a(X, t) = a_o s(\varepsilon X/a_o, t)$, $r = R_0(1 + \varepsilon f(x, t))$, $0 \leq r \leq 1$, $0 \leq x \leq 1$ where s is an arbitrary function of X;

a is the variation in the r along the axial direction; $0 < \varepsilon = \frac{a_o}{L} \ll 1$ is a small dimensionless parameter that characterizes the slow variation in the channel radius; L defines the channel characteristic length. $\varepsilon = 0$ corresponds to a tube with constant radius. As ε increases from zero the variation of ψ in the axial direction depends upon εX instead of X.

We shall seek for perturbation series solutions about the small parameter ε of the form:

$$f = f^{(0)} + k e^{iT} \bar{f}^{(0)} + \varepsilon \left(f^{(1)} + k e^{iT} \bar{f}^{(1)} \right) + \dots \quad (19)$$

where f_n represents ω and ϕ . This enables us to linearize the problems and make them tractable.

Therefore, substituting equation (19) into equations (11), (12), (15) and (16), we have the zeroth order terms as

$$\omega^{(0)} = \frac{1}{r} \left(\frac{\partial^2 \phi^{(0)}}{\partial r^2} - \frac{1}{r} \frac{\partial \phi^{(0)}}{\partial r} \right) \quad (20)$$

$$\omega^{(0)} = \frac{1}{r} \left(\frac{\partial^2 \bar{\phi}^{(0)}}{\partial r^2} + \frac{1}{r} \frac{\partial \bar{\phi}^{(0)}}{\partial r} \right) \quad (21)$$

$$\frac{\partial^2 \omega^{(0)}}{\partial r^2} + \frac{1}{r} \frac{\partial \omega^{(0)}}{\partial r} - \frac{1}{r^2} \omega^{(0)} = 0 \quad (22)$$

$$\frac{\partial^2 \bar{\omega}^{(0)}}{\partial r^2} + \frac{1}{r} \frac{\partial \bar{\omega}^{(0)}}{\partial r} - \left(\lambda^2 + \frac{1}{r} \right) \bar{\omega}^{(0)} = 0 \quad (23)$$

where $\lambda^2 = i\eta$

with the boundary conditions

$$\left. \begin{aligned} \phi^{(0)} = \bar{\phi}^{(0)} = 0 \\ \frac{1}{r} \frac{\partial \phi^{(0)}}{\partial x} = \frac{1}{r} \frac{\partial \bar{\phi}^{(0)}}{\partial x} = 0 \\ \frac{\partial}{\partial r} \left(\frac{1}{r} \frac{\partial \phi^{(0)}}{\partial r} \right) = \frac{\partial}{\partial r} \left(\frac{1}{r} \frac{\partial \bar{\phi}^{(0)}}{\partial r} \right) = 0 \end{aligned} \right\} \text{ at } r = 0 \quad (24)$$

$$\left. \begin{aligned} \frac{\partial \phi^{(0)}}{\partial r} &= \frac{\partial \bar{\phi}^{(0)}}{\partial r} = 0 \\ \phi^{(0)} &= \bar{\phi}^{(0)} = 1 \end{aligned} \right\} \quad \text{at } r = s \quad (25)$$

141 and the first order terms

$$\omega^{(1)} = \frac{1}{r} \left(\frac{\partial^2 \phi^{(1)}}{\partial r^2} - \frac{1}{r} \frac{\partial \phi^{(1)}}{\partial r} \right) \quad (26)$$

$$\varpi^{(1)} = \frac{1}{r} \left(\frac{\partial^2 \bar{\phi}^{(1)}}{\partial r^2} - \frac{1}{r} \frac{\partial \bar{\phi}^{(1)}}{\partial r} \right) \quad (27)$$

$$\frac{\partial^2 \omega^{(1)}}{\partial r^2} + \frac{1}{r} \frac{\partial \omega^{(1)}}{\partial r} - \frac{1}{r} \omega^{(1)} = \frac{\text{Re}}{r} \left[\frac{\partial \phi^{(0)}}{\partial r} \frac{\partial \omega^{(0)}}{\partial x} + \frac{\partial \phi^{(0)}}{\partial x} \left(\frac{\omega^{(0)}}{r} - \frac{\partial \omega^{(0)}}{\partial r} \right) \right] \quad (28)$$

$$\begin{aligned} \frac{\partial^2 \varpi^{(1)}}{\partial r^2} + \frac{1}{r} \frac{\partial \varpi^{(1)}}{\partial r} - \left(\lambda^2 + \frac{1}{r^2} \right) \varpi^{(1)} &= \frac{\text{Re}}{r} \left[\frac{\partial \phi^{(0)}}{\partial r} \frac{\partial \omega^{(0)}}{\partial x} + \frac{\partial \bar{\phi}^{(0)}}{\partial r} \frac{\partial \omega^{(0)}}{\partial x} \right. \\ &\quad \left. - \frac{\partial \varpi^{(0)}}{\partial x} \left(\frac{\partial \omega^{(0)}}{\partial r} - \frac{\varpi^{(0)}}{r} \right) - \frac{\partial \bar{\phi}^{(0)}}{\partial x} \left(\frac{\partial \omega^{(0)}}{\partial r} - \frac{\omega^{(0)}}{r} \right) \right] \quad (29) \end{aligned}$$

147 with boundary conditions

$$\left. \begin{aligned} \phi^{(1)} &= \bar{\phi}^{(1)} = 0 \\ \frac{1}{r} \frac{\partial \phi^{(1)}}{\partial x} &= \frac{1}{r} \frac{\partial \bar{\phi}^{(1)}}{\partial x} = 0 \\ \frac{\partial}{\partial r} \left(\frac{1}{r} \frac{\partial \phi^{(1)}}{\partial r} \right) &= \frac{\partial}{\partial r} \left(\frac{1}{r} \frac{\partial \bar{\phi}^{(1)}}{\partial r} \right) = 0 \end{aligned} \right\} \quad \text{at } r = 0 \quad (30)$$

$$\left. \begin{aligned} \frac{\partial \phi^{(1)}}{\partial r} &= \frac{\partial \bar{\phi}^{(1)}}{\partial r} = 0 \\ \phi^{(1)} &= \bar{\phi}^{(1)} = 0 \end{aligned} \right\} \quad \text{at } r = s \quad (31)$$

150 Furthermore, by equation (19), equations (9), (10), (13) and (14) become

$$u = -\frac{1}{r} \frac{\partial \phi}{\partial r} = -\frac{1}{r} \frac{\partial}{\partial r} \left(\phi^{(0)} + k e^{iT} \phi^{(0)} + \varepsilon \phi^{(1)} + \varepsilon k e^{It} \phi^{(1)} \right) \quad (32)$$

$$w = \frac{1}{r} \frac{\partial \phi}{\partial x} = \frac{1}{r} \frac{\partial s}{\partial x} \cdot \frac{\partial \phi}{\partial s} = \frac{1}{r} \frac{\partial s}{\partial x} \cdot \frac{\partial}{\partial s} \left(\phi^{(0)} + k e^{iT} \phi^{(0)} + \varepsilon \phi^{(1)} + \varepsilon k e^{It} \phi^{(1)} \right) \quad (33)$$

$$\frac{\partial p}{\partial x} = -\frac{\text{Re}}{\varepsilon} \left[-\frac{1}{r} \frac{\partial^3 \phi^{(o)}}{\partial r^3} + \frac{1}{r^2} \frac{\partial^2 \phi^{(o)}}{\partial r^2} + k e^{iT} \left(-\frac{1}{r} \frac{\partial^3 \bar{\phi}^{(o)}}{\partial r^3} + \frac{1}{r^2} \frac{\partial^2 \bar{\phi}^{(o)}}{\partial r^2} \right) \right] \quad (34)$$

$$\begin{aligned} \tau_w = & -\left(\frac{1}{r} \frac{\partial^2 \phi^{(o)}}{\partial r^2} + \frac{1}{r^2} \frac{\partial \phi^{(o)}}{\partial r} \right) - k e^{iT} \left(\frac{1}{r} \frac{\partial^2 \bar{\phi}^{(o)}}{\partial r^2} + \frac{1}{r^2} \frac{\partial \bar{\phi}^{(o)}}{\partial r} \right) \\ & - \varepsilon \left(\frac{1}{r} \frac{\partial^2 \phi^{(1)}}{\partial r^2} + \frac{1}{r^2} \frac{\partial \phi^{(1)}}{\partial r} \right) - \varepsilon k e^{iT} \left(\frac{1}{r} \frac{\partial^2 \bar{\phi}^{(1)}}{\partial r^2} + \frac{1}{r^2} \frac{\partial \bar{\phi}^{(1)}}{\partial r} \right) \end{aligned} \quad (35)$$

The analyses show that the non-steady parts of the solutions are very negligible.

The solutions of equations (20) - (35) are

$$\phi^{(o)} = 2 \left(\frac{r}{s} \right)^2 - \left(\frac{r}{s} \right)^4 \quad (36)$$

$$\bar{\phi}^{(o)} = \frac{r^2}{\lambda s^2 I_2(\lambda s)} [I_o(\lambda s) - I_o(\lambda r) + I_2(\lambda r)] \quad (37)$$

$$\omega^o = -\frac{8}{s^3} \left(\frac{r}{s} \right) \quad (38)$$

$$\bar{\omega}^{(o)} = -2 \frac{\lambda I_1(\lambda r)}{s^2 I_2(\lambda s)} \quad (39)$$

$$\phi^{(1)} = -\frac{\text{Re}}{s} \frac{\partial s \varepsilon}{\partial x} \left[\frac{1}{9} \left(\frac{r}{s} \right)^8 - \frac{2}{3} \left(\frac{r}{s} \right)^6 + \left(\frac{r}{s} \right)^4 - \frac{4}{9} \left(\frac{r}{s} \right)^2 \right] \quad (40)$$

$$\begin{aligned} \bar{\phi}^{(1)} = & \frac{4 \text{Re}}{\lambda^4 s^4} \frac{\partial s}{\partial x} \left\{ \frac{I_1(\lambda r)}{s \lambda^2 I_2(\lambda s)} \left[\left(\frac{2}{3} s^4 \lambda^4 - 5 s^2 \lambda^2 - 32 \right) \lambda I_1^2(\lambda s) \right. \right. \\ & + \left(\frac{1}{2} s^2 \lambda^2 + 16 \right) \lambda^2 s I_o(\lambda s) I_1(\lambda s) + \left(\frac{2}{3} \lambda^4 s^4 + 12 \lambda^2 s^2 - 128 \right) \frac{I_1(\lambda s)}{s} \\ & \left. \left. + \left(64 - 6 \lambda^2 s^2 - \frac{1}{4} \lambda^4 s^4 \right) \lambda I_o(\lambda s) \right] \right\} \end{aligned} \quad (41)$$

$$\omega^{(1)} = \frac{8 \text{Re}}{s^4} \frac{\partial s}{\partial x} \left[\frac{2}{3} \left(\frac{r}{s} \right)^5 - 2 \left(\frac{r}{s} \right)^3 + \left(\frac{r}{s} \right) \right] \quad (42)$$

$$\begin{aligned} \bar{\omega}^{(1)} = & 4 \frac{\text{Re}}{\lambda^4 s^4} \frac{\partial s}{\partial x} \left\{ \frac{1}{\lambda^2 I_2(\lambda s)} \left[\left(\frac{2 s^4 \lambda^4}{3} - 5 s^2 \lambda^2 - 32 \right) \lambda I_1^2(\lambda s) \right] \right. \\ & \left. + \left[I_o(\lambda r) \left(\lambda s^2 r - \frac{\lambda r^2}{3} \right) I_1(\lambda s) - \frac{r^3}{s} + 2 s r \right] \right\} \end{aligned} \quad (43)$$

$$\begin{aligned}
174 \quad u &= -\frac{4}{s^2} + \frac{4r^2}{s^4} - \frac{ke^{iT}}{\lambda s^2 I_2(\lambda s)} 2(I_o(\lambda s) - I_o(\lambda r) + \lambda r I_1(\lambda r)) \\
175 \quad &+ \frac{\varepsilon \operatorname{Re}}{s^3} \frac{\partial s}{\partial x} \left[\frac{8}{9} \left(\frac{r}{s} \right)^6 - 4 \left(\frac{r}{s} \right)^4 + 4 \left(\frac{r}{s} \right)^2 - 18 \right] \\
176 \quad &+ \frac{\varepsilon ke^{iT}}{r \lambda^4 s^6 I_2(\lambda s)} 4 \operatorname{Re} \frac{\partial s}{\partial x} \left\{ \frac{I_o(\lambda r)}{s \lambda I_2(\lambda s)} \left[\begin{aligned} &\left(\frac{2}{3} s^4 \lambda^4 - s^5 \lambda^2 - 32 \right) \lambda I_1^2(\lambda s) \\ &+ \left(\frac{1}{2} s^2 \lambda^2 + 16 \right) \lambda^2 s I_o(\lambda s) \\ &+ \left(\frac{3}{2} s^4 \lambda^4 - 12 s^2 \lambda^2 - 128 \right) \frac{I_1(\lambda s)}{s} \\ &+ \left(64 - 6 s^2 \lambda^2 - \frac{1}{4} s^4 \lambda^4 \right) I_o(\lambda s) \end{aligned} \right] \right. \\
&\quad \left. + \lambda^4 r^2 \left(\frac{3}{2} s^2 - \frac{8}{\lambda^2} \right) I_1(\lambda r) I_1(\lambda s) - \frac{4}{3} \lambda^3 r^2 I_o(\lambda r) I_1(\lambda s) + \dots \right\} \quad (44)
\end{aligned}$$

$$\begin{aligned}
177 \quad w &= \left(4 \frac{r^3}{s^5} - 2 \frac{r}{s^3} \right) \frac{\partial s}{\partial x} \\
178 \quad &- \frac{ke^{iT} r}{s I_2^2(\lambda s)} \frac{\partial s}{\partial x} [I_o(\lambda s) I_1(\lambda s) - I_1(\lambda s) I_o(\lambda r) + I_1(\lambda s) I_2(\lambda r)] \\
179 \quad &+ \varepsilon \frac{\operatorname{Re}}{s^3} \left(\frac{\partial s}{\partial x} \right)^2 \left[\left(\frac{r}{s} \right)^7 - \frac{14}{3} \left(\frac{r}{s} \right)^5 + 5 \left(\frac{r}{s} \right)^3 - 27 \left(\frac{r}{s} \right) \right] \\
180 \quad &+ \varepsilon ke^{iT} \left\{ \frac{4 \operatorname{Re}}{r \lambda^6} I_2(\lambda r) \frac{\partial s}{\partial x} \left[\begin{aligned} &\frac{2}{3} \lambda^6 \left(2 s^3 I_o(\lambda s) I_1(\lambda s) I_2^2(\lambda s) + \frac{s^2}{\lambda} (I_1^2(\lambda s) I_2^2(\lambda s)) \right) \\ &- 5 \lambda^4 \left(2 s^5 I_o(\lambda s) I_1(\lambda s) I_2^2(\lambda s) - \frac{s^4}{\lambda} I_1^2(\lambda s) I_2^2(\lambda s) \right) \\ &- 32 \lambda^2 \left(2 s^7 I_o(\lambda s) I_1(\lambda s) I_2^2(\lambda s) - 3 \frac{s^6}{\lambda} I_1^2(\lambda s) I_2^2(\lambda s) \right) \end{aligned} \right] \right. \\
181 \quad &\quad \left. + \frac{4 \operatorname{Re} r}{s 4 I_2^2(\lambda s)} I_2(\lambda r) \frac{\partial s}{\partial x} \left[\begin{aligned} &I_o(\lambda s) - \frac{4}{3 s^2} \left(I_o(\lambda s) - \frac{2 I_1(\lambda s)}{\lambda s} \right) \\ &- \frac{8}{\lambda^2 s^2} \left(I_o(\lambda s) - \frac{2 I_1(\lambda s)}{\lambda s} \right) \end{aligned} \right] \right\} \quad (45) \\
182 \quad & \\
183 \quad &
\end{aligned}$$

184

$$p = \frac{1}{\varepsilon} \left[\frac{36x}{s^4} - \frac{ke^{iT}x}{s^2 I_2(\lambda r)} \left[\frac{10}{r} I_1(\lambda r) + 7\lambda r I_0(\lambda r) - (\lambda^2 r + \lambda^2 r^2) I_1(\lambda r) \right] \right], \quad 0 \leq x \leq 1 \quad (46)$$

185

$$\tau_w = \frac{8}{s^2} - \frac{ke^{iT}x}{s^2 I_2(\lambda s)} (\lambda s^2 I_0(\lambda s) + 4s I_1(\lambda s)) + \varepsilon \frac{8}{3s^3} \operatorname{Re} \frac{\partial s}{\partial x} +$$

186

$$\frac{\varepsilon ke^{iT}}{\lambda^4 s^6 I_2(\lambda r)} \operatorname{Re} \frac{\partial s}{\partial x} \left\{ \frac{I_1(\lambda s)}{s^2 I_2(\lambda s)} \left[\begin{aligned} & \left(\frac{2}{3} s^4 \lambda^4 - s^2 \lambda^2 - 32 \right) I_1^2(\lambda s) \\ & + \left(\frac{1}{2} s^2 \lambda^2 + 16 \right) \lambda^2 s I_0(\lambda s) I_1(\lambda s) \\ & \left(\frac{3}{2} s^4 \lambda^4 - 12 s^2 \lambda^2 - 128 \right) \frac{I_1(\lambda s)}{s} \\ & + \left(64 - 6 s^2 \lambda^2 - \frac{1}{4} s^4 \lambda^4 \right) I_0(\lambda s) \end{aligned} \right] \right. \\ \left. + \lambda^4 \left(\frac{4s}{3} - 6s^3 + \frac{32s}{\lambda^2} \right) I_1^2(\lambda s) \right\} \quad (47)$$

187 where $I_0(\lambda r)$, $I_1(\lambda r)$, $I_2(\lambda r)$, $I_0(\lambda s)$, $I_1(\lambda s)$ and $I_2(\lambda s)$ are the modified Bessel function of order zero, one and
 188 two, respectively.

189

190 Similarly, the geometries under consideration are: the convergent channel $s = e^{-x/2}$, and divergent
 191 channel $s = e^{x/2}$

192

193 3. RESULTS AND DISCUSSION

194

195 The effects of Reynolds number on the flow behaviour of blood in the regions before and after the stenosis
 196 critical height, and which are approximated as convergent and divergent channels as shown in Fig 1 of
 197 part one of these studies are considered. The problem shows that the flow structure depends on variation
 198 in the Reynolds number. For this, Fig 1 – Fig 6 show the computational results for the velocities and wall
 199 shear stress for various values of Reynolds number and constant values of other parameters, using
 200 **Mathematica computational software**. For realistic values of $T=\pi/4$, $\lambda=2$, $k=0.03$, $\varepsilon=0.05$, $\operatorname{Re} 10, 100,$
 201 $500, 1000$ the profiles show that the increase in the Reynolds number produces a commensurate
 202 increase in the velocities and wall shear stress.

203

204 In the regions before the plaque, that is, in the upstream, the flow is laminar, Poiseuille and fully
 205 developed. Therefore, the Reynolds number is moderate. But towards the peak of the constriction, that is,
 206 in the convergent channel whose geometry narrows down exponentially, the inertial force rises such that
 207 the Reynolds number and the momentum increase. On the other hand, in the divergent channel whose
 208 geometry widens away exponentially from the peak, the inertial force must drop. This must be followed by
 209 a drop in the Reynolds number and momentum, and subsequently the velocities and other factors of the
 210 flow must drop. This is supposed to be the case in the divergent channel. Therefore, the increase in the
 211 velocities and wall shear stress in the divergent channel, possibly, could be due to the influence of the
 212 flow situations in the convergent region on it. And, these account for the observations noticed in Fig.1 –
 213 Fig 6.

214

215 Furthermore, a flow separation is seen in the radial velocity flow structure at $r \leq 0.3$ in both convergent
 216 and divergent regions (see Fig 2 and Fig 3). This is in consonance with [1], which showed that separation
 217 virtually occurs in the flow. The occurrence of this special feature at such point could be due to adverse
 218 flow conditions there. According to [1], the flow separation is due to the viscous effects at such point. And,

until the point $r \leq 0.3$, where the radial velocity drops to zero, it increases as the Reynolds number increases. After this point, the flow pattern changes such that the velocity decreases as the Reynolds number increases.

More so, the increase in the axial velocity arising from the increase in the Reynolds number tends to cushion the effects of arbitrary increase in the pulse amplitude and height of constriction which decrease the axial velocity.

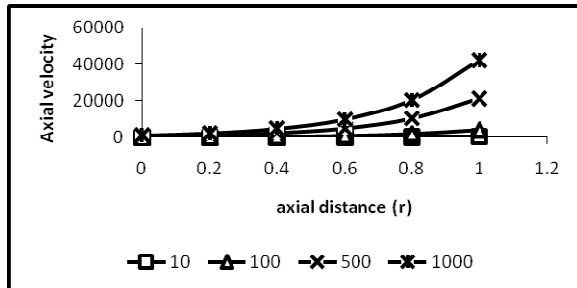


Fig. 1 Axial velocity-Reynolds number profile in a convergent channel

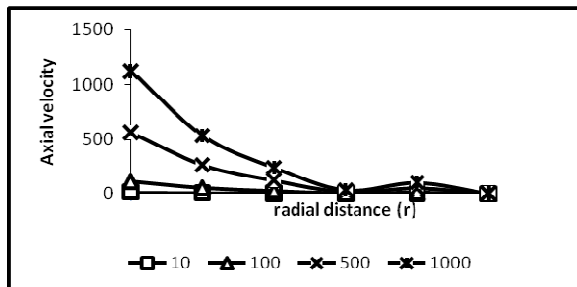


Fig. 2 Axial velocity-Reynolds number profile in a divergent channel

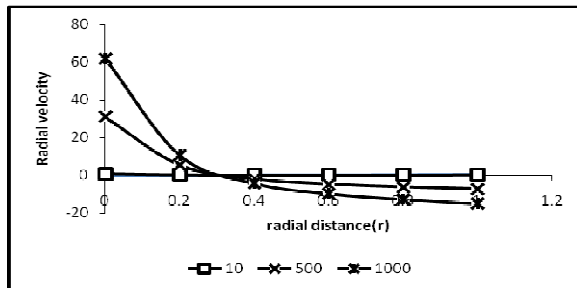


Fig. 3 Radial velocity-Reynolds number in a convergent channel

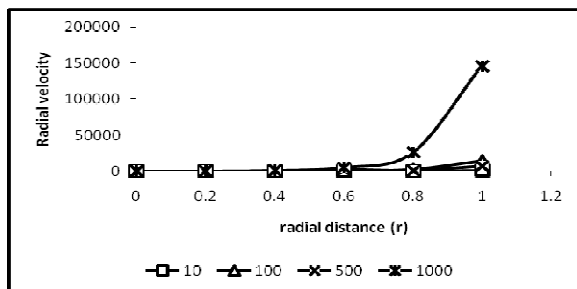


Fig. 4 Radial velocity-Reynolds number profile in a divergent channel

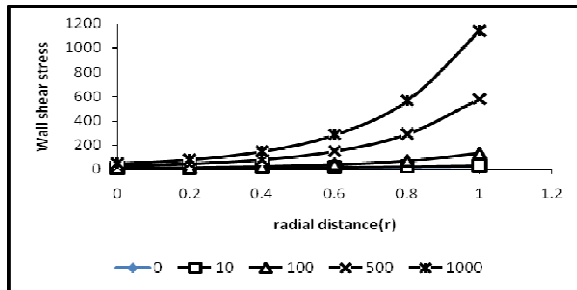


Fig. 5 Wall shear stress-Reynolds number profile in a convergent channel

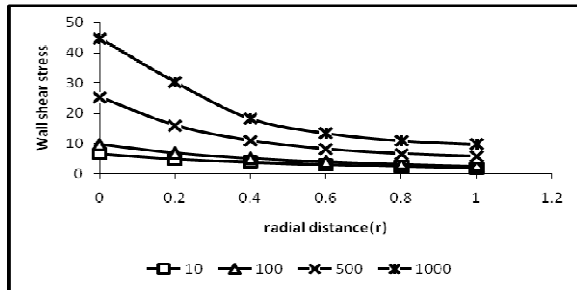


Fig. 6 Wall shear stress-Reynolds number profile in a divergent channel

4. CONCLUSION

The oscillatory flow of an incompressible viscous fluid through the idealized stenotic symmetrical convergent-divergent geometry is examined for the effects of Reynolds number. The computational results are presented graphically, and the overall analysis indicates that the increase in the Reynolds number tends to increase the velocities and wall shear stress. Furthermore, the increase in the axial velocity due to the increase in Reynolds number tends to cushion the adverse effects of pulse amplitude and height of constriction on it.

REFERENCES

- [1] Rao AR, Devanathan R. Pulsatile flow in tubes of varying cross-sections. Z. angew Maths Physics. 1973; 24:203-213.
- [2] Burns JC, Parkes T. Flow of incompressible fluid in peristaltic tubes. Journal of Fluid Mechanics. 1967; 29: 731
- [3] Shapiro AH, Jaffins MY, Weinburg SL. Flow of incompressible fluid in peristaltic tubes. Journal of Fluid Mechanics. 1969; 37:409.
- [4] Lee JS, Fung YC. Flow of incompressible fluid in locally constricted tubes. Journal of Applied Mechanics. 1970; 37: 9.
- [5] Yin FC, Fung YC. Flow of incompressible fluid in peristaltic tubes. Journal of Applied Mechanics. 1971; 47:93.
- [6] Creff R, Andrew P. Dynamic and convective results from a developing unsteady flow. International Journal of Numerical Methods in Fluids. 1985; 5:745-760.
- [7] Haneke H, Laschelski H, Grobe-Gergemann A, Mitra NK. Natural forced convection and combustion simulation. Advanced Computer Methods in Heat Transfer. 1992; 11(2): 287-298.
- [8] Mekheimer KhS, Haroun MH, El Kot MA. Influence of heat and mass transfer in blood flow through an anisotropically tapered and elastic arteries with overlapping stenosis. Applied Mathematical Information Science. 2012; 6(2):281 – 292.
- [9] Usman M, Naheed Z, Aqsa N. On MHD flow of an incompressible viscous fluid in convergent and divergent channels. Journal of the Egyptian Mathematical Society. 2014; 22:214 – 219.