

EVALUATION OF CLAY MINERAL DEPOSITS IN OHIYA, SOUTHEAST NIGERIA USING THE SELF POTENTIAL METHOD AND LITHOLOGS

ABSTRACT

A self potential survey was carried out on the study area. Four prospects were considered. The prospect investigated had a total area of 2.34km². 18 profiles were obtained from the prospects alongside three other random profiles considered. A total of 315 SP measurements were obtained using the direct potential method with a 10m increase in the electrode spacing along each of the profiles. Obtained data show a potential range of -2mV to -600mV and 1mv to 251mV. On analysis, SP spectral signatures and the tomography map reveals that there were also non-conductive materials like silt, sandstone, sand, e.t.c which constitutes impurities and the overburden. The Iso-Potential contour map of the study area also reveals Nkwoebo, Egbeada and Umuoram as areas of likely kaolin abundance. Litho-logs of excavated sites were obtained to give us a quantitative clue of the mineral in the investigated prospects. It was observed that the overburden thickness is about 1.22m, the thickness of kaolin deposit to be above 12.2m and the average bulk reserve is about 74,360,000 metric tons.

Key Words: Kaolin, Self, Potential.

INTRODUCTION:

Kaolinite (Aluminum Silicate hydroxide) is a clay mineral, part of the group of industrial minerals chemically composed of aluminum, silicon and water with the chemical formula $Al_2Si_2O_5(OH)_4$. Rocks that are rich in kaolinite are known as kaolin or China clay. Kaolinite is mined as kaolin and is sometimes called kaolin.

Kaolinite is formed typically by intense weathering and it occurs in abundance in soils that have formed from the chemical weathering of rocks in hot, moist climates. Chemical weathering of aluminum silicate minerals like feldspar gives rise to kaolin. This alteration may be caused by the process of ordinary weathering of feldspar first, into clay mineral to kaolin with less water. It can also be formed by the action of gases on the feldspar deposit formed as a result of intrusion of granite associated with some special set of mineral such as cassiterites and other minerals of pneumatolytic origin. (Egbai, 2013). Table 1 describes the physical properties of kaolinite.

33

Table 1: Physical Properties of Kaolinite (Pohl, 2011)

PHYSICAL QUANTITY	DESCRIPTION
Luster	Pearly to dull earthy
Fracture	Earthy
Hardness	2 to 2.5 on Moh's scale of hardness. It can leave marks on paper
Streak	White
Size	Very fine, less than 2 microns
Tenacity	Flexible but inelastic
Specific gravity	2.6 (average)
Crystal habit	Foliated and earthy masses. Crystals of any size are rare and it is usually microscopic
Cleavage	Basal, perfect in one direction

34

35 Kaolin has various uses in industry, agriculture, medicine, geology and in earth sciences.
 36 Industrially, it is chiefly used in the manufacture of paints and paper. It is used as a filter for
 37 paint, to extend titanium dioxide (TiO₂) thereby modifying the gloss level of the paint. The
 38 degree of whiteness of any paint therefore depends on the quality of Kaolin being used in its
 39 manufacture It can also be used in agriculture; in organic farming as a spray applied to crops
 40 to deter insect damage and to prevent sun scald especially in apples. This controls the damage
 41 to fruits and vegetables from insects, termites and fungi. (Oruobu 2004).

Glossy papers used in most magazines are produced with kaolin. Aside paint and paper, it can be used in the manufacture of soap, ink, textile, ceramics, tyre, toothpaste, smoking pipes, facial masks. It can also be used as; a light diffusing material in white incandescent light bulbs and as adsorbents in water and waste water treatment. Medically, kaolin can be used in manufacturing pharmaceutical products and to induce blood clotting in diagnostic procedures. It is however edible and can be eaten for health or to suppress hunger. Consumption is greater among women especially during pregnancy (Leiviska *et al* 2012)

THE STUDY AREA

Ohiya lies between Latitude $05^{\circ} 29'$ and $05^{\circ}.33'$ North and Longitude $07^{\circ}.26$ and $07^{\circ}.28'$ East covering an area of about 15.7km^2 . The location map is as shown in figure 1. Ohiya is underlain by the Benin Formation comprising of shale/sand sediments. It is made up of poorly sorted, friable and fluvio-lacustrine sand deposits with minor intercalations of clays. It is mostly coarse-grained, pebbly, poorly sorted and contains pods and lenses of fine grained sands, sandy clays and clays. It is a part of the coastal plain sands of the Cenezoic Niger-Delta region of Nigeria (Asseez 1972). Locally, it is composed mainly of clays and alluvium deposits. The kaolin deposits are consolidated and are surrounded by sand, silt and clays as shown in the geologic map in Fig 2.

Ohiya has a high relative humidity of over 70% and it is characterized by high temperature of about $29^{\circ}\text{C} - 31^{\circ}\text{C}$. It has an annual rainfall of about 4000mm per annum with two seasons – dry and wet seasons. Wet season starts from mid April to October and dry season from November to Mid April. It has double maxima rainfall peaks in July and September with a short dry season of about three weeks between the peaks locally known as “August Break.” (Amos-Uhegbu *et al* 2012)

The relief pattern of the study area shows an undulating pattern. It has high and low elevation and valleys. The Northern part has the highest elevation with an elevation of about 350ft to

67 430ft above sea level while the middle part filled with valleys and gullies with an elevation of
 68 330ft and below. The elevation begins to rise again as we move Southwards as illustrated in
 69 the three-dimensional relief map shown in Fig 3.

70 The topography is has an uneven slope with the Southern and Northern parts having a gentle
 71 slope while the Eastern and the Western parts have a very steep slopes. This is where we can
 72 see the concentration of lowlands and valleys.

73

74

75

76

77

78

79

80

81

82

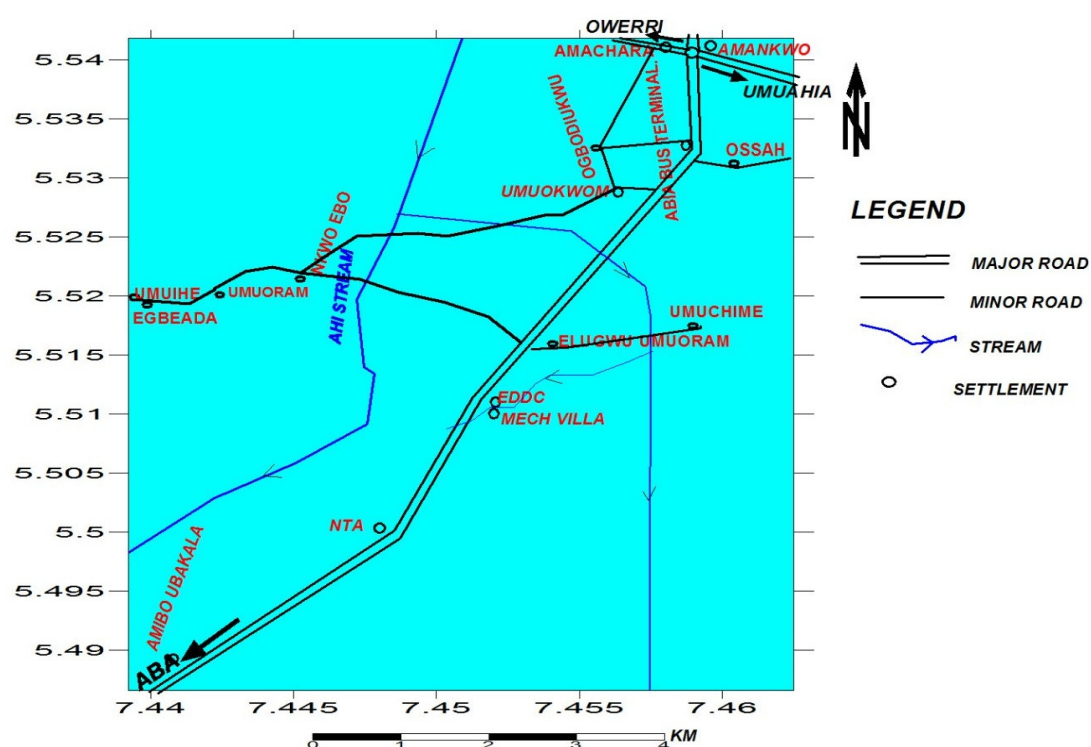


Fig. 1 Location Map of the Study Area.

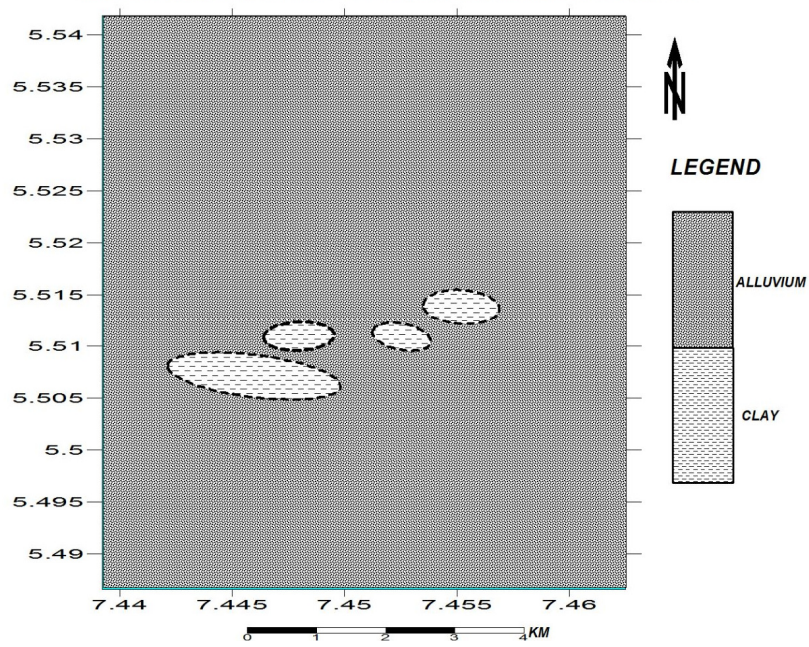


Fig 2 Local Geologic map of Ohiya

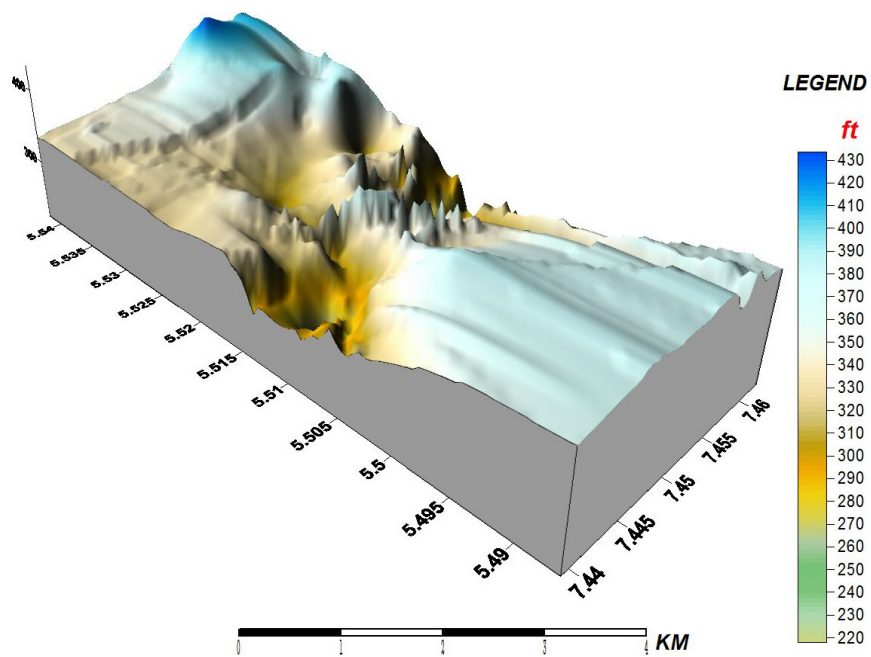


Fig 3. 3-D Relief Map of Ohiya

98 MATERIALS AND METHOD

99 A pair of non-polarizable electrodes, Ohmega 1000 tetrameter and two reels of wire were
 100 assembled in a field survey to get self potential data. One end of each of the reels of wire is
 101 connected to the terminals of the tetrameter. The other end of the first reel of wire is
 102 connected to the electrodes at the base station at zero offset distance (x) while the other end
 103 of the second reel of wire is connected to the roving electrode. The reel of wire is unreeled as
 104 the roving electrode is moved from point to point along the survey line. Four prospects were
 105 investigated as well as three other randomly taken profiles. The direct potential method was
 106 used because the reel of wire is sufficiently long to cover the traverses in each measurement
 107 location.

108 A grid was made on each prospect with many profiles. In prospect one, nine (9) profiles were
 109 covered while in prospects two, three and four, we had four, three and two profiles covered
 110 respectively. Prospects one to four have areas of 1.29Km^2 , 0.3046Km^2 , 0.1492Km^2 and
 111 0.6014Km^2 respectively which implies that a total of 2.3452Km^2 was covered. The lengths of
 112 the profiles were from 100m to 200m of length depending on the terrain. SP measurements
 113 were taken along each of the profiles with a 10m increase in the electrode spacing in all the
 114 profiles.

115 Litho-logs were also obtained from excavation and sight observation for quantitative analysis.
 116 In all, 315 SP Data sets were obtained for study and analyses. The map of the prospects
 117 investigated is as shown in Fig 4

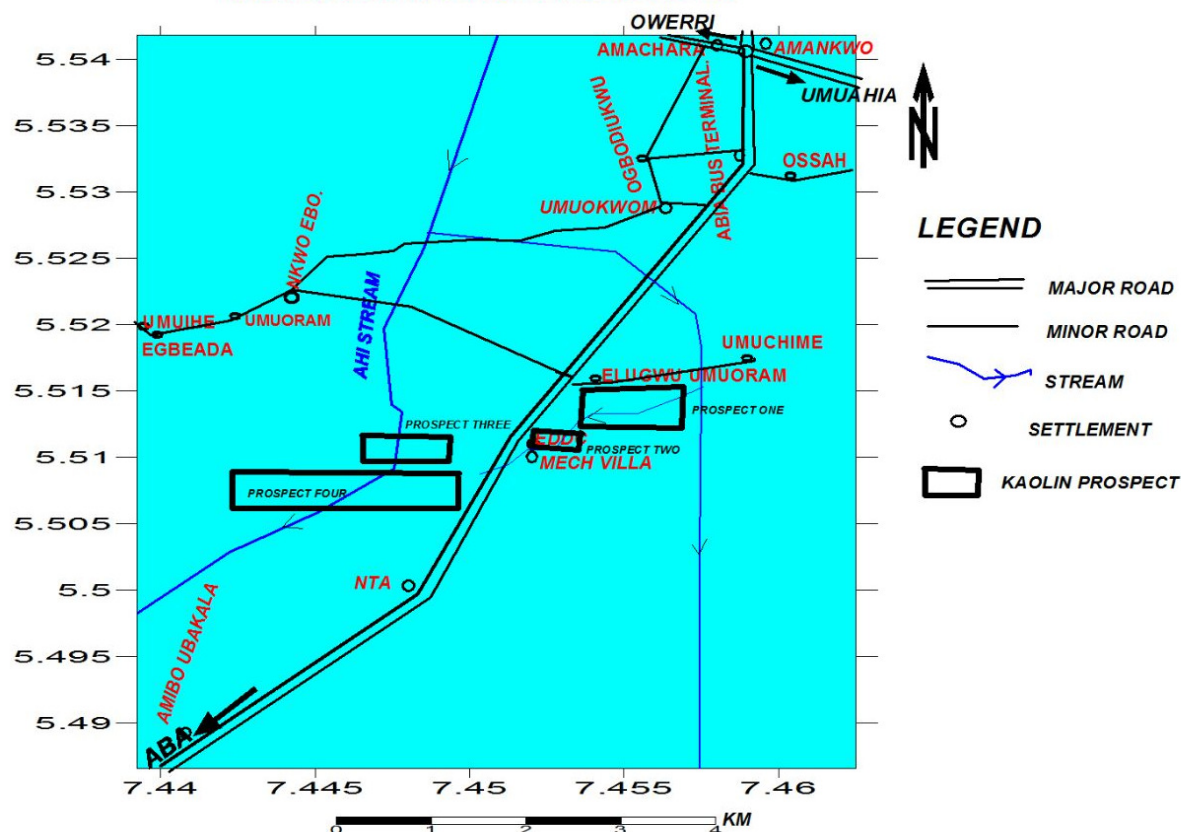


Fig 4. Kaolin Prospects investigated

RESULTS AND DISCUSSION:

Some of the obtained SP values are as shown in table 1. The SP values for each of the profiles were analyzed. A plot of self Potential against the offset distance (x) gives the spectral signature which gives us information on the conductivity of clay in the subsurface. One of the many Spectral signatures in each of the prospects is as shown in figure 5.

Positive potential values depict the presence of non conductive materials like silt, sand sandstone, etc while the negative values indicate the presence of conducting minerals like clay. From the SP spectral signatures kaolin is likely to be seen in abundance within prospects 1, 3 and four as well as the areas of random profiling. It can as well be seen in prospect two but might be mixed with great amount of impurities in form of host rock.

129 The Iso-potential map of the study area (Figure 6) is contoured with an interval of 50mV
130 which reveals major areas of kaolin/clay abundance which was later delineated in figure 7. It
131 can be deduced that kaolin/clay deposit is likely to be abundant in these localities: Nkwoebo,
132 Egbeada and Umuoram as can be inferred from the map.

133

134

135

136

137

138

139

140

141

142

143

144


145

146

147

Table 1: Some SP Values of Clay in Ohiya

	SP Values (mV)				
X (m)	Random	Prospect 1	Prospect 2	Prospect 3	Prospect 4
0	-44.82	-2.018	-19.77	-4.097	30.32
10	-67.14	5.375	224	-144	-84.38
20	-109.5	-90.87	251.1	-185	-102.4
30	-146.4	-34.98	188	-222.6	-207.4
40	-263.3	-45.43	176.9	-118.6	-363.9
50	-240.9	-67.95	54.56	-186	-216.5
60	-230.7	-92.69	19.57	-249	-209.4
70	-192.1	-195.2	131.8	-352.7	-274.5
80	-225.7	-196.2	3.083	-514.4	-197.2
90	-249	-220.6	-108.5	-373.1	-266.3
100	9.394	-86.4	105.4	-441.2	-268.4
110	-338.5	-106.4	-	-	-
120	-270.4	-166.7	-	-	-
130	-282.6	-84.98	-	-	-
140	-281.6	-122.7	-	-	-
150	-297.8	-262.3	-	-	-
160	-371	-336.5	-	-	-
170	-305	-	-	-	-
180	-336.5	-	-	-	-
190	-233.8	-	-	-	-
200	-174.8	-	-	-	-

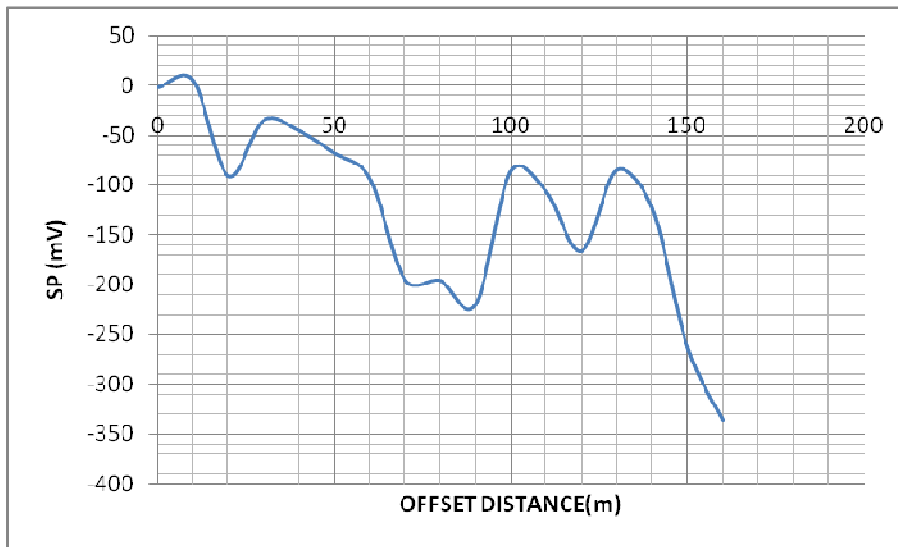


149

150 a) Prospect one


151

152

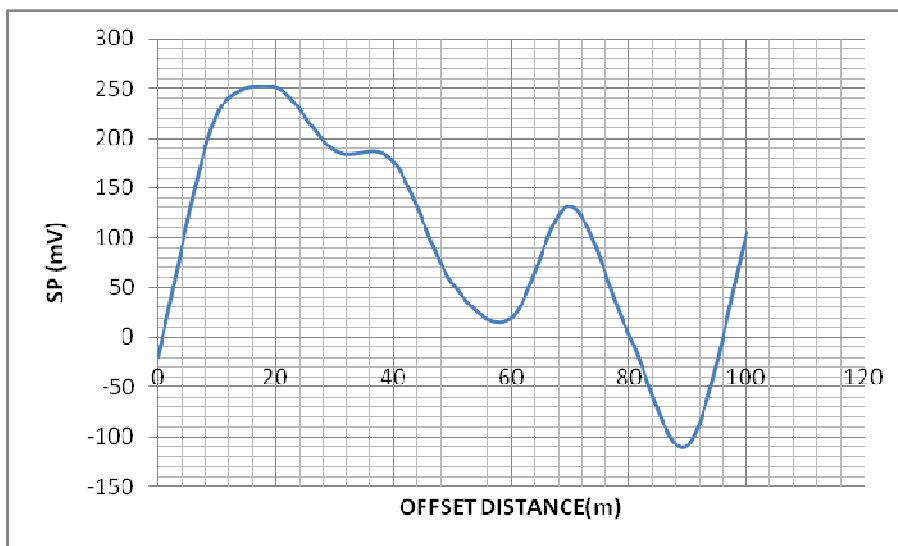

153


154 b) Prospect Two

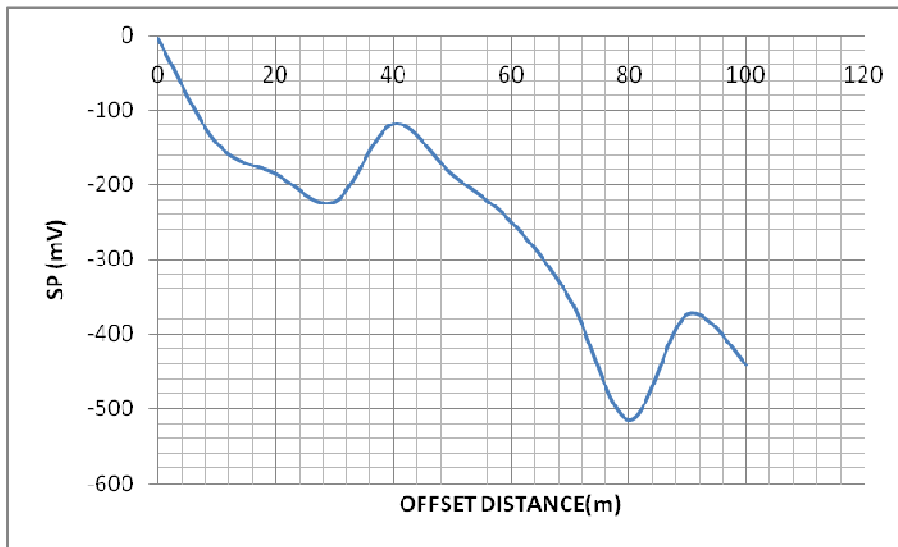

155


156 c) Prospect three

157

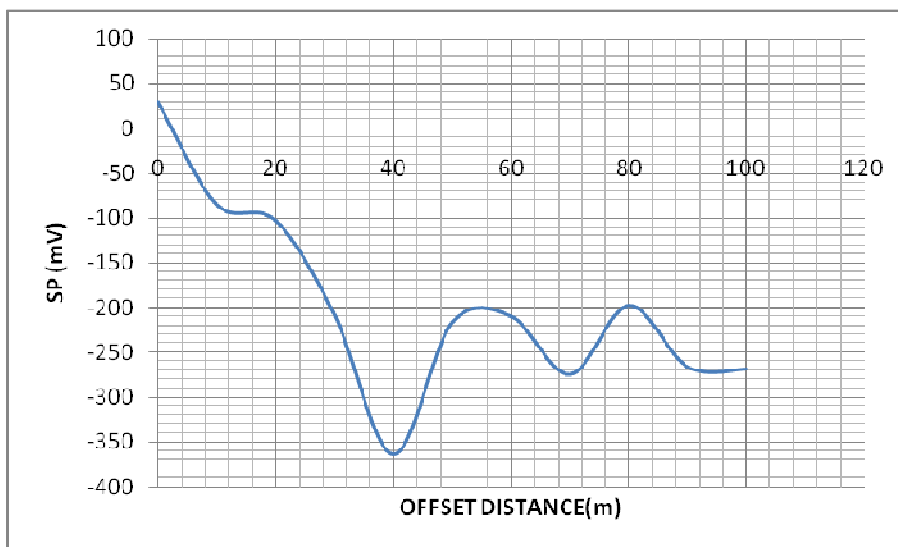

158

159 d) Prospect four

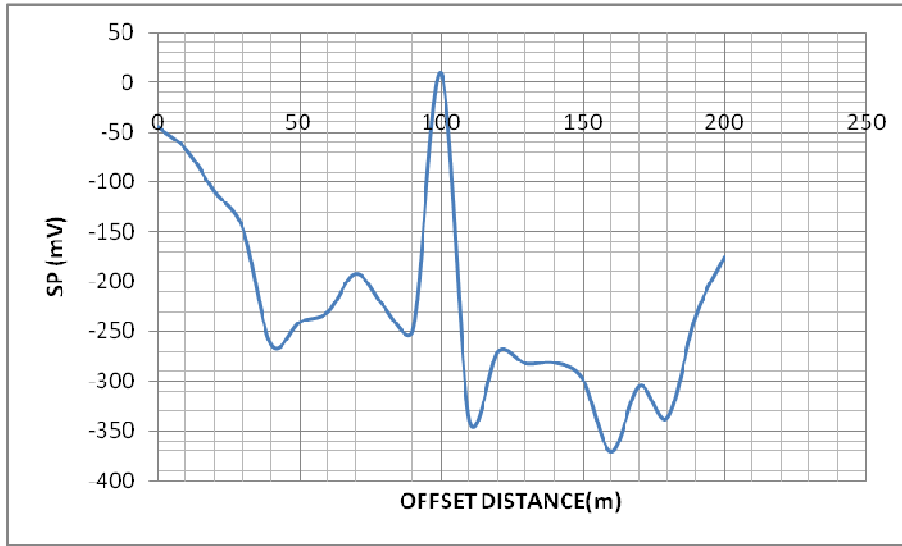

e) Random Profile

Figure 5 SP Spectral signatures of Kaolin Prospects in Ohiya


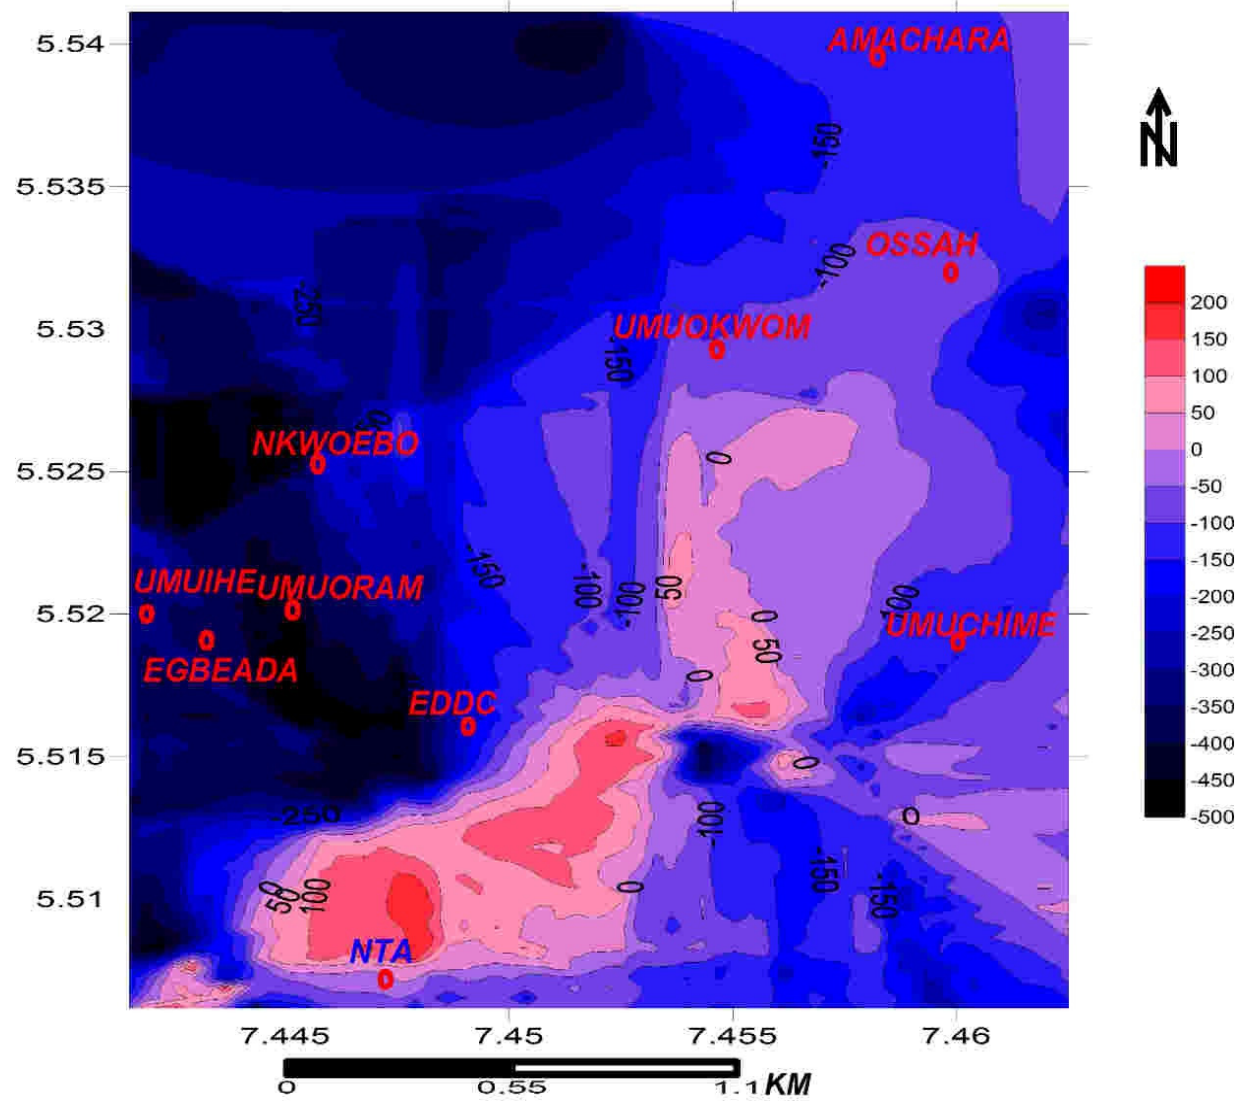


Fig 6 Iso-Potential map of Ohiya

Fig 7 Kaolin clay deposit inferred from sub-surface mapping

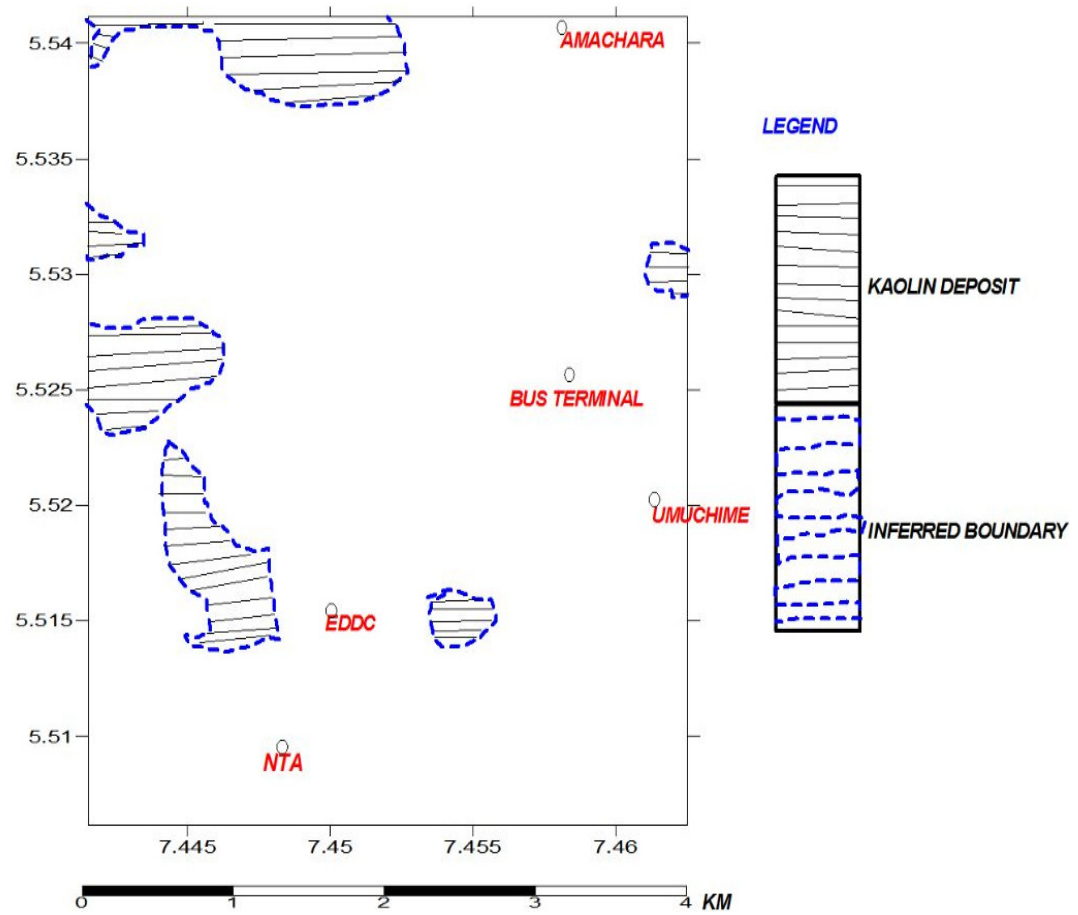

TOMOGRAPHY

The nature of the kaolin deposit in the prospect areas can be seen using the tomographic chart shown in Fig 8

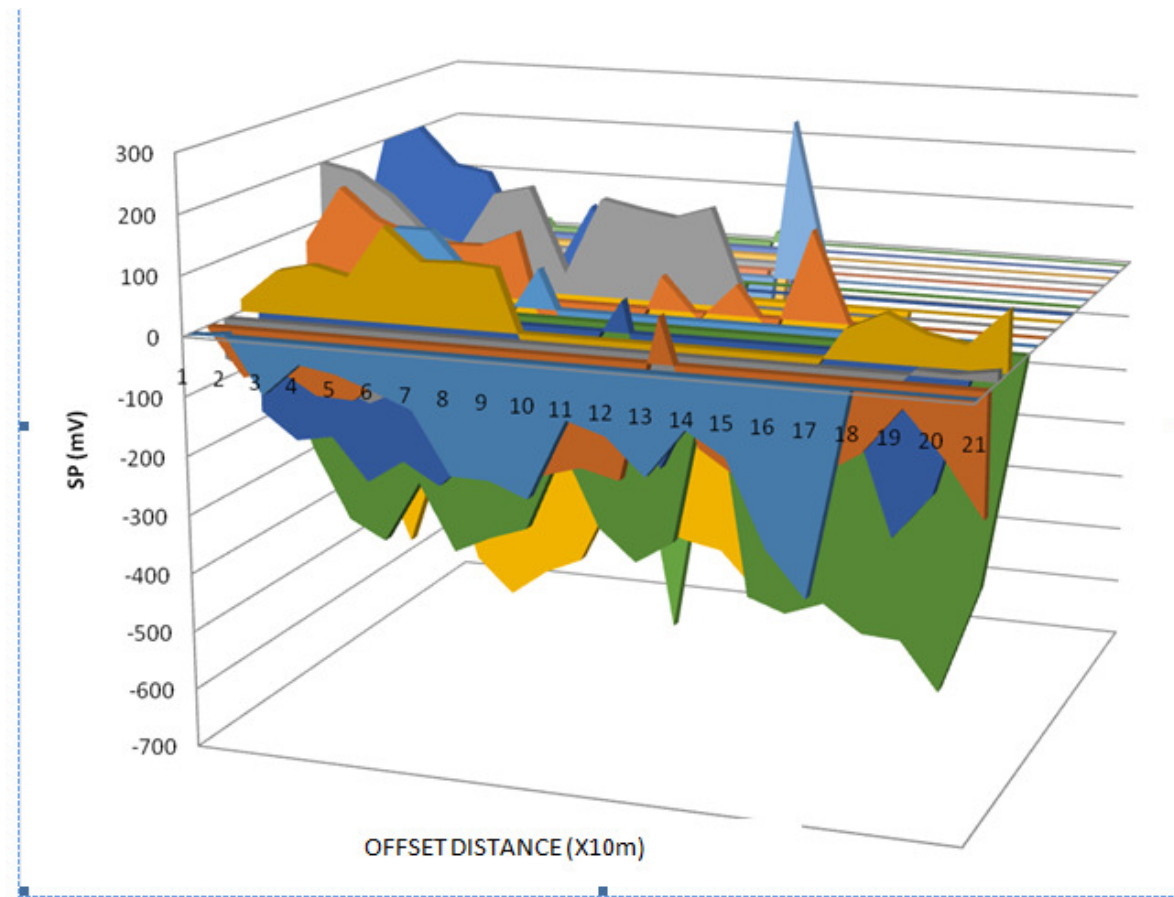


Figure 8. SP Tomography of Prospect Areas.

A slice through the SP values reveals that values above zero shows the overburden. The colour variation reveals the anisotropic nature of the electrical properties of the kaolin implying that conductivity depends on the offset distance. The SP values ranges from about -2mV to -600mV and from 0 to 200mV

QUANTITATIVE ANALYSIS

To get the quantitative information of the kaolin deposits in the study area, a litho-log was obtained from three different excavated areas as shown in Fig 9 and 10

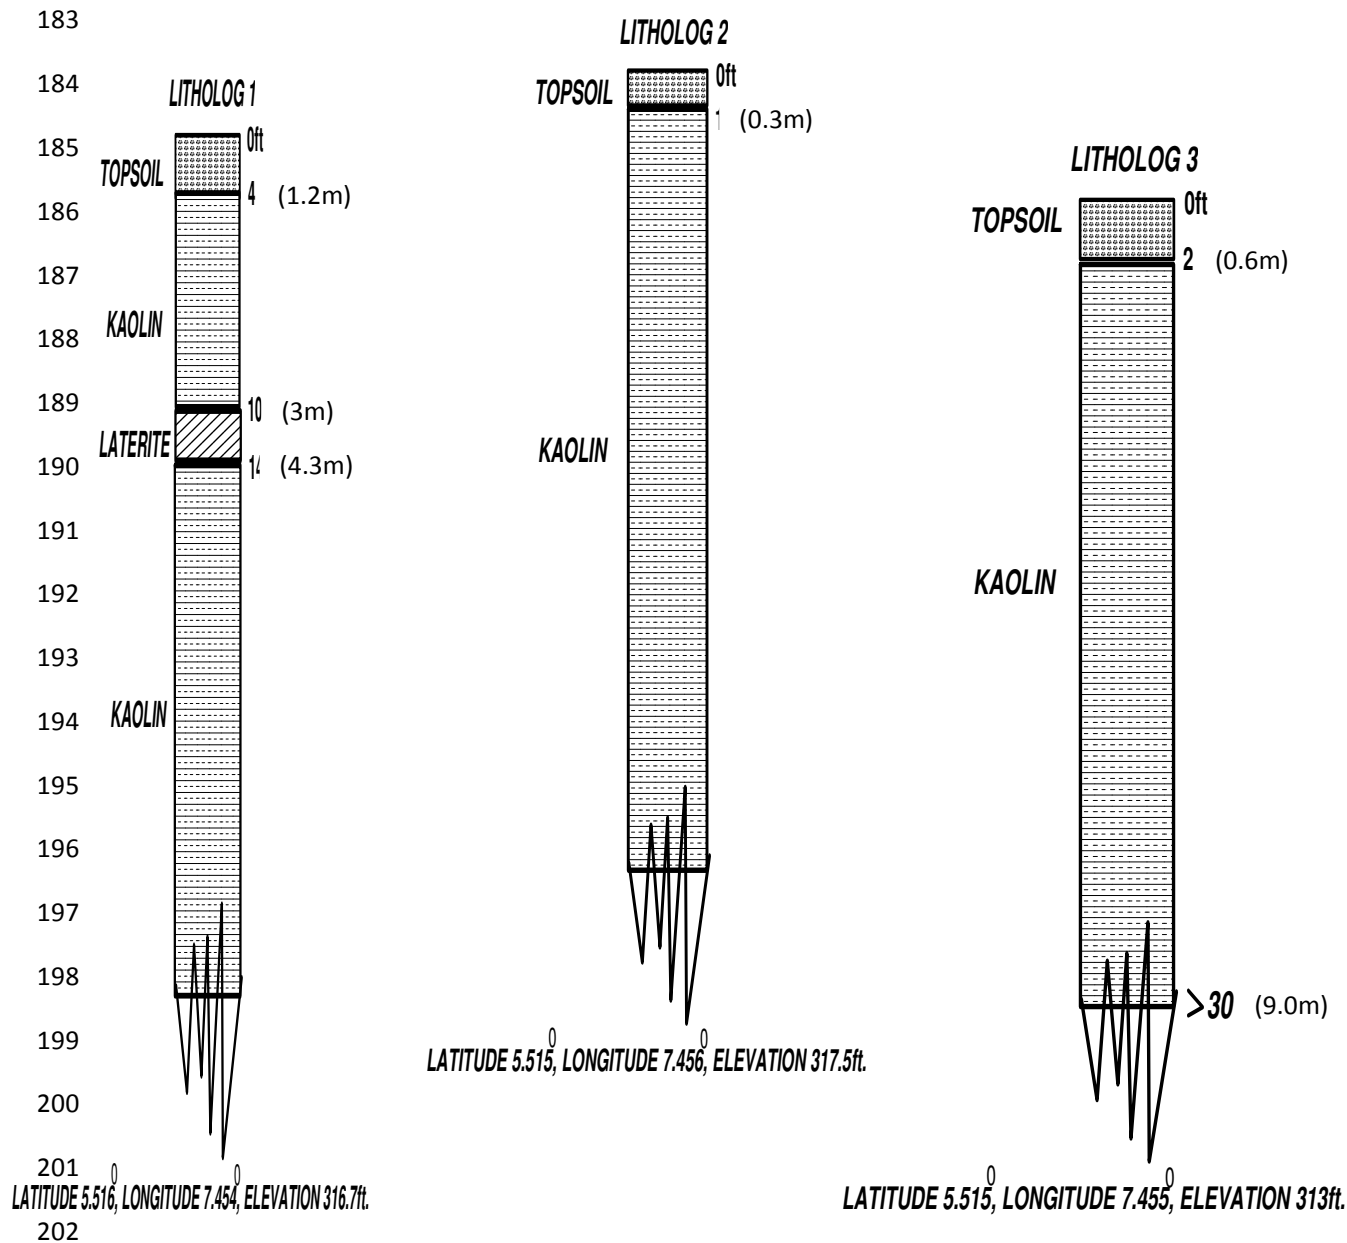


Fig 9 Litho-log from surface geologic mapping

LITHO-LOG CORRELATION

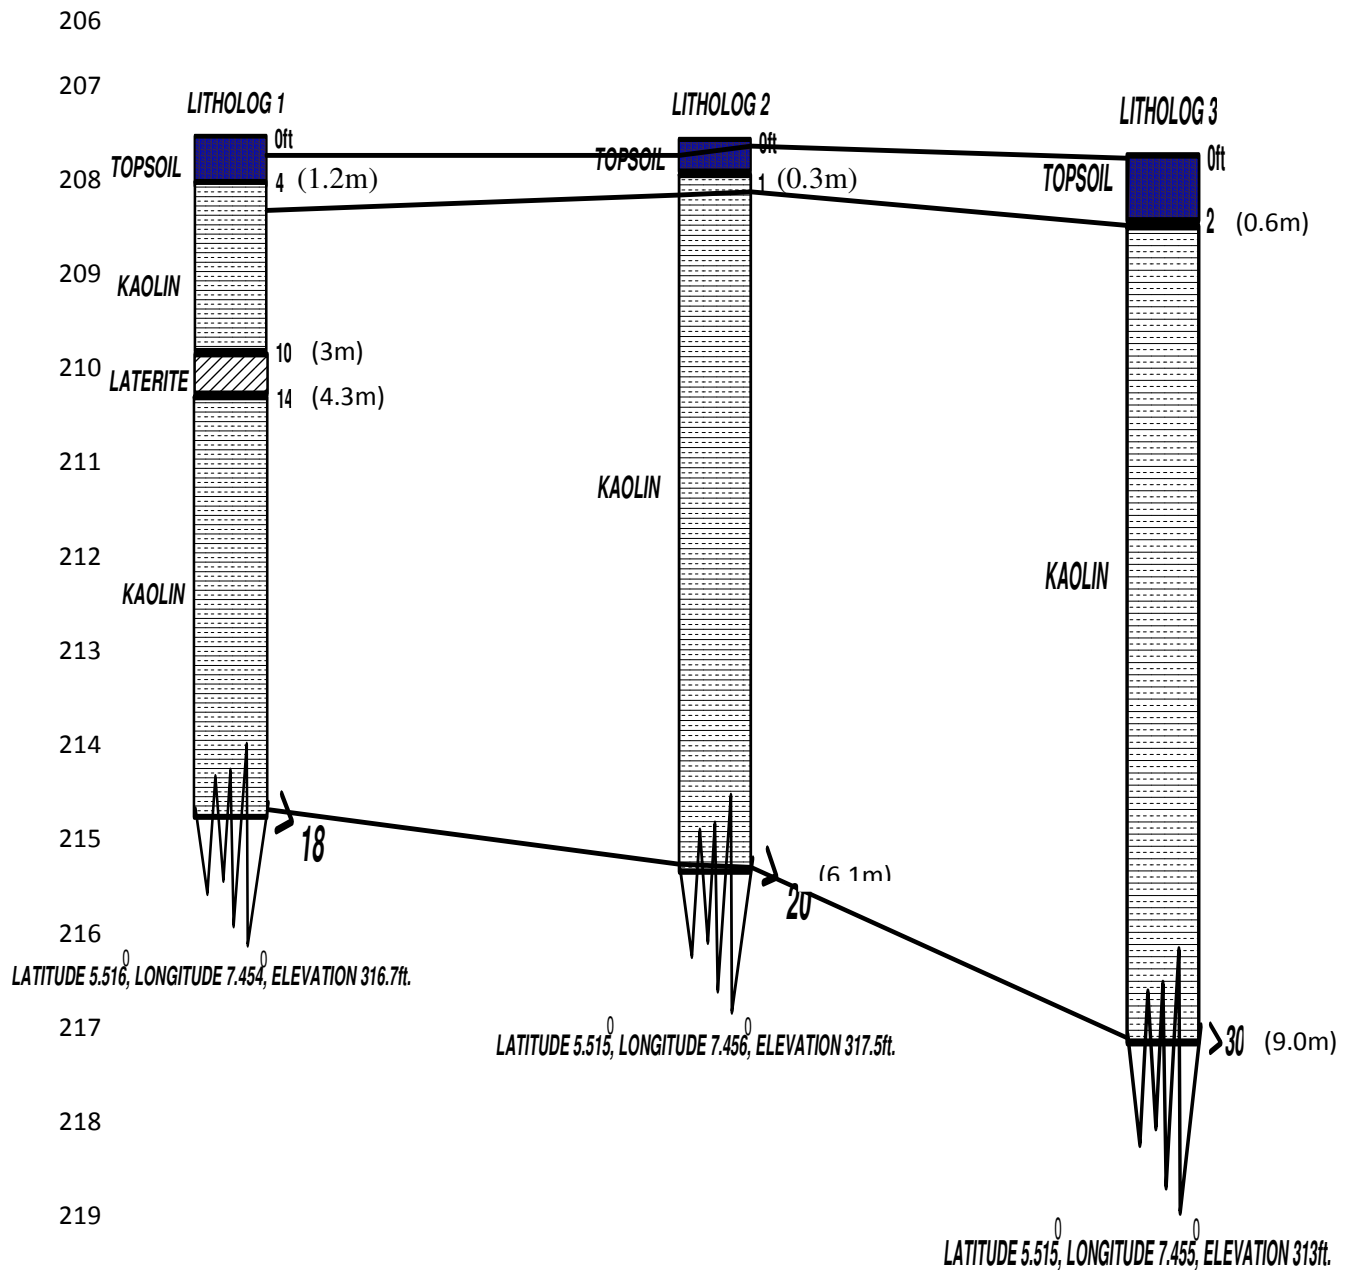


Fig 10 Litholog Correlation

From the litho-logs obtained from site excavation, an average overburden of 1.22m (4.0ft) was discovered and a depth (d) of kaolin obtainable is about 12.2m (39.37ft).

225 **Kaolin Bulk Reserve**

226 The bulk reserve/tonnage of a mineral is given by the product of the volume, depth and
 227 specific gravity. Since the prospects covered have a total area of 2.3452sqKm
 228 (2,345,200sqm) and the average depth of kaolin deposit ascertained from the litho-log is
 229 about 12.2m. Then;

230 Volume of the kaolin in the prospects investigated = $12.2 \times 2,345,200$

231 $= 28,611,440\text{m}^3 = 28,600,000 \text{ m}^3$ (in the nearest hundred of thousand).

232 The average specific gravity of kaolin is 2.6. Then the average tonnage or bulk reserve of the
 233 prospects $= 28,600,000 \times 2.6$

234 $= 74,360,000$ metric tons

235 **CONCLUSION:**

236 Self potential which is the naturally occurring electrical potential of the earth results from
 237 geologic, geochemical and hydrological interactions. It has wide range of application
 238 especially in mineral prospecting. Kaolinite, a clay mineral formed from the chemical
 239 weathering of aluminum silicate minerals like feldspar is of great economic benefit. It is used
 240 in agriculture, medicine, geology and in earth sciences. It is also used by paint, paper and
 241 ceramics manufacturing industries.

242 It was observed that clay mineral in the study area has a self potential of between -2mV and -
 243 600mV. Spectral signatures of the profiles obtained show that there were other non-
 244 conductive materials like sand, silt, sandstone, etc. which were also noticed. The Iso-potential
 245 map of the study area reveals many other localities in the study area where kaolin/clay
 246 mineral is likely to exist abundantly which include, Nkwoebo, Egbeada and Umuoram.

However, since SP gives only qualitative information litho-logs were obtained from excavated sites to get a clue on the quantitative properties of the kaolin in the prospects investigated. It was observed that the kaolin is likely to have; an overburden of about 1.22m (4.00ft), a depth of about 12.2m and a bulk reserve of about 74,360,000 metric tons. SP method is precise and efficient electrical method which can be used in mineral prospecting. If well utilized, it can give much information about minerals in the earth's sub-surface.

REFERENCES

- Amos-Uhegbu, C., M.U Igboekwe, G.U Chukwu, K.O Okengwu and T.K Eke (2012). Hydrogeophysical delineation and hydrogeochemical characterization of the Acquirer systems in Umuahia south Area, Southern Nigeria. *British Journal of applied science and technology* 2(4) 406 – 432
- Asseez, L.O. (1976). Review of the stratigraphy, sedimentation and structure of the Niger Delta. In: Kogbe, C.A. (ed.). *Geology of Nigeria*. Elizabeth Publ. Co.: Lagos, Nigeria, 259–272.
- Egbai J.C (2013). Kaolin quantification in Ukwu-Nzu and Ubulu-Uku using electrical resistivity method. *International Journal of research and reviews in applied sciences* 14(13) 792 – 701
- Leiviskä, Tiina; Gehör, Seppo; Eijärvi, Erkki; Sarpola, Arja; Tanskanen, Juha (10 April 2012). "Characteristics and potential applications of coarse clay fractions from Puolanka, Finland". *Central European Journal of Engineering* 2 (2): 239–247.
- Oruobu, D (2004) Kaolin as bedrock of manufacturing industry. *Business Times*, Monday, June 22 p.12
- Pohl, Walter L. (2011). *Economic geology: principles and practice : metals, minerals, coal and hydrocarbons – introduction to formation and sustainable exploitation of mineral deposits*. Chichester, West Sussex: Wiley-Blackwell. p. 331.