

Determination of Energy Content of the Municipal Solid Waste of Ado – Ekiti Metropolis, Southwest, Nigeria.

ABSTRACT

Municipal Solid Waste (MSW) is a material discarded as worthless to the person generating it in the city and it has been a serious threat to the eco-system but it can be channeled into a very useful form to generate energy and thereby converting it to wealth. The waste samples were harvested, sorted, sundried, pulverized and sieved using a sieve size of 500micron. The moisture content of the constituents of the waste sample was determined. The digital bomb calorimeter (Cal – 2k Eco Calorimeter) was used to test the calorific value of the components of the prepared waste samples. The results shows that the polythene products waste has the specific energy content of 35,959 kJ/kg while the bones component of the waste sample has 6,994.39 kJ/kg. The mean specific energy content is 17.57MJ/kg. The total energy content of the MSW generated within the urban metropolis is 4,449,426.14MJ/day. This implies that when used per day for steam production 51.5MW of electricity could be generated in Ado-Ekiti.

Keywords: Municipal Solid Waste (MSW), Worthless, Eco-system, Harvested, Generate Energy, Wealth, Manually, Sorted, Sundried, Pulverized, Sieved, Moisture content Digital Bomb Calorimeter, Calorific Value, Total Energy Content , Metropolis, Electricity.

1.0 INTRODUCTION

In the early part of the 20th century, most refuse came from the kitchen and consisted mainly of food scraps and local ashes. Only about fifteen percent of it is now composed of what most people think of as real garbage, the sort which is likely to decompose and putrify. Since World War II and at an accelerated rate during the 1950's, convenience packaging has become the hallmark of rapid sanitary food preparation. Packaging has reduced the quantity of garbage and ashes as paper, metal, glass and plastics have become the new components (Oyinlola, 1998). The nature of urban waste understandably varies with country, city, suburb and season and can be determined precisely only by analysis in each particular case (Vanden and Kirov, 1972). It also varies with time as living patterns alter. However, the personal income has been found to have the most significant effect on wastegeneration . According to the world Bank data, per capita waste generation ranges between 0.4 and 0.6 kg/day for low

31 income countries between 0.5 and 0.9 kg/day for middle income countries and between 0.7
32 and 1.8 kg/day for industrialized countries. (Oyinlola, 1998). Based on a comprehensive study
33 encompassing nationwide survey and analysis of the solid waste sector in Nigeria, the above
34 waste is also applicable to be observed in Nigeria cities. It is also observed that high income
35 household generated higher quantities of waste than the lower income group. (Oyinlola,
36 1998).

37 In developing countries where waste management systems are insufficient, coupled with the
38 expanding urban population (Daskapoulos, 1998 ; Ehrlich et al, 1996), the problem of refuse
39 disposal is reaching proportions that are called for concern. Also, the operation and
40 management of Municipal Solid Waste (MSW) Collection services are fairly rudimentary.
41 The South – Western part of the country (Nigeria) is being faced with the problem of lack of
42 information about the quantities and types of MSW collected, the amount recovered or
43 revived and the siting of MSW disposal sites (Aguilar et al, 2010). Added to this problem is
44 the erratic power supply from the national grid. Wastes are important source of energy
45 presently used in the generation of electricity and at the same time making the environment
46 clean. The National energy supplies are at present almost entirely dependent on fossil fuels
47 and firewood which are depleting fast (Ikuponisi, 2006)

48 Diso et al, (1995) characterized the refuse in Kano and found out that 13 Megawatts of
49 electricity could be produced from wastes in 1995 covering at least the entire Kano
50 metropolitan area. Mengiseny and Josia (2010) are of the opinion that the main problem
51 facing policy makers in the waste management sector is how to predict the amount of solid
52 waste, generated in the near future in order to devise the appropriate treatment or disposal
53 mechanism. Agunwamba et al, (1998) analyzed the waste in Onitsha (Nigeria). Also in the
54 southern part of the Nigeria, Adeyemi et al, (2004) investigated the impact of waste
55 scavengers - case study of Ilorin in Kwara State, Nigeria. Jekayinfa and Omisakin (2005),

considered ten agricultural wastes in Nigeria to determine their energy content using the method of Association of Official Analytical Chemists.

The results of their analysis revealed the mean Higher Heating Values in kJ/kg of the wastes samples and were presented in the Table 1.0

Table 1.0: The Calorific Value of Waste Samples in kJ/kg.

Waste Samples	Energy Content (Mean Higher Heating Values) (kJ/kg)
Groundnut Shell	16,505
Yam Peels	19,597
Coconut Shell	20,647
Mango Peels	15,891
Palm Oil mill affluent	17,303
Corn Cob	19,458
Cherry	28,203
Orange Peels	19,299 _v
Melon Shell	21,392
Black Walnut Hull	21,143

61

62 Source :Jekayinfa and Omisakin, (2005)

63 All the waste samples considered have heat values greater than some well-known biomass-
 64 fuel and fall within the limit for the production of steam in the electricity generation. Paolo
 65 (2010), investigated the effect of separate collection of municipal solid waste on the calorific
 66 value of the residual waste. He emphasized that, separate collection plays an irreplaceable
 67 role in solid waste management and incineration. Considering the average Italian Municipal
 68 Solid Waste Composition, he proposed separate collection scenarios different from those

69 tested; the regression modeling was also proposed. He calibrated it and tested partially. Ogaji
 70 et al,(2006) investigated the municipal solid waste generated in PortHarcourt. They found it
 71 in large quantities but remains as litter in parts of the municipality.It has been known that in
 72 some parts of the country, the refuse were open – burned which
 73 however often constitutes environmental hazards. Consequent of the heterogeneous nature of
 74 the MSW, it is very difficult if not impossible to make projections.The biogenic combustible
 75 of the municipal solid waste undergo a biological decomposition until a stable material is
 76 formed consequences of the emanating odour from the dumpsite, sewers and landfill where
 77 organic materials are present (Rominiyi, 2006).A comprehensive and holistic characterization
 78 of the Municipal Solid Waste is crucial to the long – term efficient and economic planning for
 79 solid waste management. In this research work, the quantity and the energy content of the
 80 Municipal Solid Waste of the people living in Ado-Ekiti metropolis, Ekiti State, Nigeria were
 81 determined.

82 **Table1.1 : The Gravimetric Composition (kg/day) of the MSW in Ado-Ekiti, Ekiti State**
 83 **, 2014.**

S/N	Combustible Components	% Composition	Quantity MSW generated (kg/day)
1	Bones	3.73	11,190
2	Food waste	9.76	29,280
3	Rubber and Leather	3.71	11,130
4	Polythene Products waste	12.62	37,860
5	Paper and Cardboards	8.14	24,420
6	Textiles waste	4.36	13,080
7	Leaves and Vegetables	8.39	25,170
8	Animal dungs and Excreta	5.83	17,490
9	Wood waste	5.20	15,600
10	Charcoal	1.35	4,050

11	Fruit waste	12.53	37,590
12	Coconut and Palm kernel waste	1.13	3,390
13	Tuberous peels waste	7.66	22,980
14	Metal and Cans	3.90	11,700
15	Glass and Ceramics	9.71	29,130
16	Miscellaneous/ Unclassified waste (dirt, sand, stones, egg shells and ashes)	1.98	5,940
Total		100	300,000

84

85 Source :Rominiyi, (2015)

86 **Table1.2:The Heating Value of Individual Components for Electronic Plastic Waste**

87 **Resins**

Resin	Heating value (HV)
	(kJ/kg)
PMMA	24053.83
ABS	35158.97
PA	26494.67
PC	26713.82
PC/ABS	29719.53
PE	34799.27
PC/PBT	23511.30
PBT	15723.35
PP	45358.28
HIPS	37758.68

PVC	14116.27
ABS/PVC	22364.59

Source: American Plastic Council, (2000)

1.1.0 Electro-Plastic Waste

Study conducted by Daren et al, (1999) shown that 49% of the electronic waste materials consist of metal and about 33% consist of plastic. Basically, the unique electrical insulating properties of plastics are their strength, heat and corrosion resistance, flexibility, lightweight, durability and it is very cost-effective. These characteristics made plastics important materials for use in the electronics equipment (American Plastic Council, 2000).

Plate 1 is a huge amount of solid waste dumped at the King's Market in Ado-Ekiti Metropolis which creates an eyesore to the people with its characteristic foul odour that pollute the environment.



Plate 1 :Refuse Dumped on the Road side at King's Market Ado-Ekiti, Ekiti State.

1.1.1Energy Conversion Processes

Biomass wastes can be easily converted into other forms of energy at high temperatures, They break down to form smaller and less complex molecules both liquid and gaseous including some solid products. Combustion represents a complete oxidation to carbon

dioxide (CO_2) and water (H_2O). By controlling the process using a combination of temperature, pressures and various catalysts and through limiting the oxygen supply, partial breakdown can be achieved to yield a variety of useful fuels. The main thermo-chemical conversion approaches are as follows: pyrolysis/charcoal production, gasification and combustion. The advantages of thermo-chemical conversion processes include the following: rapid completion of reactions, large volume reduction of biomass, range of liquid, solid and gaseous products are produced and some processes do not require additional heat to complete the process.

1.1.2 Chemical Composition

The information on the chemical composition of solid wastes is important in evaluating alternative processing and recovery options. For example, consider the incineration process. Typically, MSW can be a combination of semi moist combustible and non-combustible materials. If solid wastes are to be used as fuel, the four most important properties to be known are: (i) Proximate analysis
(ii) Fusing point of ash
(iii) Ultimate analysis
(iv) Heating value.

1.1.3 Heating Value of Fuels

The heating of a fuel is the quantity of heat produced by its combustion at constant pressure under “normal” conditions (25° and 1 atmosphere). The combustion process products generate water. The following are the various Heating Values:

- i. The Higher Heating Values (HHV) consists of the combustion products of water condensed and that the heat of vapourization condensed in the water vapour is recovered. The water produced in the combustion is in the liquid state.

- 128 ii. The Lower Heating Value (LHV) assumes that water product of combustion at vapour
129 state and that the heat of vapourization is not recovered.
- 130 iii. The Net Heating Value (NHV) is the same as Lower Heating Value and it is obtained
131 by subtracting the latent heat of vapourization of water vapour formed by the
132 combustion from the Gross Heating Value (GHV) or Higher Heating Value.
- 133 iv. The Gross Heating Value (GHV) is the total heat obtained by complete combustion at
134 constant pressure including the heat releasing by condensing the water vapour in the
135 combustion products. It account for liquid water in the fuel prior to the combustion of
136 valuable fuels such as wood and coal . If a fuel has no water prior to the combustion
137 then the gross heating value is equal to the higher heating value .
- 138 $HHV = LHV + \Delta H_{vap} \{MWH_2O^{out}/MW_{fuel}n_{Fuel.in}\} (1.1)$
- 139 ΔH_{vap} = Heat of vapourization per mole of water (kJ/kg or Btu/lb)
- 140 H_2O_{out} = mole of water vapourized.
- 141 N_{fuel} = number of moles of fuel combusted and MW is the molecular weight
- 142 (www.springer.com/978-1-4471-2371-2)

143 **1.1.4Determination of Energy Content of Municipal Solid Waste**

144 The energy content of the organic components in MSW can be determined by:

- 145 (i) Using a full scale boiler as a calorimeter.
- 146 (ii) Using a laboratory bomb calorimeter of any type.
- 147 (iii) Calculation if the elemental composition is known.

148 In this research work due to the difficulty in using a full scale boiler, most of the data on the
149 energy content of the organic components of the municipal solid waste was based on the
150 results of electronic bomb calorimeter tests.

151 **2.0 METHODOLOGY**

152 **2.1.0 Sample Harvesting and Preparations**

Waste samples were randomly collected throughout the city of Ado-Ekiti in the local dumpsites and dinobins located at some strategic locations in Ekiti state capital (Ado – Ekiti). The solid waste samples categorized into combustible components and non-combustible components were sun-dried, pulverized (the organic part of the constituents) and sieved with a mesh size of 500 micron.

2.1.1 Procedure to Determine the Percentage Moisture Content (MC) in the Municipal Waste Samples

The mass of silica crucible was measured using the digital weighing balance and recorded $w_1(g)$, the spatula was used to fetch 1.00g of pulverized solid waste samples inside the crucible. The content kept inside the silica crucible and the crucible was measured and recorded as $w_2(g)$. It was then heated in a muffle furnace at a temperature of 105°C for 1 hour. The crucible is taken out, cooled in a desiccator and weighed. The process of heating, cooling and weighing was repeated until a constant mass of the municipal solid waste sample (anhydrous) was obtained $w_3(g)$. The equation 2.2 was used to determine the percentage moisture content of the combustible components of the municipal solid waste.

$$\% \text{ MC in the solid waste} = \frac{w_2 - w_3}{w_2 - w_1} \times \frac{100}{1} \text{ (Gupta, 2010)} \quad (2.2)$$

Where : $w_2 - w_3$ is the loss in mass of the solid waste sample.

$w_2 - w_1$ is the initial mass of the solid waste. The procedures to determine the moisture content of the combustible components of municipal solid waste were replicated three times and the percentage average values were presented in the Table 3.3 .



173

174 **Plate 1:** The pulverizer used for grinding the solid waste sample.

175



176

177 **Plate 2:** Digital Weighing Balance

178 **2.1.2 Evaluation of the Energy Content of the Municipal Solid Waste Using Bomb**

179 **Calorimeter(The Cal 2k-Eco Calorimeter).**

180 The weight of a clean crucible was tarred down to zero on the digital weighing balance. 0.5g

181 of already dried pulverized waste sample was measured. The sample identification and the


182 corresponding mass was entered through the PC keyboard of the calorimeter prior to the

183 determination of the energy content. The pre-cut of firing cotton was looped over the firing

184 wire. The weighed crucible and the sample in a crucible holder were inserted and it was
 185 ensured that the firing cotton touches the samples. The lid assembly was inserted into the
 186 vessel body and the cap-down was screwed until it touches the top of the lid. The vessel was
 187 placed onto the vessel holder under the filling station uprightly positioned and filled with
 188 oxygen to 3000kPa. The vessel was inserted into the measuring chamber and then closed the
 189 lid.



190
 191 **.Plate 3: The Cal 2k Eco Calorimeter Assembly**

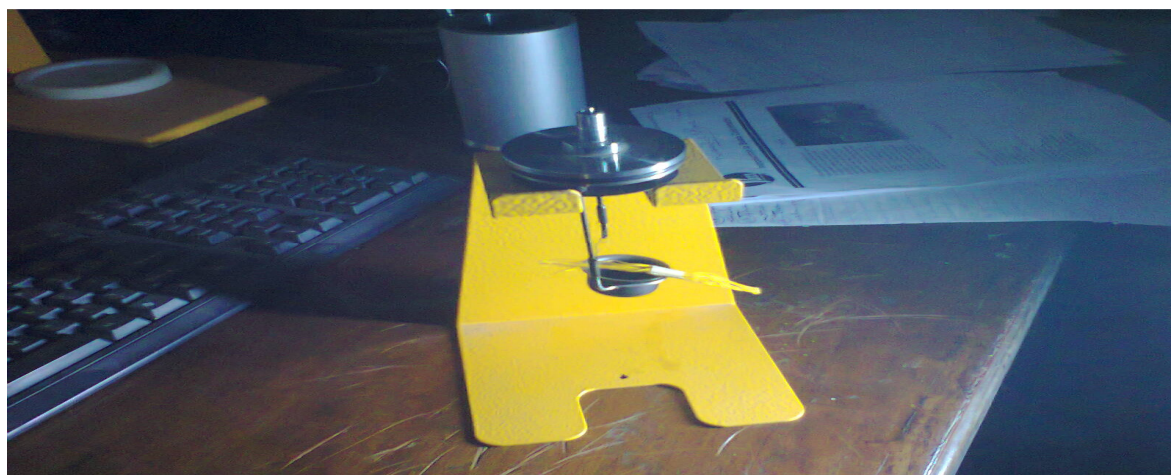

192
 193 **Plate 4.: Bomb and Crucible holder of the Cal 2k-Eco Calorimeter Assembly.**

The temperature stabilization phase was carried out for the duration of 10 minutes and when the initial conditions are met at a voltage of 220V the vessel was **automatically** fired .The **calorific value** figure was calculated **automatically** every 6 seconds taking into account the calibration curve, calorific value corrections and sample mass. The duration of this phase is 10 minutes.On completion of the final phase, a final calorific value (CV) result was displayed on the screen of the calorimeter and stored. The mass and the sample identification number were deleted. The vessel and defiling cap are defilled to release the pressure inside the vessel. The vessel cap was unscrewed and the lid assembly was removed. It was also ensured that the vessel and the residue between each sample was cleaned with soft cloth and cooled in fresh air in the open. The procedure was repeated three times and the mean values obtained were presented under results and discussion..

3.0 RESULTS AND DISCUSSIONS

This study was designed to evaluate the energy content of the municipal solid waste in the city of Ado-Ekiti ,Ekiti State.The results of the moisture content and the energy content of the municipal solid waste were also presented.

Table 3.3 : Moisture Content Analysis of Municipal Solid Waste in Ado –Ekiti, Ekit State

S/N	Components	% Moisture Content
1	Bones	3.58
2	Food waste	5.90
3	Rubber and Leather	0.86
4	Polythene products waste	0.82
5	Paper and Cardboards	5.57
6	Textiles waste	1.80
7	Leaves and Vegetables	12.79

211	8	Animals' dungs and Excreta	11.33
	9	Wood waste	9.40
	10	Charcoal	6.73
	11	Fruit waste	9.55
	12	Coconut and palm kernel waste	8.91
	13	Tuberous peels waste	9.55

212 **Table; 3.4 The Experimental Higher Heating Values (HHV) (kJ/kg) of the Combustible**
 213 **components of MSW in Ado – Ekiti, Ekiti State.**

214

S/N	Component ^{22s}	Experimental
		HHV (kJ/kg)
1	Bones	6,994.39
2	Food waste	14,176.14
3	Rubber and Leather	20,946.52
4	Polythene products waste	35,959.00
5	Paper and Cardboards	11,210.00
6	Textiles waste	17,800.48
7	Leaves and vegetables	14,069.37
8	Animals' dungs and Excreta	13,848.16
9	Wood waste	16,795.96
10	Charcoal	18,711.70
11	Fruit waste	14,328.96
12	Coconut and palm kernel waste	13,944.80
13	Tuberous peels waste	14,574.95

215

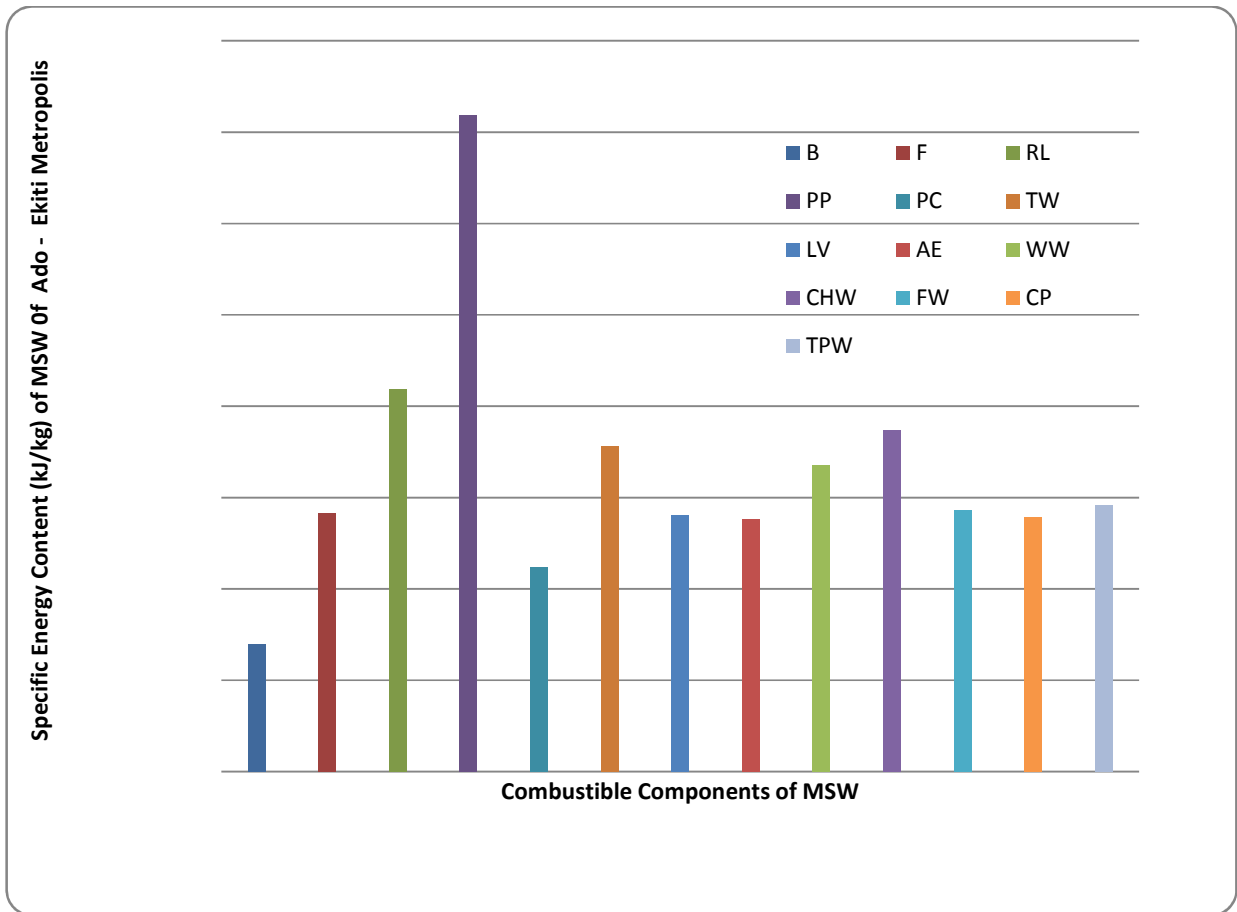


Fig.3.1: Bar Chart of Specific Energy Content of Components of the Municipal Solid Waste (MSW) in Ado- Ekiti, Ekiti State.

It can be easily deduced directly from both table 3.4 and fig.3.1 that the polythene products waste have the highest calorific value of 35,959.00 kJ/kg, next to this is rubber and leather of 20,946.52 kJ/kg. Also, charcoal waste has a heating value of 18,711.70 kJ/kg and textiles waste have a heating value of 17,800.48 kJ/kg. The wood waste has a specific energy content of 16,795.96 kJ/kg. Tuberous peels waste generated in Ado-Ekiti, is of 14,574.95 kJ/kg. The fruit waste and food waste were of 14,328.96 kJ/kg and 14,176.14 kJ/kg respectively. Leaves and vegetables waste have the specific energy content of 14,069.37 kJ/kg. Also, the other two components of the waste samples found during sorting of the municipal solid waste were Coconut and palm kernel waste, Animal dung and Excreta of 13,944.80 kJ/kg and 13,848.16

kJ/kg respectively. The least specific energy content of 6,994.39 kJ/kg was found in bones waste generated in Ado-Ekiti, Ekiti State. The average quantity in Tonnes of the waste generated in Ado-Ekiti is 300 Tonnes/day (Ekiti State Waste Management Board , 2014)

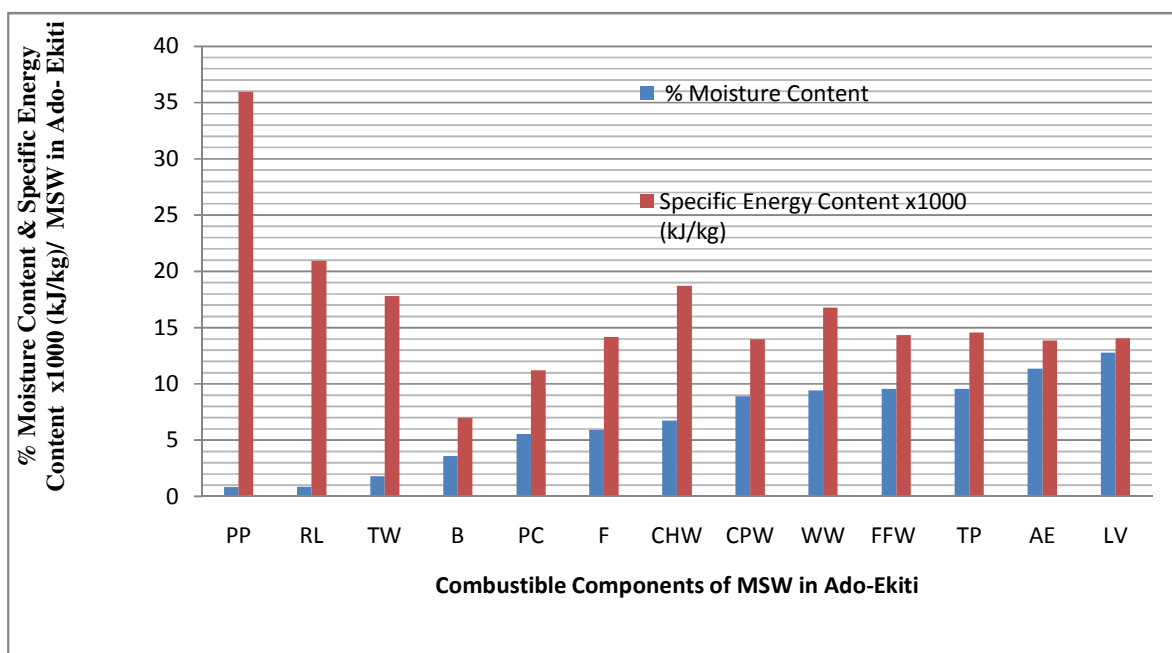


Fig.3.2: Variation of % Moisture Content with Specific Energy Content(kJ/kg) of Combustible Components of MSW in Ado -Ekiti ,Ekiti State

It can be inferred from the result of moisture content determination in the fig.3.2 that the lower the moisture content of the municipal solid waste above , the higher the specific energy content. Polythene products waste have the least moisture content of 0.82% hence the higher calorific value of 35,959.00kJ/kg, rubber and leather has a moisture content of 0.86% with the corresponding specific energy content of 20,946.52kJ/kg. The leaves and vegetable waste have the moisture content of 12.79% and specific energy content of 14,069.37kJ/kg.

Table 3.5: The Combustible Components of Municipal Solid Waste Generated (kg/day) and the Energy Content (kJ/day)

S/N	Combustible Components	% Composition	Quantity MSW generated (kg/day)	Specific Energy Content (kJ/kg)	Energy Content (kJ/day)	Electricity Generation Potential (MW)
1	Bones	3.73	11,190	6,994.39	78,267,224.10	0.91
2	Food waste	9.76	29,280	14,176.14	415,077,379.20	4.80
3	Rubber and Leather	3.71	11,130	20,946.52	233,134,767.60	2.70
4	Polythene Products waste	12.62	37,860	35,959.00	1,361,407,740	15.76
5	Paper and Cardboards	8.14	24,420	11,210.00	273,748,200.00	3.17
6	Textiles waste	4.36	13,080	17,800.48	232,830,278.40	2.69
7	Leaves and Vegetables	8.39	25,170	14,069.37	354,126,042.90	4.10
8	Animal dungs and Excreta	5.83	17,490	13,848.16	242,204,318.40	2.80
9	Wood waste	5.20	15,600	16,795.96	262,016,976. 00	3.03
10	Charcoal	1.35	4,050	18,711.70	75,782,385. 00	0.88
11	Fruit waste	12.53	37,590	14,328.96	538,625,606.40	6.23
12	Coconut and Palm kernel waste	1.13	3,390	13,944.80	47,272,872. 00	0.55
13	Tuberous peels waste	7.66	22,980	14,574.95	334,932,351 .00	3.88
Total		84.41	253,230	213,360.43	4,449,426,141.00	51.5

Total Energy Content(MJ/day)

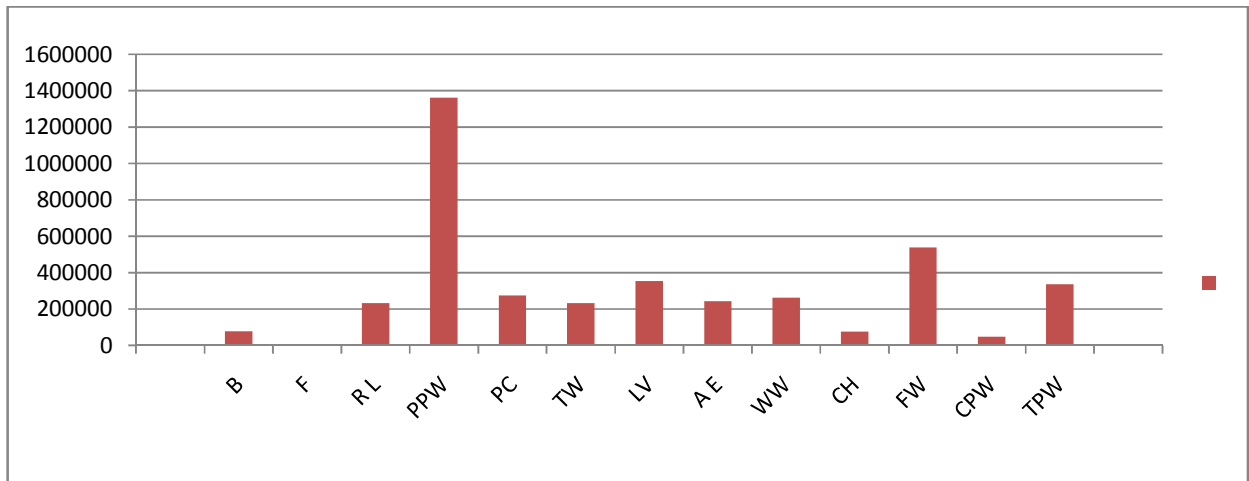


Fig. 3.3 : Total Energy Content of the Municipal Solid Waste (MSW) Components in Components of the Combustible MSW in Ado- Ekiti, Ekiti State

$$\bar{E} = \frac{\sum q_i h_i}{\sum C} \quad (3.4)$$

Where : \bar{E} is the Mean Specific Energy Content of the Combustible Components of MSW

q_i is the Quantity of each combustible components of MSW in (kg/day)

h_i is the Specific Energy Content (kJ/kg) of the Combustible Components of MSW

C is the Quantity of Biogenic and Non Biogenic Combustible MSW generated per day (kg/day)

$$\bar{E} = \frac{4,449,426.141}{253,230} \text{ (MJ/day)}$$

$$\bar{E} = 17.57 \text{ MJ/day}$$

$$\text{Electricity Generation Potential} = \frac{H}{24 \times 3600 \times 1000} \text{ (MW)} \quad (3.5)$$

Where H is the Total Energy Content (kJ/day) of the Combustible Components of Municipal Solid Waste (MSW).

$$\text{Electricity Generation Potential} = \frac{4,449,426,141.00}{24 \times 3600 \times 1000} \text{ (MW)}$$

$$\text{Electricity Generation Potential} = 51.50 \text{ MW.}$$

When the municipal solid waste stream in Ado-Ekiti is completely burnt per day to produce steam 51.50 MW of electricity can be generated

4.0 CONCLUSION

1.The values of the energy content obtained indicated that, there is prospect in the huge potentialenergy that exist in the MSW and this when combined with appropriate energyrecovery technology will make the thermal treatment plants to become net producers of renewable energy to address the problems of acute shortage of the conventional non-renewable energy crisis currently being witnessed in the country and also resource recovery is possible to a great economic advantage.

2.Waste which often creates a nuisance to the environment can be converted to wealth with appropriate technology.

4.1 RECOMMENDATION

Polythene products waste has the highest calorific value hence a high potential to produce steam to generate electricity which can woo the investors to the state due to cheap and reliable source of electrical supply to power their machines which can go in a long way to fast-track the industrial development in the young state capital and its environs.

REFERENCES

- Adeyemi A. S., Olorunfemi J. F. and Adewoye T. O. (2004); Waste scavenging in third World cities: A case study of Ilorin, Nigeria, The Environmentalist, 21(2), 2004, 93-96. Springer Netherlands.
- Aguilar-Virgen Q., Armijo-de Vega C., P.A. Taboada-González and S. Ojeda-Benítez, (2010); Municipal Solid Waste Generation and Characterization in Ensenada, Mexico; The Open Waste Management Journal, 3, 2010, 140-145.
- American Plastic Council. 2000. Plastics from Residential Electronics Recycling Report 2000.
- Daren, F., Laurence E. Allen and Michael B. Biddle., (1996):Plastic Recovery from Electrical and Electronic Durable Goods: An Applied Technology and Economic Case Study MBA Polymers, Inc, Plastic Council MBA Polymers, Inc, Michael B.Fisher.
- DaskalopoulosBadr O. and Probert S., (1998): An Integrated Approach to Municipal Solid Waste Management, Journal of Resources, Conservation and Recycling, 24(1), 33-50.

- 250 Diso I. S.,(1995):Waste Management Survey in Kano, The Energy Team Bayero
251 University Kano, Report submitted to the Kano State Government.
252 .
- 253 Ekiti State Waste Management Board (EKWMB), (2014):Verbal Discussions with Director
254 of
255 Operations on the Average Gravimetric Composition of the Municipal Solid Waste in
256 Ado – Ekiti, Ekiti State.
- 257
258 Gupta, O.P, (2010) : Elements of Fuel and Refractories, Pp 35-36, 73 - 75
259
- 260 Ikuponisi, F.S.,(2006): Status of Renewable Energy in Nigeria, An international
261 Conference on making renewable Energy a Reality. One Sky- Canadian
262 Institute of Sustainable Living, 21-27.
263
- 264 Jekayinfa, S. O. and Omisakin, O. S.(2005): The energy potentials of Some
265 Agricultural Wastes as local Fuel materials in Nigeria, Agricultural
266 Engineering International: the CIGR Ejournal.Vol.VII. May 2005,
267 Manuscript EE 05 003.
268
- 269 Mengiseny E. Kaseva and Josia L. Moirana, (2010): Problems of solid waste
270 management on Mount Kilimanjaro: A challenge to tourism. Waste
271 management and Research,695-704.
272
- 273 Ogaji S. O. T., et al.,(2006): Municipal solid-waste in Port Harcourt, Applied
274 Energy, 84(6), 2006.
275
- 276 Oyinlola, A.K; (1998): waste preserves and Recycling Proceedings of Urban Solid Waste
277 Management Scheme, Abuja 22nd-25th November 1998, pp152.
278
- 279 Rominiyi, O.L ,(2006): Categorization of Municipal Solid Waste in Ado-Ekiti, Ekiti
280 State.B.Eng Research Project , Department of Mechanical Engineering, University
281 of Ado-Ekiti ,Nigeria.
282
- 283 Rominiyi, O.L (2015): Evaluation of Energy Content of the Municipal Solid Waste
284 in Ado-
285 Ekiti, EkitiState , Department of Mechanical Engineering, Federal University of
286 Technology, Akure, Nigeria.M.Eng Research Thesis (Unpublished).
287
- 288 Vanden Brook and Kirov,(1972); The Characterization of Municipal Solid Waste in Kirov,
289 1972 Pp 23- 29, Department of Fuel Technology , University of South Wales,
290 Australia
291
292 www.springer.com/978-14471-2371-2