

Design and Evaluation of Household Horizontal Slow Sand Filter

Haile ArefayneShishaye
Haramaya University, Ethiopia
Email: haile.4.hiwot@gmail.com

Abstract

Slow sand filtration has been recognized as an appropriate technology for drinking water treatment in rural areas, and is recognized as a suitable filtration technology in reducing turbidity and coliform concentrations. It is capable of improving the physical, chemical, and microbiological quality of water in a single treatment process without the addition of chemicals, and can produce an effluent low in turbidity and free of bacteria. The objective of this study was thus to develop a household-scale horizontal slow sand filter (HSSF) with a low-cost treatment process, which can be operated and maintained by a member of the families. It therefore involves obtaining different grain sizes of sand as a filter media and water quality data from laboratory after filtering the water in different slopes of the HSSF tool. So, the primary product of this project was the developed recommendations and design criterias for the use of HSSF technology to improve water quality. Accordingly, the developed tool was found capable to produce remarkable results in removing turbidity and coliform concentrations in water. The average percent removal of coliforms was found to be 100% with effect from the 9th day; while, turbidity had become within the permissible limit in the first day of filtration.

Key Words

Slow sand filter; Water Quality; Microbiological Analysis; Physico-Chemical Analysis

1. Introduction

Water is not only a basic need but also a human right[1,2]. According to different literatures [3, 4], approximately one billion people worldwide lack access to adequate amounts, and clean and safe water; while, 2.2 million people die of waterborne diseases, such as diarrhea [5].

Whilst attempts have traditionally focused on providing centralized systems for water treatment and distribution, there are millions of people who already have abundant access to water but depend on rivers, streams and other unsafe water sources [3, 6]. The implementation of municipal water treatment systems can be impractical and costly due to dispersed populations and poor transport infrastructures in many rural areas. Therefore, low cost community water treatment systems are reasonable alternatives [4].

Interest in household water treatment technology has grown significantly over recent years as studies have concluded that these simple low-cost household interventions may be as effective at preventing diarrhea as other environmental approaches, such as improved sanitation, hygiene and improved water supply [7-9]. The increasing importance of such systems is also highlighted through the creation by the WHO of the International Network to Promote Household Water Treatment and Safe Water Storage, to support study and dissemination of both existing and developing technologies.

The slow sand filter (SSF), one of such technologies, developed by Dr. Eric Mantz at the University of Calgary, in 1976, Canada, has been successfully introduced to many countries of the world. The technology demands little maintenance, is primarily managed at the household level and has been demonstrated to significantly reduce the potential for diarrheal disease. For the first few years after introduction, most studies of the filter have been limited to the laboratory and very little research exists which explores their long-term performance and suitability. Years later, slow sand filtration was proved to be the first water treatment process introduced to improve the quality of surface water and soon also proved to provide protection against waterborne diseases. Thus, it has remained a suitable treatment technology throughout the world and is recognized as particularly appropriate for application in developing countries due to the simplicity of its design and construction and the ease of operation and maintenance.

However, the widely used type of slow sand filter is the vertical slow sand filter; while, it is known that the flow in vertical slow sand filter is relatively faster than that of the horizontal slow sand filter, for the head of water added at the top of the filter has its own pressure[10].

Moreover, the faster the flow within the filter results less quality of filtered water. Thus, a tool that slows the flow of water within the filter and increases the filtration capacity is very important in such a case. The objective of this study was therefore to develop a horizontal slow sand filtration technology with a relatively better filtration capacity, and which is a low-cost water treatment process that can be operated and maintained by a member of the families. More specifically, the project was aimed to:

- ❖ Developing affordable, socially acceptable and effective horizontal slow sand filter (HSSF).
- ❖ Evaluate the efficiency of HSSF in reducing turbidity and microbiological concentrations of drinking water during lab analysis.
- ❖ Recommend adequate maintenance procedures that could be used by communities.
- ❖ Suggest any additional program components, which might aid the long term sustainability of the filtration process.

2. Materials and Methods


2.1. Design of HSSF Tool

The design of the HSSF sections was made using AutoCAD, version 2007. As shown in Fig. 1, the design of the sand filter has five sections, i.e., sections for the storage, gravel, coarse sand, medium sand and very coarse sand. The storage section is laid above the gravel container. Therefore, when the turbid water comes from the top to the gravel storage, the gravels help to disperse the water and to filter some of the large size dirt. Then, once water got dispersed by the gravel, pathogens are expected to be removed from the water through the filtration process and the coarse sand starts the serious filtration process. Finally, the turbid water passes through the medium sand section (filter media) and gets filtered well. At the end, very coarse sand section is used to prevent clogging of the outlet by the medium sand.

2.1.1. Filter Components

The dimensions of the filter components used in this study are purely experimental with the objective to design the filtration system of household horizontal slow sand filter. The essential components of the filter unit have 100cm tire leg from the ground, and also it has sieves dividing the grains from each other (Fig.1). The tank filter as a whole is divided into four places by 40cm width, 20cm height and 22cm length each (Fig.1). Moreover, the sizes of the sieves that are dividing the sections from each other are selected based on the grain sizes. For

83 instance, the sieve size that is dividing the gravel and coarse sand is 1mm in diameter.
 84 Therefore, the sieve protects the coarse sand from coming back to the gravel section.

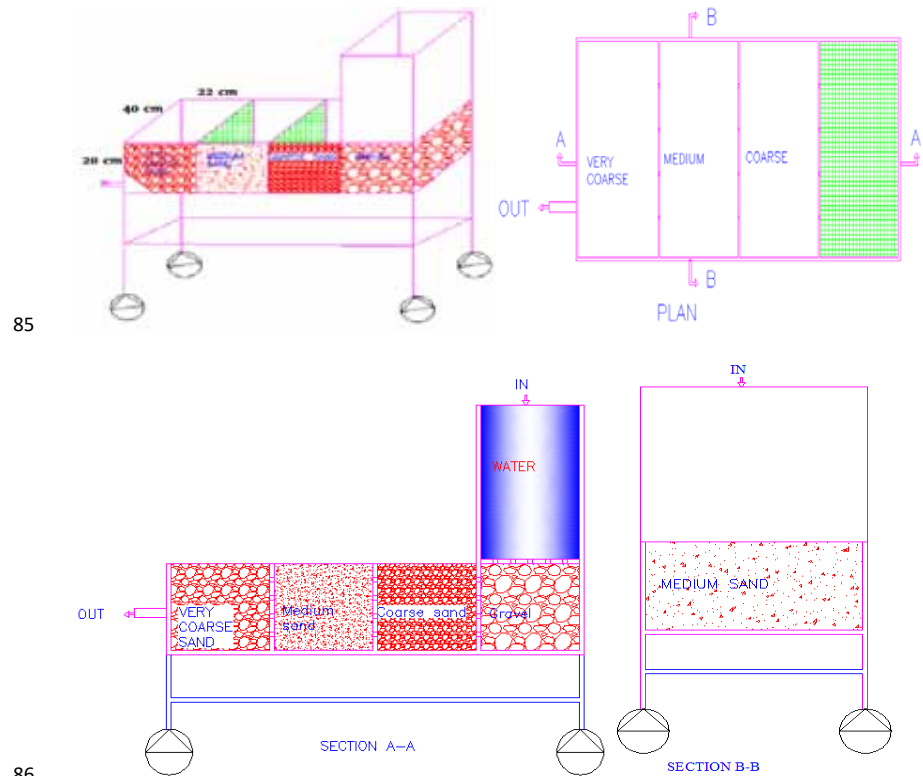

86
 87 **Figure 1: Horizontal slow sand filtration tool sections/views**

88 **2.1.2. Flow Rate**

89 Filter flow rates were measured in different grades/slopes of the HSSF. Flow rates were
 90 measured by filling the filter to a level approximately 10 centimeters into storage at the inlet
 91 part. Discharged water was collected in a half-liter plastic bottle. The time required for 500
 92 ml of water to flow through the filter was thus recorded, and the rate was determined for each
 93 grade. The rates were therefore calculated using the following equation:

$$Q = \frac{V}{t}$$

94 Where, Q is flow rate in L/s, V is volume in L and t is time in second

95 2.2.Sand and Gravel

96 A sample of sand taken from a source will not consist of uniformly sized grains but contains
97 a range of grain sizes. Sand was taken from a source (gully sand bank), then washed by
98 agitating it in running water to remove excessively fine grains and organic materials before
99 shaking. The sand was dried thoroughly before testing. As RedR recommended "sand used in
100 slow sand filters should have an effective size of 0.15 – 0.35 mm and a uniformity coefficient
101 of 1.5 – 3; however, < 2 is desirable. Preferably, the sand should have rounded, rather than
102 jagged grains and be free from clay. Hence, sand from streams and rivers is normally better
103 suited to slow sand filters than sand from pits.

104 The sand was then sieved to obtain sand grains that could be used as filter media. A mesh
105 with very small openings was used to prevent the sand clogging, the opening through which
106 the water passes from one media to another sand media and the gate valve. Gravel, in two
107 different sizes, was obtained by sieving the sample. Particle size of sand was known after
108 sieving, and the range of particle size distribution was classified based on USDA sand
109 classification system (Table 1).

110 **Table 1: USDA sand classification system**

Types of sand sample	Particle size range (mm)
Gravel	2 – 4
Very coarse sand	1 – 2
Coarse sand	0.5 – 1
Medium sand	0.25 – 0.5
Fine sand	0.1 – 0.25
Very fine sand	0.05 – 0.1

111 2.3.Characterizing Sand Samples

112 Sieve analysis was used to characterize the sand samples. Advantages of the sieve analysis
113 include: easy handling, low investment costs, precise and reproducible results in a
114 comparably short time and the possibility to separate the particle size fractions. Therefore,
115 this method is an accepted alternative than analysis methods using laser light or image
116 processing.

117 To guarantee a high degree of reproducibility and reliability, sieve shakers and accessories
118 have to fulfill the requirements of national and international standards. This means that test
119 sieves, sieve shakers and all other measurement instruments which are used for the
120 characterization of particle distributions have to be calibrated and subjected to test agent

121 monitoring as part of the quality management system. Apart from that, it is necessary to carry
122 out the sample preparation with great care. Only then is it possible to achieve sieving results
123 which allow a reliable characterization of a product. Two quantities are needed to characterize
124 the sand sample:

- 125 • Effective particle size – this is the particle diameter such that 10% (by weight) of the
126 grains in the sample are smaller than it and 90% of grains are larger than it. The
127 effective particle size is therefore referred to as D_{10} .
- 128 • Uniformity coefficient – this is a method of expressing the size differences between
129 the largest and smallest grains in the sample (also known as the particle size
130 distribution). The uniformity coefficient is defined as the ratio of D_{60}/D_{10} . Like D_{10} ,
131 D_{60} is the particle size whereby 60% of the samples grains are smaller and 40% are
132 larger.

133 Thus, the standard sieve analysis procedures and apparatus were used in this analysis (Fig. 2).



Figure 2: Grain Size Analysis

2.4. Water Sampling Procedures and Analysis

138 The water samples were analyzed for various parameters in the laboratory. Various physical
 139 and chemical parameters like Temperature, pH, Turbidity, TDS and EC have been measured
 140 both from the original water and filtered water samples of different grades/slopes of filtration
 141 instrument (Fig. 3). Moreover, samples were also analyzed microbiologically.

142 Plastic bottles of 2.0 liter capacity were used for collecting samples. Each bottle was washed
 143 with distilled water. The bottles were then preserved in a clean place. The bottles were filled
 144 leaving no air space, and then sealed to prevent any leakage. Each container was clearly
 145 marked with the name and date of sampling.



146

147 **Figure 3: Water samples filtered with different slopes of the sand filter**

148 **2.4.1. Drinking Water Quality Standards**

149 The results of the analyzed parameters of filtered water of the different grades of HSSF were
 150 compared with the related standards for drinking water [11, 12]. The drinking water standards
 151 are given in the table 2.

152 **Table 2: Drinking Water Standards (WHO 2006)**

S/No.	Parameters	Permissible value
1	Color	Unobjectionable
2	Taste	Agreeable
3	pH	6.5-7.5
4	Turbidity(Max NTU)	5
5	TDS	500
6	TSS	5
7	BOD	Nil to 5

8	DO	4.0-6.0
9	Total hardness	300
10	Chloride	250
11	Alkalinity	120
12	Residual chlorine	0.2

153 NB: Except pH and turbidity other parameters are in mg/l.

154 **2.4.2. Methodology for the Measurement of TemperatureTurbidity, pH, EC and** 155 **TDS**

156 The parameters considered in this study, Temperature, Turbidity, pH, EC and TDS, were
157 measured following the standard procedures [13].

158 **2.4.3. Microbiological Test**

159 A filtered sample from the filter with a 5% slope and the pre-filtered sample were taken to the
160 microbial test. The 70188 Violet Red Bile Agar (VRB-Agar) and Peptone Bacteriological
161 reagents were used in the laboratory tests. In our case, 9.625 mg of VRB-Agar and 3.75 mg
162 of Peptone were weighed first in an electrical balance. Then, they were addedto separate
163 glasses and mixed with 250 ml of distilled water each. The VRB-Agar was thus boiled at a
164 100 °C; while, the Peptone mixture was autoclaved at a 121 °C in an autoclave machine. So, 1
165 ml of sample from each of the 3 samples were taken and placed to separate tubes and diluted
166 to a 10⁻¹ and 10⁻² dilution with a 9 ml each of the Peptone mixture. The analysis was in a
167 duplicate analysis type. Finally, 1 ml of each of thediluted and original samples was taken to
168 a plate where the microbes can grow and 10-15 ml of the VRB-Agar was added to each of the
169 plates. The plates were then placed to an incubator with a 32 °C temperature. Counting was
170 finally conducted after 48 hours of period.

3. Result and Discussion

3.1. Grain Size Analysis


Sieve Analysis:

- (1) The mass of sand retained on each sieve was obtained by subtracting the weight of the empty sieve from the mass of the sieve + retained sand, and this mass was recorded as the weight retained on the data sheet. The sum of these retained masses should approximately be equals the initial mass of the sand sample. A loss of more than two percent was considered as unsatisfactory.
- (2) The percent retained on each sieve, by dividing the weight retained on each sieve by the original sample mass, was therefore calculated.
- (3) The percent passing (or percent finer) was finally calculated by starting with 100 percent and subtracting the percent retained on each sieve as a cumulative procedure. The overall calculation results are shown in table 3. A semi logarithmic plot of grain size vs. percent finer was finally prepared as shown in Fig. 4.

Table 3: Grain size analysis

Sieve Number	Diameter (mm)	Mass of Empty Sieve (g)	Mass of Sieve+ Sand Retained (g)	Sand Retained (g)	Percent Retained	Percent Passing
5	4	604.36	619.74	15.38	2.25	97.75
10	2	560.46	714.85	154.39	22.61	75.14
20	0.85	503.63	787.63	284	41.62	33.52
30	0.6	496.51	548.03	76.52	11.21	22.31
60	0.25	448.97	486.22	62.25	9.12	13.19
140	0.106	429.80	441.83	37.03	5.43	7.76
230	0.063	347.23	360.27	38.04	5.58	2.18
Pan	-	578.13	592.9	14.77	2.18	0.00

*Percent passing=100-cumulative percent retained.

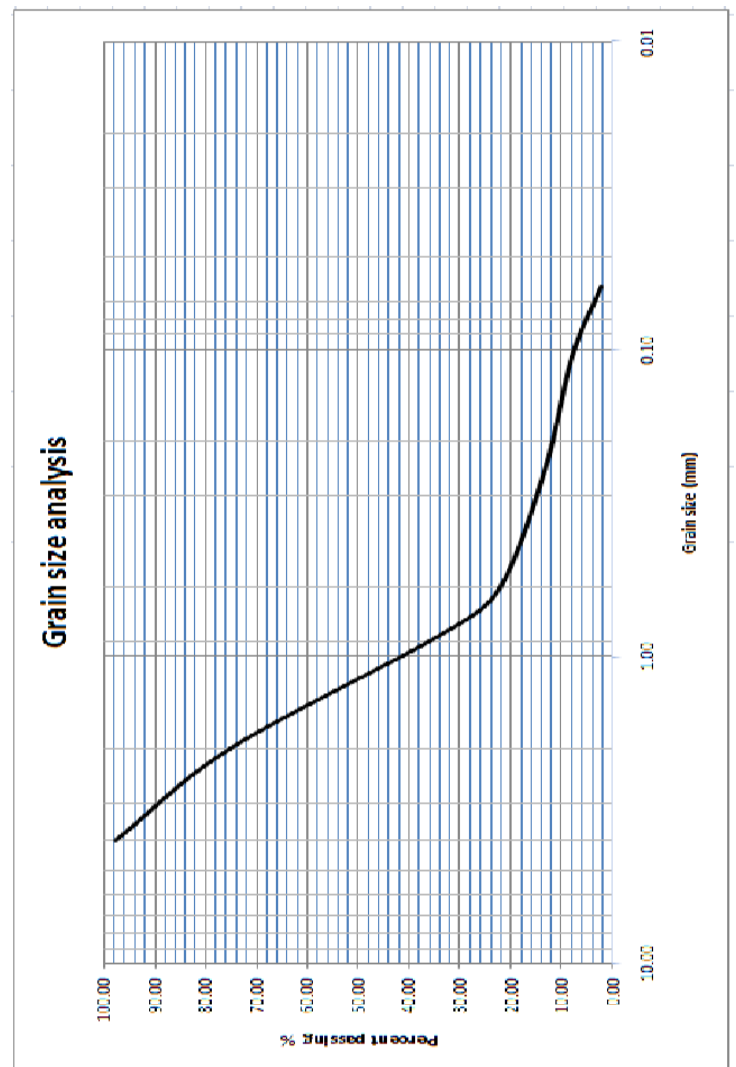

187

188 **Figure 4: The semi-logarithmic graph of grain size vs. percent finer**

189 (4) C_c and C_u for the sand were also computed as:

190 $C_u = D_{60}/D_{10} = 1.5/0.17 = \underline{8.82}$

191 $C_c = D_{30}^2 / D_{60} * D_{10} = 0.8^2 / 0.17 * 1.5 = \underline{2.51}$

192 ➤ The sand we used as a filter media in this HSSF has an effective size of 0.17
193 mm and a uniformity coefficient of 8.82.

3.2.Flow Rates Analysis

Flow rates were found to increase with the increase in grade/slope. The highest flow rate was found at 30% grade with an average rate of 0.022 L/s. In contrary, the lowest flow rate was found at a 5% grade, averagely 0.011 L/s. The average flow rates of the filter tested using all grades are shown in Table 4.

Table 4: flow rates with different grades of HSSF

S/No	Grades/slope (%)	Flow rates (L/s)
1	5	0.011
2	10	0.013
3	20	0.015
4	30	0.022

3.3.Water Quality Analysis

3.3.1. Temperature

The temperature values of the filtered water samples were found to be within the permissible limits (Table 5).

3.3.2. Turbidity

Measurement of Turbidity reflects the transparency in water. It is caused by the substances present in suspension in water. In natural water, it is caused by clay, silt, organic matter and other microscopic organisms. In our case, turbidity was found to range from 3.93 to 75 NTU. However, the prescribed limit of turbidity for drinking water is 5 NTU [11, 14]. Turbidity was not found within the permissible limit in the filtered water samples with the grade/slope value greater than 10% (Table 5). It is also obvious that the filtration capacity of a sand filter increases with the increase in filtration days, for the filtered dirt will increase the filtration capacity of tool. However, in our case, the turbidity value of the sample had become within the permissible limits in the first day of experiment. So, we didn't continue testing for turbidity up to the 10th day of experimentation.

3.3.3. The pH Value

The pH is a measure of the intensity of acidity or alkalinity and measures the concentration of hydrogen ions in water. It has no direct adverse effect on health; however, a low value, below 4.0 will produce sour taste and higher value above 8.5 shows alkaline taste. A pH range of 6.5 – 8.5 is normally acceptable as per the guidelines suggested by different organizations

[11]. In this study, the fluctuation of pH in the samples was found to range from 6.80 to 7.06, which is within the standard.

3.3.4. Total Dissolved Solids (TDS)

TDS may be considered as a salinity indicator for the classification of water samples. The TDS in water is due to the presence of Calcium, Magnesium, Sodium, Potassium, Bicarbonate, Chloride and Sulphate ions. The TDS of the filtered water, in our case, was found to vary from 190 to 464 mg/l and that of unfiltered water was 500. While, the prescribed limit of TDS for drinking water is 500 mg/l, all the water samples had TDS concentrations below the prescribed limit.

Table 5: Laboratory results of filtered water parameters with different grades of HSSF

S/No.	Grades	Parameters				
		T° (°C)	Turbidity (NTU)	pH	EC (µs)	TDS (mg/l)
1	5%	22.1	3.93	7.06	283.00	190.00
2	10%	21.7	4.90	6.92	314.00	210.00
3	20%	21.6	49.00	6.85	382.00	256.00
4	30%	21.5	55.50	6.82	692.00	464.00
5	Pre-filtration	21.0	75.00	6.80	745.00	500.00

Finally, HSSF was found to be very effective in removing total turbidity, and able to decrease EC and TDS of water. Filtration using HSSF with 5% and 10% grades showed safe values for drinking purposes; while, filtering at 5% slope is very effective.

3.3.5. Microbiological Analysis

HSSF is a highly biologically active unit; therefore, the filter has to be operated for several days to develop a biological film (schmutzdecke) on the grain of the filter until the purifying bacteria become well established and plays an important role in the treatment process [15-17]. According to Bellamy et al. [18], the biological conditions governing the effectiveness of the slow sand filter are the degree of scum formation and the microbiological maturity of the sand bed.


In this study, the microbial quality was monitored for 10 consecutive days, and samples had been collected both from the influent and effluent. It was observed that the qualities were improved and potable water was achieved after the 9th day of experimentation. The HSSF, in this experiment, was provided with a 5% slope. This was made purposely to increase the flow rate from the filter. The microbial analysis results are therefore presented in the table below

245 and Fig. 5. According to the results shown in Table 6 and Fig. 5, HSSF was found to be
 246 effective in removing coliform bacteria as well.

247 Table 6: Coliform test results

Day	Influent Conc.(Average) - cfu/100mL	Effluent Conc.(Average) - cfu/100mL
1	Unable to count (more than 300)	177
2	Unable to count (more than 300)	70
3	Unable to count (more than 300)	49
4	Unable to count (more than 300)	36
5	Unable to count (more than 300)	28
6	Unable to count (more than 300)	15
7	Unable to count (more than 300)	08
8	Unable to count (more than 300)	02
9	Unable to count (more than 300)	0.0
10	Unable to count (more than 300)	0.0

248

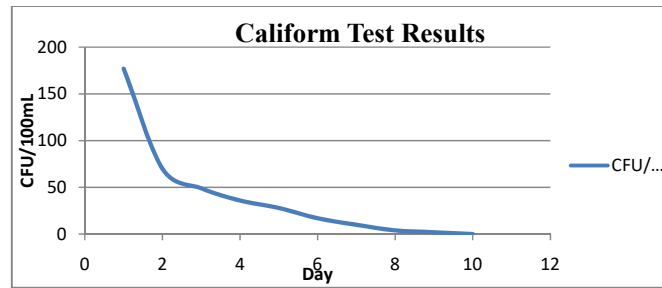

249

250 Figure 5: Coliform Test Results

251 In general, HSSF was found to be very effective in removing turbidity and coliforms. The
 252 average percent removal of coliforms was found to be 100% with effect from the 9th day.
 253 This is therefore in agreement with the findings of Ellis and Bellamy et al. [15,18]. Therefore,
 254 developing a household HSSF would help in protecting the people from waterborne diseases.

255 **4. Conclusions and Recommendations**

256 In conclusion, slow sand filtration has been recognized as an appropriate technology for
257 drinking water treatment in rural areas, and is recognized as a suitable filtration technology in
258 reducing turbidity and coliform concentrations. It is capable of improving the physical,
259 chemical, and microbiological quality of water in a single treatment process without the
260 addition of chemicals, and can produce an effluent low in turbidity and free of bacteria.

261 In this study, the efficiencies of the HSSF at laboratory level in removing total turbidity and
262 coliform bacteria were evaluated. Water analyses from the influent using HSSF with 5% and
263 10% grades showed that it is safe for drinking purpose, from turbidity and flow rate required
264 to satisfy family need points of views. Moreover, the filter was able to remove coliforms
265 100% at the 9th day of analysis and monitoring. Thus, the baseline information generated from
266 this study may contribute to develop a household-scale HSSF with a low cost water treatment
267 process which can be operated and maintained by a member of the families.

268 Based on the findings, the following recommendations can be formulated:

- 269 • On the basis of this research, HSSF is an attractive option for supplying water treatment
270 to family units in rural areas of developing countries.
- 271 • Decreasing the size of filter media from medium sand to fine sand and increasing the
272 length of the filter are suggested to improve the filtration capacity.
- 273 • Education about waterborne diseases, sanitation and hygiene should accompany during
274 the installation of the filter.
- 275 • Any shortcomings of the HSSF are likely best addressed by user education about the
276 operation, maintenance and proper monitoring of the filter media preparation and
277 installation, and of fundamental hygiene practices, but the basic principles of the
278 technology are sound.

279 **5. References**

- 280 1. United Nations Water Conference, 1977, In report of the United Nations Water
281 Conference, International Environmental Law Research center, Mar del Plata, 15-25
282 March 1977, (UN publication, Sales Number E.77.II.A.12).
- 283 2. WHO, 2002, 25 Questions and answers on health and human rights, Geneva, World
284 Health Organization, available at <http://www.who.int/hhr/information>.
- 285 3. Sobsey, M., 2004, Evaluation of the Biosand Filter for reducing risks of diarrhoeal
286 illness and improving drinking water quality in communities in The Dominican
287 Republic, University of North Carolina.
- 288 4. Duke, W., Mazumder, A., Nordin, R. & Baker, D., 2006, The use and performance of
289 Biosand Filters in the Artibonite Valley of Haiti: A field study of 107, households.
290 *Rural and Remote Health*, 6:570.
- 291 5. PSI, 2006, Disinfecting water, saving lives: Point-of-use safe water products prevent
292 diarrhoea and improve family health, PSI Services International, Washington.
- 293 6. Dejachew, G., 2002, Evaluation of household BioSand Filters in Ethiopia, Water
294 Engineering and Development Centre, Loughborough University.
- 295 7. Clasen, T., Roberts, I., Rabie, T., Schmidt, W. & Cairncross, S., 2006, Interventions to
296 improve water quality for preventing diarrhoea *Cochrane Database of Systematic*
297 *Reviews* 2006, Issue 3. Art. No.: CD004794. DOI:
298 10.1002/14651858.CD004794.pub2.
- 299 8. Barbier, J.M., 1992, Paris Improves Its Drinking Water Treatment Plants, *Journal*
300 *Institute of Water and Environmental Management*, vol. 6 (3), p.2.
- 301 9. Cleasby, J.L., Hilmo, D.J., and Dimitracopoulos, C.J., 1984, Slow Sand Filtration
302 and Direct In-Line Filtration of a Surface Water, *Journal of American Water Works*
303 *Association*, vol. 76 (12), pp. 44-60.
- 304 10. Fox, K. R., Miltner, R.J., Logsdon, G.S., Dicks, D. L. and Drolet, L. F., 1984, Pilot-
305 plant studies of Slow –Rate Filtration, *Journ, AWWA*. 76 (12), pp.62-68.
- 306 11. WHO, 2006, Guidelines for drinking-water quality, third edition, incorporating first
307 and second addenda, volume 1 – recommendations, Geneva.
- 308 12. Graham, N. J. D., and Collins, M. R., 1996, Advances in slow sand and alternative
309 biological filtration, Chichester, New York, John Wiley & Sons.

- 310 13. Shishaye, H.A., Nagari, A. 2016 Hydrogeochemical Analysis and Evaluation of the
311 Groundwater in the Haramaya Well Field, Eastern Hararghe Zone, Ethiopia. J
312 HydrogeolHydrolEng 5:4.
- 313 14. Haarhoff, J. and John, L. C., 1991, Biological and Physical Mechanisms in Slow Sand
314 Filtration, Slow Sand Filtration, Gary Logsdon, ed. American Society of Civil
315 Engineers, New York.
- 316 15. Ellis, K., 1985, Slow Sand Filtration, CRC Critical Review in Environmental Control,
317 Vol. 15(4), pp.315-354.
- 318 16. Hazen, A., 1913, The filtration of public water-supplies, New York: J. Wiley.
319 Huisman, L., & Wood, W. E. 1974, Slow sand filtration. Geneva; Albany: World
320 Health Organization.
- 321 17. Logsdon, G. S., and American Society of Civil Engineers 1991 Task Committee on
322 Slow Sand Filtration, Slow sand filtration: A report. New York.
- 323 18. Bellamy, W.D., Silvennan, G.P., Hendricks, D.W., and Logsdon, G.S., 1985,
324 Removing Giardia Cysts with Slow Sand Filtration, J. AWWA, Vol. 77, (2), pp.52-60.
325