

Risks Associated with Radio-frequency Radiation Exposure at Close Proximities to Mobile Phone Base Stations in Port Harcourt, Rivers State, Nigeria.

Nte Felix U¹., Avwiri Gregory O¹., Esi Oghenevovwero .E^{2*}. and Akpata Chinelo¹.

¹Department of Physics, University of Port Harcourt, Choba, Rivers State, Nigeria.

²Department of GNS (Physics unit), Delta State School of Marine Technology, Burutu, Delta State, Nigeria

E-mail: esiemmanuel@yahoo.com

ABSTRACT

This paper evaluates risks associated with Radio-frequency radiation exposure at close proximities to Mobile Phone Base Stations in Port Harcourt, Rivers State, Nigeria. It involved the use of RF field strength meter, a portable meter with a GPS. Clusters of telecommunication base stations in Port Harcourt were selected for this study, which are located in Rumuokoro, Mile 3, Garrison and Mile 1. The readings were taken from 5 m to 400 m from the telecommunication base stations (masts) in the north, south, east and west directions at about 1.0m above the ground. The power density obtained ranged between $0.121\mu\text{W}/\text{cm}^2$ and $10.847121\mu\text{W}/\text{cm}^2$. The highest total power density and specific absorption rate were recorded at mile 1 location as $10.847\mu\text{W}/\text{cm}^2$ and $3,639.17\mu\text{W}/\text{kg}$ respectively. These results are below the standards stipulated by the International commission on non-ionizing radiation which is adopted by the Nigeria Communication Commission (NCC). The recommended permissible limits guidelines for safe frequencies between 400 and 2000 MHz, for occupational exposure is $22.5\text{ W}/\text{m}^2$, and general public is $4.5\text{ W}/\text{m}^2$ for 900 MHz. This means that at a distance of 5m to 400m away from the mast is safe according to these recommend permissible limit though there could be a long term effect on those residing at such distance permanently.

1.1 Introduction

The use of mobile phones in the transmitting of information have being of immense benefit to the 21st century society. Mobile phone usage in Nigeria started in 2001 after Nigeria Communications Commission gave licence to private telecommunication companies to establish in Nigeria. This also prompted the erection of Mobile Phone Base Stations (masts) to meet the communication demand. Mobile phone communication in Nigeria has made communications easy for people as they can now communicate with their distant relatives, friends and business partners easily. These clusters of telecommunication base stations are located around residential areas, schools, market places and office premises all around Port Harcourt and the populace living in such environment may be exposed to variable levels of electromagnetic fields (radiofrequencies), with respect to the distance from the telecommunication base stations (masts), the presence of passive structures to either amplify the wave or to shield them, the

number of transmission calls within the transmitters and their position with relationship to the orientation of the antenna (Santini *et al.*, 2000). In spite of the numerous advantages of this technology, there have been significant concerns about possible negative health effects from exposure of the public to radiofrequency (RF) electromagnetic fields mainly due to the proximity of the base stations (masts) to residential areas, office premises etc (Wolf and Wolf, 2004).

Some of the possible negative health effects from radiofrequency (RF) fields shown in scientific reviews have been related to an increase in body temperature from exposure at very high field intensity (W.H.O., 2006). There is also a concern about the effect of cumulative RF radiation resulting from continuous exposure. This has led to serious debates that this long term EM radiation exposure may lead to some diseases like cancer and leukemia. Reported effects resulting from EM radiation also include symptoms of sleep disorders, headaches, nervousness, fatigue, and concentration difficulties (EM Watch, 2011). Various researches has shown that there may be an association between some health effects and living very close to GSM base stations (Ayinmode and Farai, 2012; Hutter, *et al.*, 2006 and Santini, *et al.*, 2003).

Port Harcourt is a highly populated state headquarters that host several major and service-oriented oil companies with other industrial and manufacturing activities that demands high density network of telecommunication services that have necessitated massive deployment of telecommunication infrastructures with clusters of base stations. The need to estimate risks associated with radio-frequency radiation exposure at close proximities to mobile phone base stations in Port Harcourt, Rivers State, Nigeria and to protect the populace against side - effects of low- level non ionizing radiation lay credence to this study.

1.2. Study Area

The study area is Port Harcourt which is the capital of Rivers State, Nigeria. The city is located in the oil rich Niger Delta region, southern part of Nigeria. Port Harcourt is situated between Latitudes $4^{\circ} 30'$ north and $4^{\circ} 45'$ north and Longitudes $7^{\circ} 00'$ east and $7^{\circ} 15'$ east in the geographical map (Hart *et al.*, 2012). The City occupies about four hundred and seventy square kilometers 470.00sq km of land. According to the 2006 census, the population of the city is 1,000,908 persons (Hart *et al.*, 2012). The locations covered are Rumuokoro, mile 3, mile 1 and Garrison. The map of the Study area is shown in figure 1.

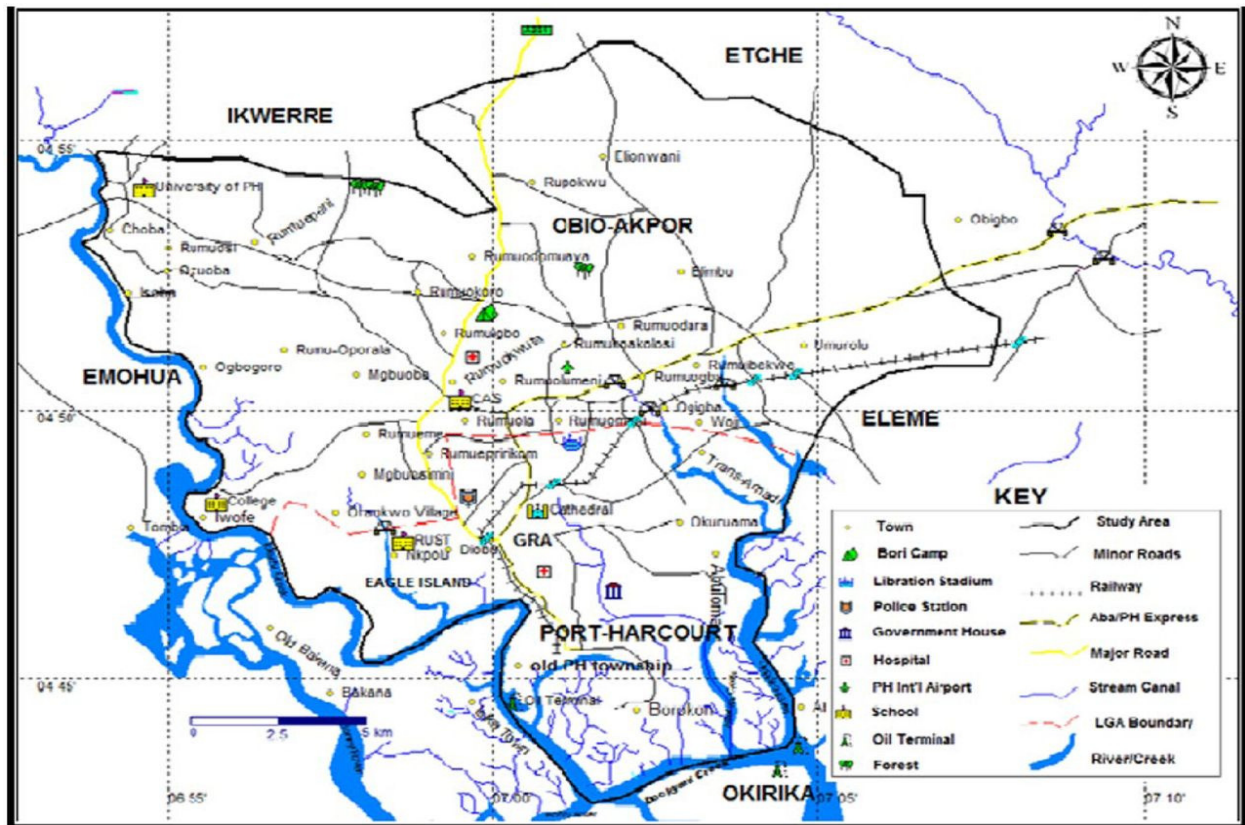


Fig. 1. Map of Port Harcourt City Showing Study Area (Google Maps, 2015)

2. Materials and Method

An in situ measurement approach was employed using a radiofrequency field strength meter (ALRF05 Model, Toms Gadgets). The measurement of the power density were taken at strategic distances (5m -400 m) away from the clusters of telecommunication base stations at the north, south, east and west directions at regular time daily. The GPS 76 (Garmin Model) was used to measure the geographical positions of the measured locations.

The effective power density was computed from the sum of the measured vertical and horizontal radiofrequency field densities. The specific absorption rate (SAR) is computed using the formula

$$SAR = \rho_{pd} \times a_{hsa} / w_{hw} \quad 1$$

Where ρ_{pd} = power density, a_{hsa} = human surface area (20,128.99 cm²), and w_{hw} = Average human weight (60kg), (Enyinna and Avwiri, 2010) .

3. Results and Discussion

The results of the average RFR measurements and calculated values of SAR for the telecommunication base stations (masts) are presented in Tables 1–4. The total power density was plotted against distances which are shown in Figures 2- 5.

Table 1: Average Total Power Density (TPD) and Specific Absorption Rate (SAR)
For the North, South, east and west direction for Rumuokoro

Distance(m)	Average TPD ($\mu\text{W}/\text{cm}^2$)	Average SAR ($\mu\text{W}/\text{kg}$)
5	2.978	999.231
10	4.295	1441.085
20	2.849	955.840
30	2.359	791.333
40	1.501	503.474
50	0.591	198.415
60	0.610	204.767
70	0.838	281.261
80	0.797	267.282
90	0.751	251.961
100	1.120	375.760
150	1.165	390.969
200	1.410	473.167
300	0.670	224.897
400	0.541	181.394

Table 2: Average Total Power Density (TPD) and Specific Absorption Rate (SAR)
for the North. South, east and west direction for Mile 3

Distance(m)	Average TPD($\mu\text{W}/\text{cm}^2$)	Average SAR($\mu\text{W}/\text{kg}$)
5	3.372	1131.306
10	3.290	1103.711
20	1.592	534.116
30	1.566	525.225
40	1.584	531.264

50	1.894	635.269
60	1.554	521.283
70	1.113	373.244
80	1.827	612.791
90	1.640	550.136
100	2.342	785.573
150	1.633	547.788
200	2.084	699.266
300	0.893	299.518

Table 3: Average Total Power Density (TPD) and Specific Absorption Rate (SAR) for the North. South, east and west direction for Mile 1

Distance(m)	Average TPD($\mu\text{W}/\text{cm}^2$)	Average SAR($\mu\text{W}/\text{kg}$)
5	4.427	1485.175
10	5.728	1921.577
20	2.573	863.074
30	3.985	1336.968
40	3.649	1224.240
50	2.779	932.438
60	3.688	1237.241
70	2.419	811.575
80	1.634	548.039
90	1.167	391.529
100	0.719	241.057
150	0.517	173.286
200	0.550	184.525
300	0.322	108.031

Table 4: Average Total Power Density (TPD) and Specific Absorption Rate (SAR) for the North. South, east and west direction for Garrison

Distance(m)	Average TPD($\mu\text{W}/\text{cm}^2$)	Average SAR($\mu\text{W}/\text{kg}$)
5	2.255	756.441
10	2.928	982.232
20	4.145	1390.536
30	2.986	1001.691
40	2.396	803.746
50	2.349	787.978

60	1.917	643.042
70	1.391	466.681
80	0.896	300.720
90	0.498	167.191
100	0.423	142.028
150	0.339	113.846
200	0.206	69.113

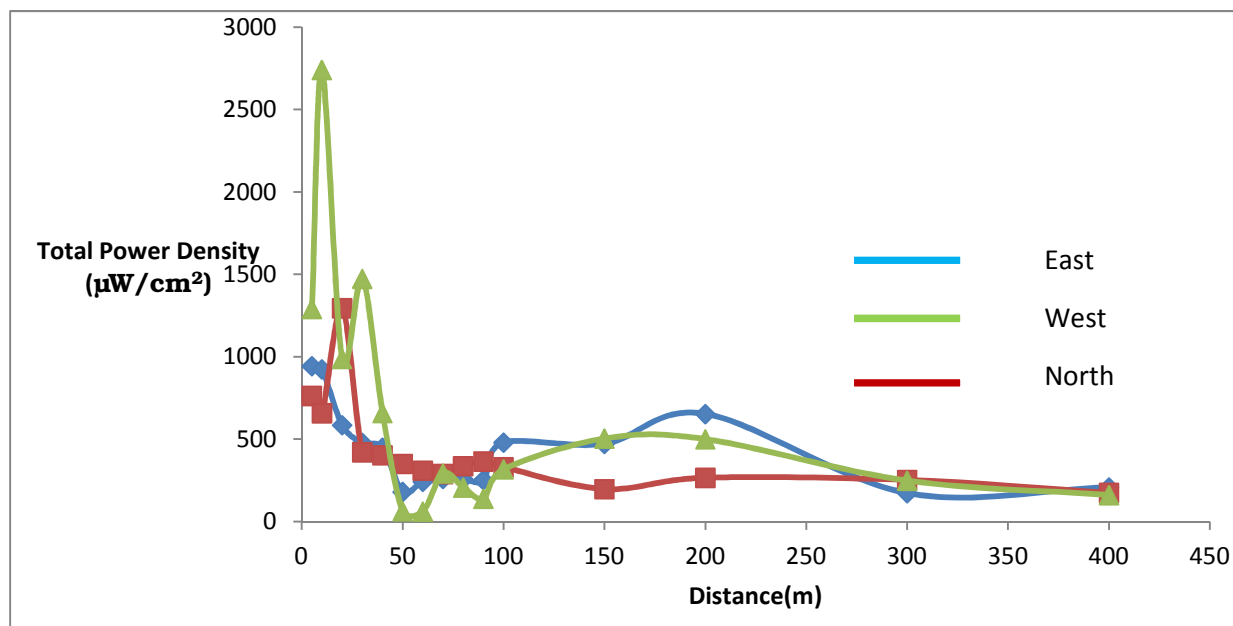


Fig 1: Graph of Total Power Density against Distance for the cluster at Rumuokoro for the north, south, east and west directions

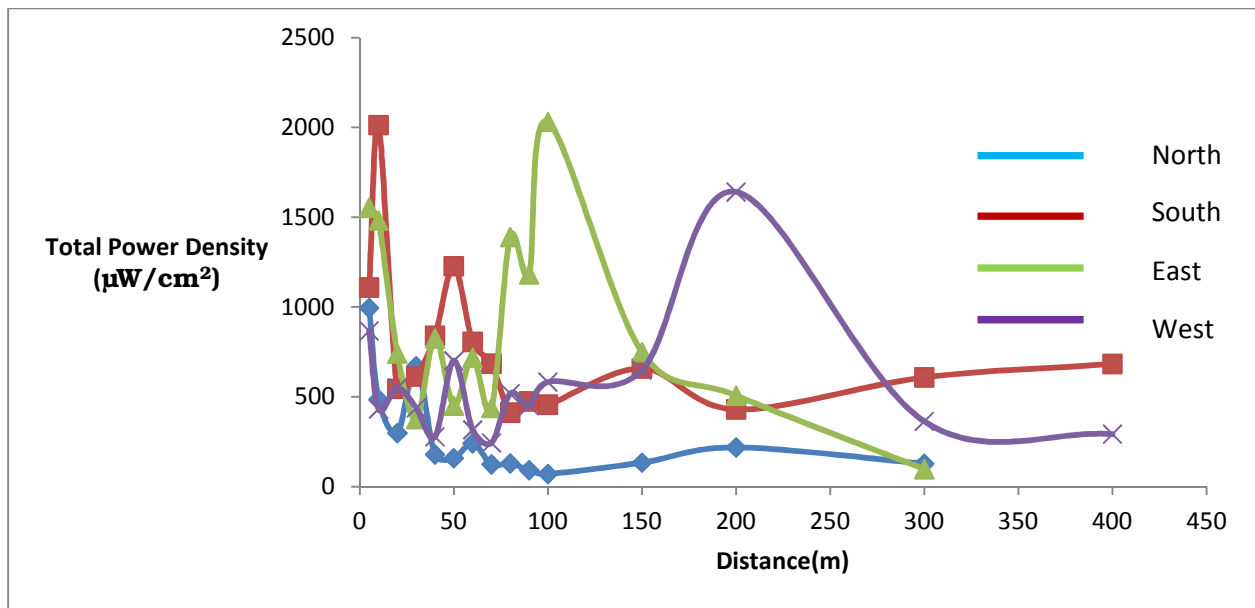


Fig 2: Graph of Total Power Density against Distance for the cluster at Mile 3 for the north, south, east and west directions.

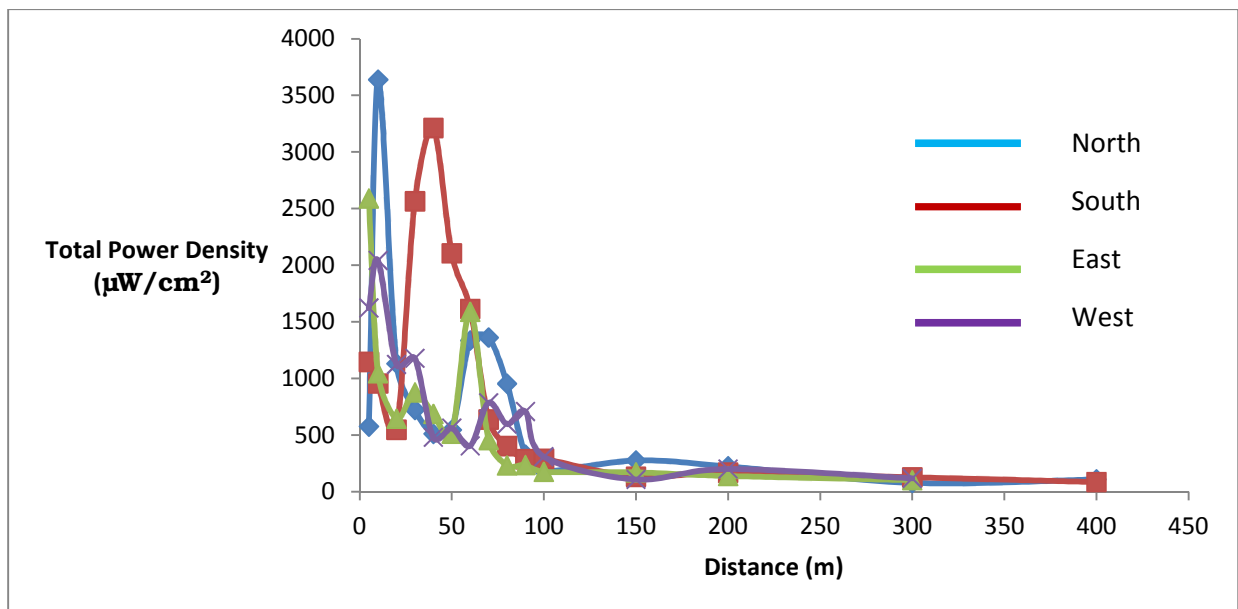


Fig 3: Graph of Total Power Density against Distance for the cluster at Mile 1 for the north, south, east and west directions.

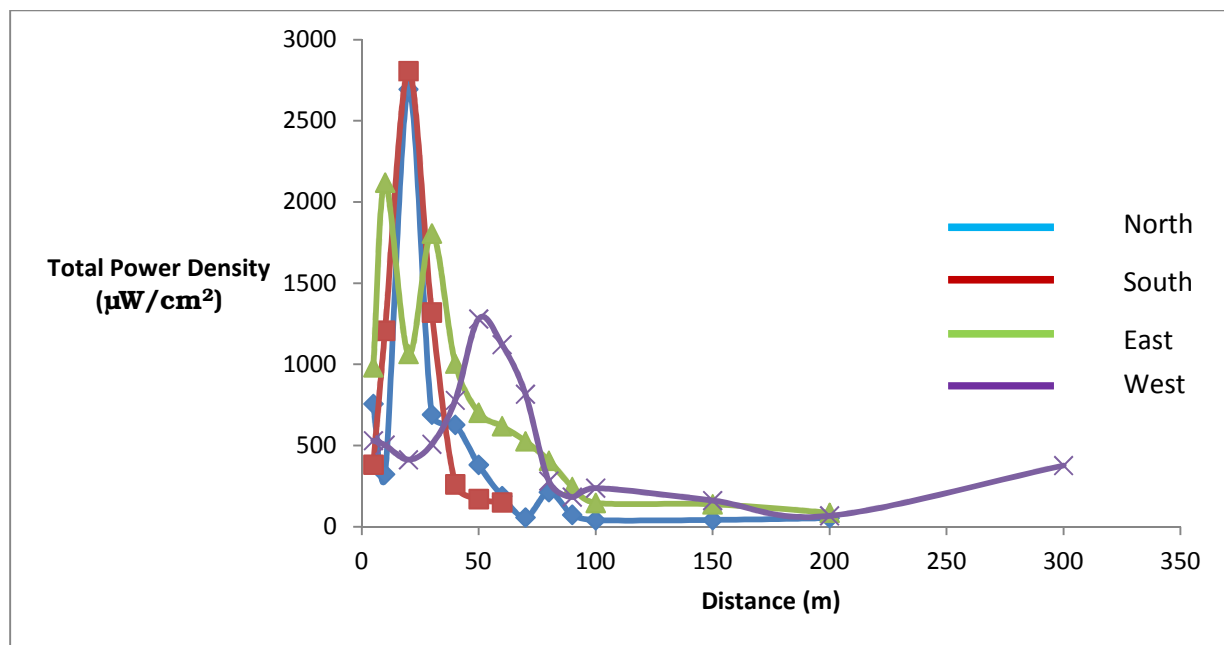


Fig 4: Graph of Total Power Density against Distance for the cluster at Garrison for the north, south, east and west directions.

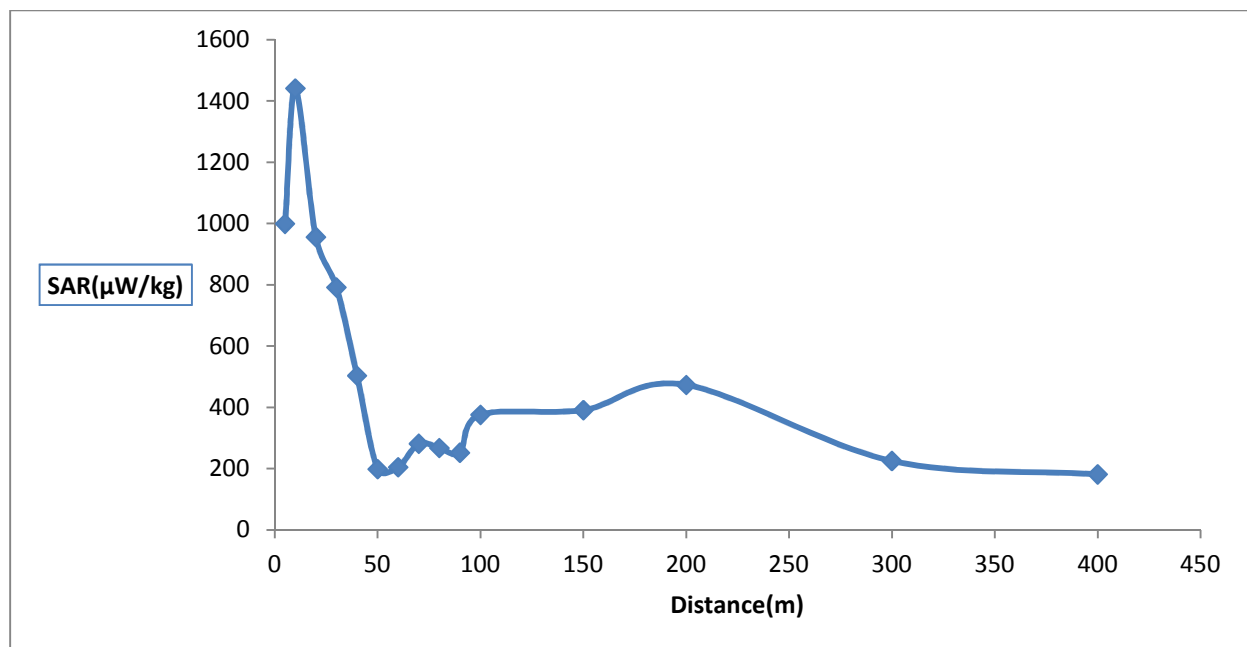


Fig 5: Graph of average SAR against distance for the cluster at Rumuokoro

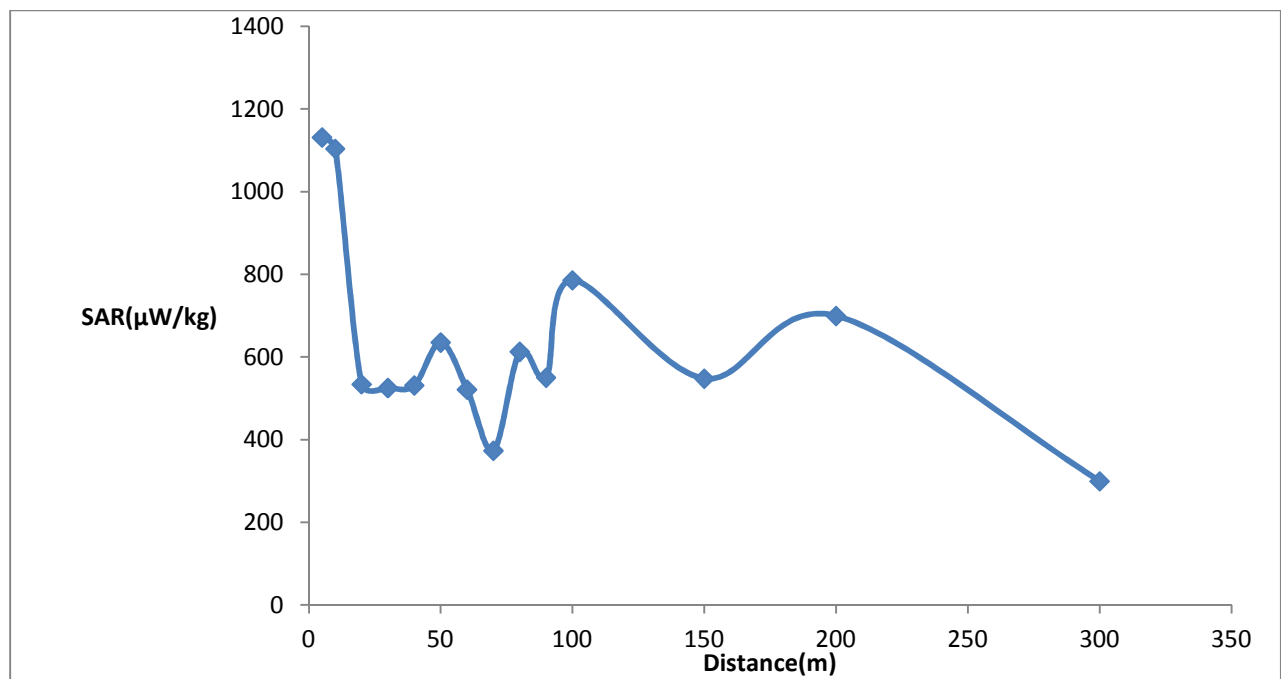


Fig 6: Graph of average SAR against distance for the cluster at Mile 3

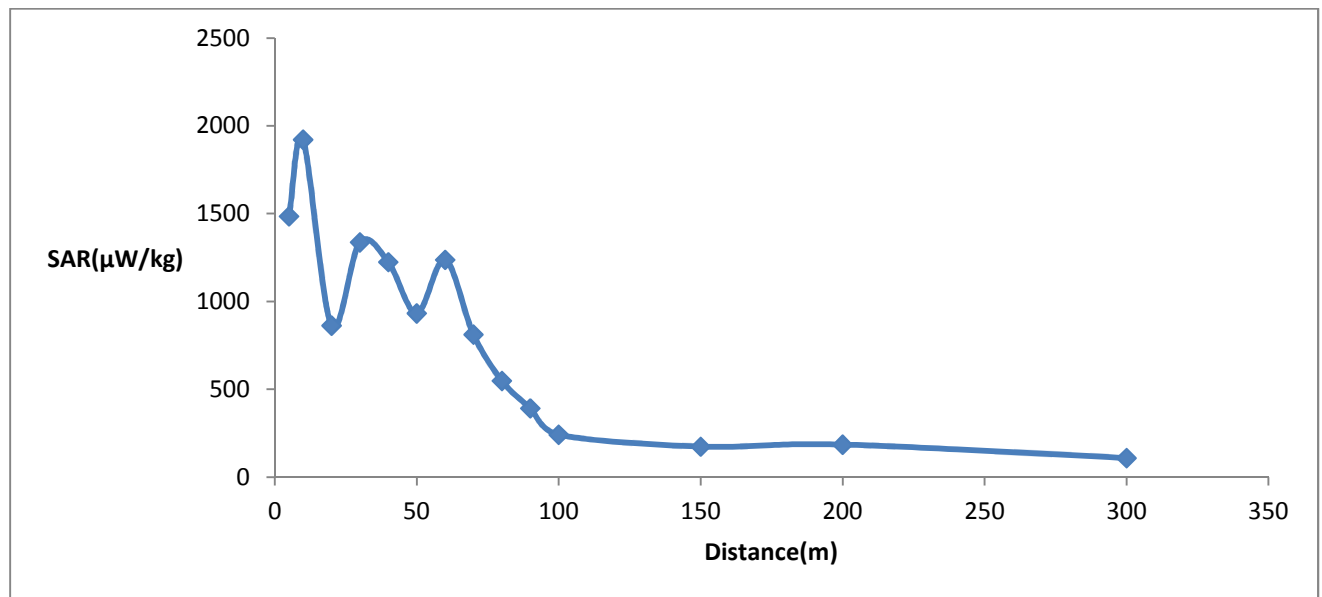


Fig 7: Graph of average SAR against distance for the cluster at Mile 1

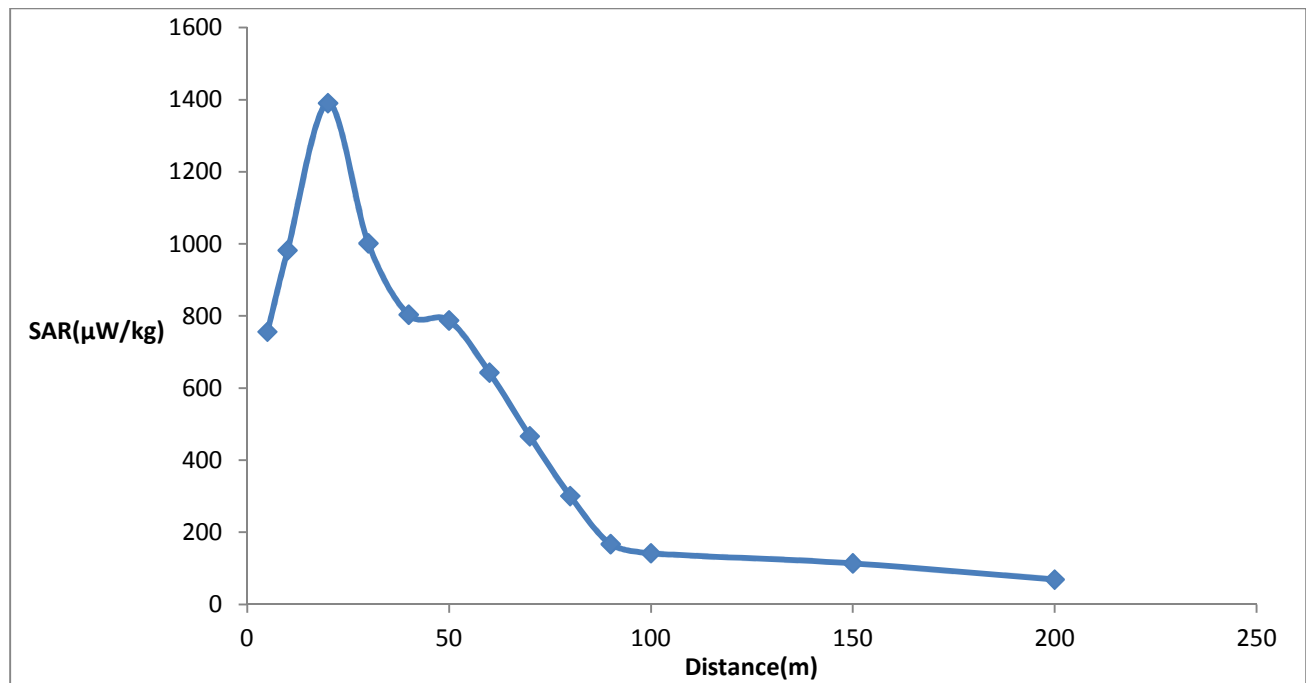


Fig 8: Graph of average SAR against distance for the cluster at Garrison

The power density measured ranged between $0.121 \mu\text{W}/\text{cm}^2$ and $10.847121 \mu\text{W}/\text{cm}^2$. The highest total power density and specific absorption rate were recorded in mile 1 as $10.847 \mu\text{W}/\text{cm}^2$ and $3,639.17 \mu\text{W}/\text{kg}$ respectively. This is probably because the telecommunication base stations in the area contains the highest number of masts. This is followed by $6.054 \mu\text{W}/\text{cm}^2$ and $2031 \mu\text{W}/\text{kg}$ in mile 3, $4.394 \mu\text{W}/\text{cm}^2$ and $1474.18 \mu\text{W}/\text{kg}$ in Rumuokoro and $8.265 \mu\text{W}/\text{cm}^2$ and $2806.450 \mu\text{W}/\text{kg}$ in Garrison. This shows that the amount of radiation emitted is directly proportional to the number of masts in the cluster. Compared to the results obtained by Enyinna and Avwiri (2010), the values are quite high probably because the masts are clustered. Also, when compared to the previous values obtained by Sabah 2008, the results are higher. This can be attributed to the fact that there may be other sources of RF radiation apart from the masts which were not taken into consideration. These other sources include power lines, banks and other companies that provide their own network, companies that make use of RF emitting equipments. The graph of measured total power density (TPD) against distance shows that RF radiation from mast decreases with distance, though with some degree of irregularity. This is due to interference from other sources of radiation around the masts such as transformers, uv radiations, domestic/ industrial /medical equipments and WiFi. Theoretically, power density is supposed to decrease linearly with distance, but this is not, as practically shown in the figures above. This can be due to the interference from these other sources of RF radiation. The results showed that the RF radiations emitted by telecommunication masts clusters in Port Harcourt are below the Federal Communication Commission's recommended permissible limits of $570 \mu\text{W}/\text{cm}^2$ and $1000 \mu\text{W}/\text{cm}^2$ (power density) or $1.9 \times 10^5 \mu\text{W}/\text{kg}$ and $3.4 \times 10^5 \mu\text{W}/\text{kg}$ (SAR) for GSM 900 and GSM 1800 respectively and also the ICNRP standards which are $4.5 \text{W}/\text{m}^2$ for

GSM 900 and 9.0W/m^2 for GSM 1800 or 0.08W/kg (SAR). The ICNRP standards are also adopted by the Nigeria Communications Commission (NCC) and National Environmental Standards and Regulations Enforcement Agency (NESRAE). This means that these masts clusters in Port Harcourt are far below the NCC and NESRAE recommended standards. The results showed that there is an insignificant and negative correlation between exposure of RF radiation, human health and long period of time. This is in line with the results obtained by Shalangwa, 2010 using the same method of analysis. This means that there is no effect on human health because the low power emission has no sufficient ionization energy to destroy any part of cell in human body.

4. Conclusion

Conclusively, the results of radiation density and SAR obtained support the fact that telecommunication masts have no negative effect on the environment since they were far below the limits of exposure. Even though people are concerned with the implication of having telecommunication base stations (masts) within residential and business premises, there has not been a conclusive research supporting adverse effects on human health. This means that the mast clusters do not pose any health hazard to the general public.

References

- Ayinmode Bolaji O. and Farai Idowu P. (2012) Risks Associated with Low Level Radiofrequency Exposure at Close Proximities to Mobile Phone Base Stations. *The Pacific Journal of Science and Technology* Volume 13. Number 2. 330– 335 <http://www.akamaiuniversity.us/PJST.htm>
- Enyinna P. I and Avwiri G.O. (2010) Characterization Of The Radiofrequency Radiation Potential Of Alakahia And Choba Communities, Nigeria. *Working and Living Environmental Protection Vol. 7, No 1, 2010, 25 - 31*
- Google Maps, 2015. www.google.com
- Hutter, H.P., H. Moshammer, P. Waller, and M. Kundi. (2006). “Subjective, Sleeping Problems, and Cognitive Performance in Subjects Living Near Mobile Phone Base Station”. *Occup. Environ. Med.* 63:307-313.
- Hart L, Jackson K. P, Akpee D And E.C. Moka (2012). Land Use Planning And Telecommunication Facilities Locations In Port Harcourt, Rivers State . *Research Journal in Engineering and Applied Sciences* 1(3), 184-189
- NCC, (2014). Nigerian Telecommunication Communication <http://www.ncc.gov.ng>, 2014, date accessed 19/9/2015
- NPC, "2006 Population and Housing census of the Federal Republic of Nigeria 2006: Priority Tables, Volume II," 2006.

International Commission on Non-Ionizing Radiation Protection (1998). Guidelines For Limiting Exposure To Time-Varying Electric, Magnetic, And Electromagnetic Fields (up to 300 GHz) *Health Physics*, 74(4):494-522

EM Watch: 2011, Electromagnetic Radiation Health Effects EM Watch Network. Retrieved 12 May 2016. www.emwatch.com/EMF

W.H.O. 2006, Electromagnetic Fields and Public Health. Media Centre fact sheet 304. Retrieved 4 June 2016. www.who.int/mediacentre/factsheets/fs304/en

Santini, R.; Seigne, M.; Bonhomme-Faibre, L. (2000) Danger des téléphones cellulaires et de leurs stations relais. *Pathol. Biol.*, 48, 525–528.

Sabah . H (2008). Theoretical Estimation of Power Density Levels around Mobile Telephone Base Stations. *Journal of Science & Technology Vol. (13) No.(2), pg 101-112*

Shalangwa D. A. (2010) “Measurement of exposure of radio frequency field (RF) radiation from global system for mobile communication (GSM) masts” *Journal of Electrical and Electronics Engineering Research Vol. 2(3), pp. 75-84, May 2010*

Santini, R., P. Santini, J.M. Danze, P. Le Ruz, and M. Seige. (2003). “Symptoms Experienced by People Living in Vicinity of Cell Phone Base Station: Incidence of Distance and Sex”. *Pathol. Biol.* 50:369-373.