

Original Research Article

Modeling and Simulation of Hybrid Maximum Power Point Tracking for Solar Power System

Ali Jasim^{1,2} and Yuri Shepetov^{2*}

¹Space and Communication Technology Center, Ministry of Science and Technology, Baghdad, Iraq.

²Department of Space Technology and Non-Conventional Energy Sources, National Aerospace University "Kharkiv Aviation Institute", Kharkov, Ukraine.

Authors' contributions:

This work was carried out in collaboration between all authors. Author Shepetov designed the study and structure of article, performed the finish editimn. Author Jasim performed the analysis, the first draft of the manuscript, managed the literature searches. All authors read and approved the final manuscript.

ABSTRACT

This paper presents, a Hybrid Maximum Power Point Tracking (HMPPT) controller for solar power system is modeled using MATLAB Simulink. The model consists of PV module, boost converter, and HMPPT controller and load. The proposed hybrid method is a maximum power coefficient (K_p) and modified hill climbing MPPT method. The boost converter model is allowed the input voltage of the converter, i.e. output voltage of PV is changed by varying the duty cycle, so that the hybrid maximum power point could be tracked when the environmental changes. The increasing efficiency of the solar power system is important engineering task. From the experiment, the developed model comforms with the circuit model provided by MATLAB Simulink Power Simulation. The power system was simulated in single (autonomous) power system worked on own load with $R=25, 50, 100$ Ohm dependence P_{out} from duty cycle D . Existing methods of maximum power point tracking of such systems not always can to search surely for maximum power point if there are existing some local maximums of power. It can be if illumination of few non-oriented solar panels are different. Furher, the simulation results show that the developed model performs well in tracking the hybrid maximum power point of the PV module using modified hill climbing (HC) Algorithm and maximum power coefficient (K_p).

Keywords: hybrid MPPT methods, Photovoltaic, boost converter, model Simulink.

1. INTRODUCTION

Green technology is one of the most renewable and clean energy sources. It attracts the human 's attention because of its clean power, cost reduction, continuity and reliability. It aims at finding ways of producing energy that does not deplete natural sources of energy [1-2]. It refers to the alternative technology which reduces fuel use and expects less damage to living things and environment. One of the most important renewable energy sources is solar radiation. The solar PV panels have a non-linear characteristic curve which means output power of PV arrays is always changing with environmental conditions the point of maximum power (P_{mpp}) shifts its position. Therefore, a fixed operating point cannot be enforced on a PV system. [3-4].

An important consideration in achieving high efficiency in the PV power generation system is to match the PV source and load impedance properly for any weather conditions, thus obtaining maximum power generation [2-5].

Some hybrid methods are used so as to match the source and load properly, thereby increasing the efficiency of solar cell [6]. The hybrid methods, which are those that combination of indirect and direct

methods, estimates a value by indirect method, tracks using perturbations towards MPP using direct methods and faster convergence rate [7-13].

Maximum power coefficient is a new method, which is the product of multiplication the open circuit voltage coefficient K_V (the ratio of actual voltage to open circuit voltage V_{OC}) and the short circuit current coefficient of K_I (the ratio of the actual current to short circuit current I_{SC}) [14-17].

The most MPPT method of the available PV systems operate on hill climbing method owing to its high precision, simple structure, direct investigation of power, high reliability, and independence from sensors such as radiation and temperature sensors [17-24]. This method has three major disadvantages: Firstly tracking local peaks of the solar array voltage-power curve, secondly oscillations around the MPP and thirdly low speed. A DC to DC boost converter is needed for implementing HMPPT. The DC-DC converter deliver the maximum power from PV module to load by adjusting the duty cycle and able to distribute a maximum power when load is changes [25]. The proposed hybrid method is a maximum power coefficient (K_P) and modified hill climbing MPPT method. The paper is organized as follows. Section 2 general configuration of solar power system. The briefly explains the modeling of solar PV array in section 3. The proposed algorithm is presented in section 4. Section 5 the briefly explains the DC-DC boost converter the testing procedure adopted for the proposed algorithm. Section 6 discusses the simulation results. The section 7 the conclusion of the paper.

2. GENERAL CONFIGURATION OF SOLAR POWER SYSTEM

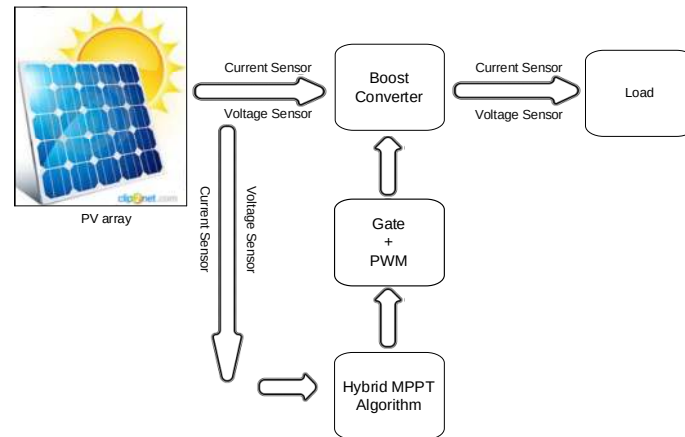


Fig 1. General block diagram of configuration of Solar Power System

3. MODEL OF SOLAR PV ARRAY

Analyzing the physical model, a photovoltaic cell can be modeled as a current source connected in parallel with a single diode for its simplicity. Current source produces a constant current, this current is proportional to the intensity of the light falling upon the cell. A general mathematical description of current-voltage output characteristics of a PV cell has been studied for over the last few decades to improve the efficiency of solar PV module [23-28]. The output obtained from the module is variable DC voltage, this voltage depends upon the solar radiation intensity and temperature. The leakage of the semiconductor junction is represented as the parallel resistance R_p of PV cell and the connection between cells are modeled as a small series resistance R_s [2,7,9-11,13,15,26-42]. The simplest equivalent circuit of the general model, is shown in Fig. 2. [2,7,9,11,13,15,26-47].

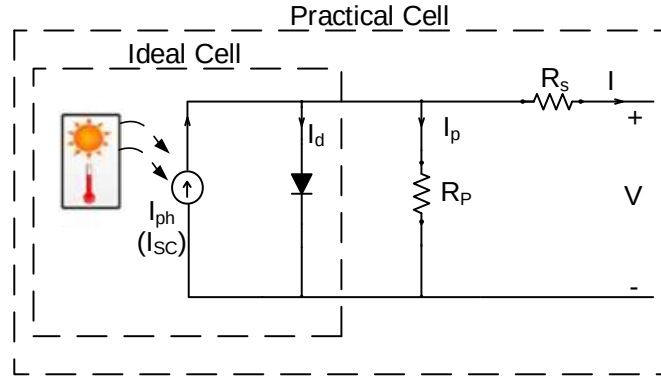


Fig. 2. Equivalent Circuit of Photovoltaic Cell.

From the circuit in figure1 the output panel current can be expressed as equation 1[2,7,9-11,13,15,26-36,44].

$$I = I_{ph} - I_d - I_p \quad (1)$$

Where

I : PV module terminal current (A), I_{ph} : Photovoltaic current or light-generated current (A), I_d : Shockley diode equation, I_p : Current of parallel resistance (A).
According to the model of a solar cell, the relationship between the cell's current and voltage, and by applying Kirchhoff's law, we can determine the voltage-ampere dependency of the photovoltaic cell, can be expressed as equation 2 [2,7,9-11,13,15,25-47].

$$I = I_{ph} - I_s \cdot \left[\exp \left(\frac{q(V + I \cdot R_s)}{AK_B T_C} \right) - 1 \right] - \frac{(V + I \cdot R_s)}{R_p} \quad (2)$$

Where

I_s : The diode saturation current or cell saturation of dark current (A), q : The electron charge (1.602×10^{-19}) (C), K_B : The Boltzmann constant (1.38×10^{-23}) (J/K), T_C : The cell working temperature (K), A : The diode factor (1...1.6), V : The PV module terminal voltage (V).

When R_s is assumed to be zero. That is, no series loss. The photocurrent mainly depends on the solar isolation and cell's working temperature, which is described as equation 3 [2-7,10,13,15,25-28,33-35,39,42,44].

$$I_{ph} = [I_{sc} + K_1 \cdot (T_C - T_{ref})] \cdot \frac{G}{G_{ref}} \quad (3)$$

When I_{sc} is the short-circuit current at a (25 °C and 1000W/m²); K_1 is the cell's short-circuit temperature coefficient, T_{ref} , the reference temperature [in Kelvin], respectively, G and G_{ref} , the radiation and radiation at standard test condition (1000W/m²), respectively. On the other hand, the diode saturation current (I_s) dependence with the temperature can be described as equations 4 and 5, respectively [2-7,10,13,15,25-28,33-35,39,42,44,46].

$$I_s = I_{rs} \cdot \left(\frac{T_C}{T_{ref}} \right)^3 \cdot \exp \left[\frac{q E_g}{AK_B} \left(\frac{1}{T_{ref}} - \frac{1}{T_C} \right) \right] \quad (4)$$

$$I_{rs} = \frac{I_{sc}}{\exp \left[\frac{q V_{oc}}{AK_B T_C N_s} \right] - 1} \quad (5)$$

Where I_{rs} is the reverse saturation current at reference temperature and solar radiation; E_g is the band-gap energy of the semiconductor material and A is the ideality factor, depends on cell's manufacturing technology.

The solar photovoltaic array is formed by a series-parallel combination of appropriate solar cell to provide electric power demand of the consumers. N_p represents the cells interconnected in parallel and N_s shows the cells interconnected in series as shown in Fig.3, the relationship between the output current and voltage is expressed as equation 14 [2-7,10,13,15,26-27,29-42,47].

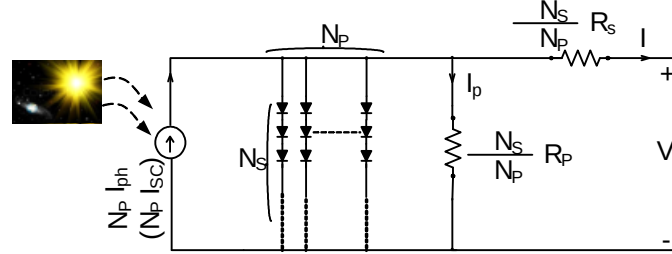


Fig 3. Equivalent circuit model of solar PV array

$$I = N_p I_{ph} - N_p I_s \cdot \left\{ \exp \left[\frac{q}{A K_B T_C} \left(\frac{V}{N_s} + \frac{I \cdot R_s}{N_p} \right) \right] - 1 \right\} - \left(\frac{\frac{N_p V}{N_s} + I \cdot R_s}{R_p} \right) \quad (6)$$

Solar array has been simulated in MATLAB to investigate the characteristic curves subject to working temperature and atmospheric irradiation condition. Four solar module are connected in series to form panels and, as it appears in figure 4. Each module exposed to light source.

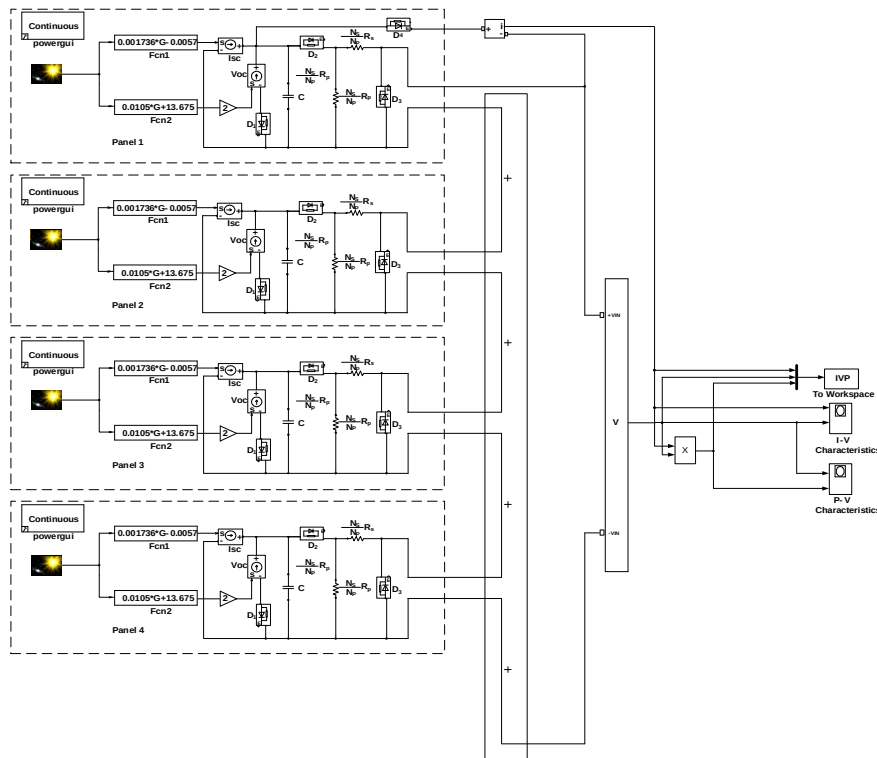


Fig 4. Simulation diagram for of PV array built in SimPowerSystems.

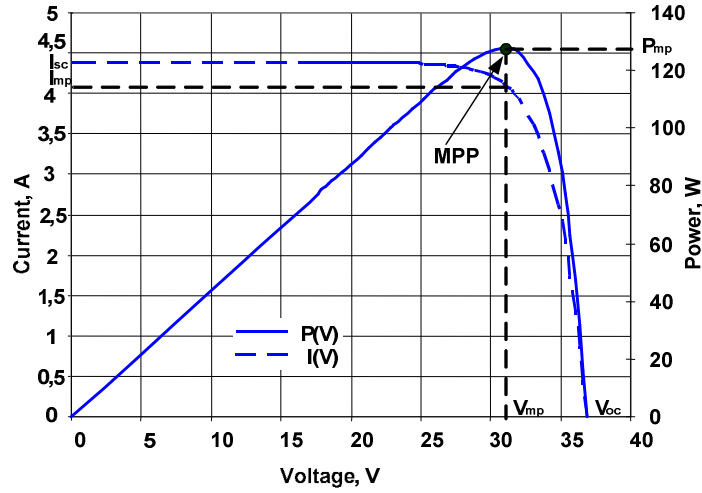


Fig 5. Characteristics curve of a typical PV cell.

4. PROPOSED ALGORITHM

The proposed algorithm is shown in Fig. 6. It is a two stage MPPT method that has the maximum power coefficient (K_P) method as the first stage and modified hill climbing as the second stage. The hybrid methods consist of indirect method and direct method. Indirect method is new method maximum power coefficient (K_P) and direct method modified hill climbing.

The maximum power coefficient (K_P) method which is the product of multiplication the open circuit voltage coefficient K_V (the ratio of actual voltage to open circuit voltage V_{OC}) and the short circuit current coefficient of K_I (the ratio of the actual current to short circuit current I_{SC}) [3,7,14-17].

Hill climbing (HC) technique is widely applied in MPPT controllers because of their simplicity and simple usage. In this method, the duty cycle of the power converter can change and the power is absorbed from the array compared to the previous stage. If power increases, the duty cycle changes to the previous direction and if power decreases, the duty cycle changes to the opposite direction [17-24,31-33].

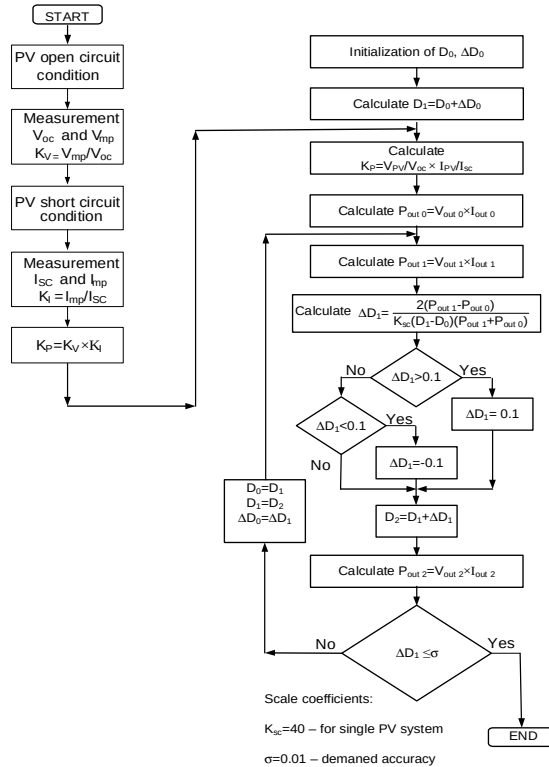


Fig. 6. Flowchart of Hybrid MPPT algorithm.

5. DC-DC BOOST CONVERTER

Boost converter is one of DC-DC converter type which is used to convert step up the input voltage of the converter. Figure 4 shows the topology of boost converter which consists of power switch S, diode D, inductor L, and input/output capacitors C1,C2. Insulated Gate Bipolar Transistor (IGBT), is selected as power switch S, due to high frequency and high voltage application. The boost converter is responsible for tracking maximum power available at the PV array and deliver the maximum power from PV module to load by adjusting the duty cycle and able to distribute a maximum power when load is changes. The proposed algorithm is tested using simulink as shown in Fig.7. A boost converter is designed to interface the PV panel with the load [25-29,31-32,41-42,45,47].

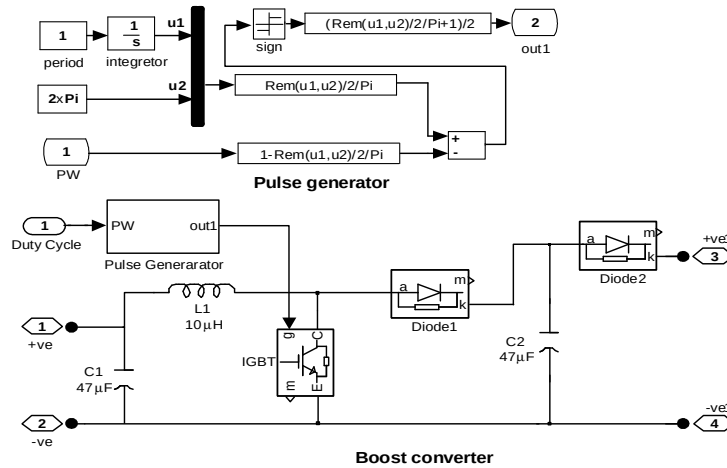


Fig. 7. Simulink-model of Boost DC-DC converter.

6. SIMULATION RESULTS

The power system was simulated in single (autonomous) power system worked with different loads $R=25, 50, 100$ Ohm. Dependence P_{out} from duty cycle D for single load. The calculation is performed for four series panels, which are presented in figure 4.

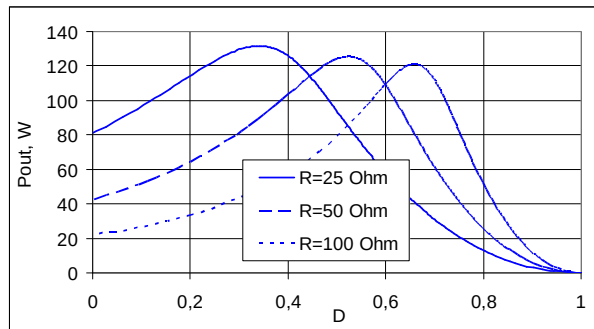


Fig. 8. Dependence P_{out} from duty cycle D for single system.

This function can be used for calculation of ΔD_i but needed in scaling and cropping. Scaling is performed on the value of P_{out} and scale coefficient K_{sc} .

$$\Delta D_i = \frac{P_i - P_{i-1}}{D_i - D_{i-1}} \times \frac{2}{P_i + P_{i-1}} \times \frac{1}{K_{sc}} \quad (7)$$

Where P_i , P_{i-1} - present and previous measured values output power; D_i , D_{i-1} – the present and previous values of duty cycle pulses. To ensure the stability of the algorithm the incremental value is confined to the interval $[-0.1, 0.1]$.

$$\Delta D_i = \begin{cases} -0.1 & \text{if } \Delta D_i \leq -0.1 \\ \Delta D_i & \text{if } -0.1 < \Delta D_i < 0.1 \\ 0.1 & \text{if } \Delta D_{i+1} \geq 0.1 \end{cases} \quad (8)$$

The function dP_{out}/dD with different loads $R=25, 50, 100$ Ohm is shown on Fig. 9. and Modified function for calculation of ΔD_i is shown on Fig. 10.

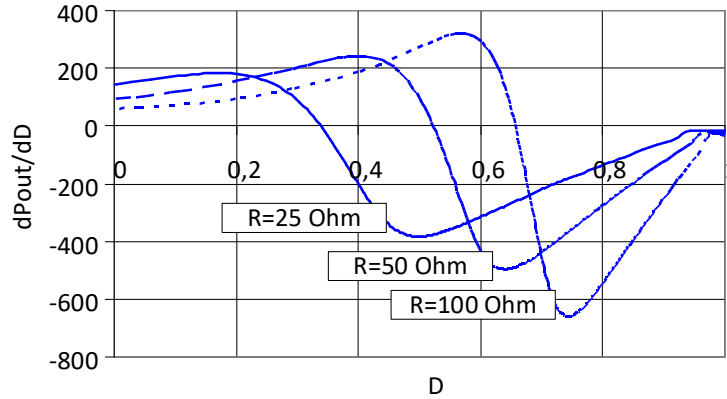


Fig. 9. Dependence dP_{out}/dD from duty cycle D for single system.

Recommended value of the scaling coefficient: $K_{sc} = 40$ – for systems running on a single load. These values are determined by the width of the ΔD_i function transition area from -0.1 to 0.1 which must be more wide than 0.1 and still very well.

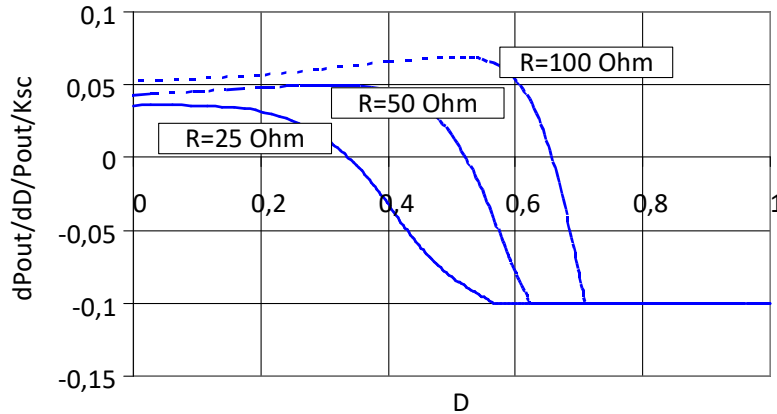


Fig. 10. Modified function for calculation of ΔD_i for single system.

7. CONCLUSION

This paper presents the modeling of maximum power point tracking (MPPT) hybrid method based on modified hill climbing (HC) method and controlling of power coefficient. The aspect of the method is choosing initial point through power coefficient which is the product of multiplication the open circuit voltage coefficient K_V (the ratio of actual voltage to open circuit voltage V_{OC}) and the short circuit current coefficient K_I (the ratio of the actual current to short circuit current I_{SC}). And next tracking by using of special function through digital differentiation of measured values of output power with

scaling on actual power and special empirical coefficient. The simulation results revealed robust tracking of the global maximum power at a sufficiently rapid convergence.

REFERENCES

1. Demirbas A. Waste Energy for Life Cycle Assessment, Green Energy and Technology, DOI 10.1007/978-3-319-40551-3_2
2. Jasim AM; Shepetov YA. Power Electronic for Single-Phase Grid-Connected PV System. East European Scientific Journal. 2016;6;84-90.
3. Jasim AM; Shepetov YA. Methods of photovoltaic power control mode. Aerospace Engineering and Technology (Ukr.) 2015;2;51–57.
4. Ben Mahmoud Z; Hamouda M; Khedher A. A comparative study of four widely-adopted MPPT techniques for PV power systems. Control Engineering & Information Technology (CEIT). 2016; DOI: 10.1109/CEIT.2016.7929090.
5. Anand Kumar S; Ratnakar KL; Yogananda BS; Kamath BR. Simulation of Photovoltaic Cell and MPPT Controllers and their Analysis. International Journal of Engineering Science and Innovative Technology (IJESIT). 2015;4(3);253-263.
6. Sher HA; Murtaza AF; Al-Haddad K. A Hybrid Maximum Power Point Tracking Method for Photovoltaic Applications with Reduced Offline Measurements. Industrial Technology (ICIT). 2017; DOI: 10.1109/ICIT.2017.7915585
7. Adedayo M; Farayola; Hasan AN; Ali A. Comparison of Modified Incremental Conductance and Fuzzy Logic MPPT Algorithm Using Modified CUK Converter. Renewable Energy Congress (IREC). 2017; DOI: 10.1109/IREC.2017.7926029.
8. Subudhi B; Pradhan R. A Comparative Study on Maximum Power Point Tracking Techniques for Photovoltaic Power Systems. IEEE Transactions on sustainable energy. 2013;1(4):89-98.
9. Javier C; Pindado S; Sanz-Andrés Á. Accurate Simulation of MPPT Methods Performance When Applied to Commercial Photovoltaic Panels. Journal of Scientific World. 2015; ID 914212.
10. Masood B; Siddique MS; Asif RM; ul-Haq MZ. Maximum power point tracking using hybrid perturb & observe and incremental conductance techniques. Engineering Technology and Technopreneurship (ICE2T). 2014; DOI: 10.1109/ICE2T.2014.7006277.
11. Sher HA; Murtaza AF; Al-Haddad K. A hybrid maximum power point tracking method for photovoltaic applications with reduced offline Measurements. 2017 IEEE International Conference on Industrial Technology (ICIT). 2017; DOI: 10.1109/ICIT.2017.7915585.
12. Nagaraju K; Bhavithira V. A Comparative Study of Solar MPPT Control Techniques, Middle-East Journal of Scientific Research. 2016;24(4):1122-1127.
13. Labeeb K ; Shankar S ; Ramprabhakar J. Hybrid MPPT Controller for Accurate and Quick Tracking. Recent Trends in Electronics, Information & Communication Technology (RTEICT). 2016; DOI: 10.1109/RTEICT.2016.7808089
14. Ngan MS; Tan CW. A study of maximum power point tracking algorithms for stand-alone Photovoltaic System. Applied Power Electronics Colloquium (IAPEC). 2011; DOI: 10.1109/IAPEC.2011.5779863.
15. Reisi AR; Moradi MH; Jamasb S. Classification and comparison of maximum power point tracking techniques for photovoltaic system: A review. Renewable and Sustainable Energy Reviews. 2013;19:433-443.
16. Vicente EM ; Moreno RL. Ribeiro ER. MPPT Technique Based on Current and Temperature Measurements. International Journal of Photoenergy. 2015; ID 242745
17. Jasim AM; Shepetov YA. Novel Classification for Tracking Techniques Maximum Power Point in Solar Photovoltaic Systems. Current Journal of Applied Science and Technology (CJAST). 2017; 21(6):1 – 13. DOI: 10.9734/CJAST/2017/34406
18. Xiao W; Elnosh A; Khadkikar V; Zeineldin H. Overview of Maximum Power Point Tracking Technologies for Photovoltaic Power Systems. 2011;DOI: 10.1109/IECON.2011.6119946.
19. Antonio LG; Marquez MBS; Rodriguez OP. Maximum power point tracking techniques in photovoltaic systems: A brief review. Power Electronics (CIEP). 2016; DOI: 10.1109/CIEP.2016.7530777.
20. Banaei MR; Shirinabady MR. MPPT control of photovoltaic using SEPIC converter to reduce the input current ripples. Journal of Engineering Research and Applications. 2014;(1):1257–1268.
21. Bahari MI; Tarassodi P; Naeini YM; Khalilabad AK; Shirazi P. Modeling and simulation of hill climbing MPPT algorithm for photovoltaic application. Power Electronics, Electrical Drives, Automation and Motion (SPEEDAM). 2016; DOI:10.1109/SPEEDAM.2016.7525990.

22. Belkaid A; Gaubert Jean-Paul; Gherbi A. Design and implementation of a high performance technique for tracking PV peak power. IET Renewable Power Generation. 2017; 11(1):1-11. DOI: 10.1049/iet-rpg.2016.0023.
23. Jeddi N ; Ouni El Amraoui L. Comparative study of MPPT techniques for PV control systems. Electrical Sciences and Technologies in Maghreb (CISTEM), 2014 International Conference. 2014;4(12):1–7.
24. Jasim AM; Shepetov YA. Modified Hill Climbing Maximum Power Point Tracking (MPPT) Control Method For Satellite Electrical Power Supply System. Aviation and space technology. 2017;2;78-83.
25. Ratnalka P; Rifa'i M. Maximum Power Point Tracking Control For Photovoltaic Using Neural Fuzzy. International journal of Computer and Electrical Engineering. 2012; 4(1). DOI: 10.7763/IJCEE.2012.V4.454
26. Tahiri FE; Chikh K; Khafallah M; Saad A. Comparative study between two Maximum Power Point Tracking techniques for photovoltaic system. Electrical and Information Technologies (ICEIT).2016; DOI:10.1109/EITech.2016.7519571.
27. Abderezak L; Aissa B; Hamza S. Comparative study of three MPPT algorithms for a photovoltaic system control. Information Technology and Computer Applications Congress (WCITCA), 2015. DOI: 10.1109/WCITCA.2015.7367039.
28. Jasim AM; Shepetov YA. Mathematical Model of PV Module with Pulse Width Modulation Control . Aviation and space technics and technology. 2015;3;60-66.
29. Bouselham L; Hajji B; Hajji H. Comparative study of different MPPT methods for photovoltaic system. Renewable and Sustainable Energy Conference (IRSEC). 2015;DOI: 10.1109/IRSEC.2015.7455085
30. Zakariae JA; Abdelhadi R; Abdelmounaim E; Omar B. Toward an approach to improve MPPT efficiency for PV system. Wireless Technologies, Embedded and Intelligent Systems (WITS). 2017;DOI: 10.1109/WITS.2017.7934644.
31. Dash SK; Verma D; Nema S; Nema RK. Comparative analysis of maximum power point (MPP) tracking techniques for solar PV application using MATLAB, Simulink. IEEE Conference Recent Advances and Innovations in Engineering (ICRAIE). 2014;DOI: 10.1109/ ICRAIE.2014.6909110.
32. Haque, A. Maximum Power Point Tracking (MPPT) Scheme for Solar Photovoltaic System. Energy Technology & Policy. 2014;DOI: 10.1080/23317000.2014.979379.
33. Mohammad Iman Bahari; Pouya Tarassodi; Yousef Mazaheri Naeini; Ali Kalantari Khalilabad; Paimaneh Shirazi. Modeling and simulation of hill climbing MPPT algorithm for photovoltaic application. 2016;DOI: 10.1109/SPEEDAM.2016.7525990.
34. Wang Bing; Wang Yuxian; Zhou Jianliang; Qian Yanping. A novel method for parameter identification of photovoltaic array. Control Conference (CCC). 2014;DOI: 10.1109/ChiCC.2014.6896140
35. Cemal Keles; B. Baykant Alagoz; Murat Akcin; Asim Kaygusuz; Abdulkarim Karabiber. A photovoltaic system model for Matlab/Simulink simulations. 4th International Conference on Power Engineering, Energy and Electrical Drives. 2013; DOI: 10.1109/PowerEng.2013.6635863.
36. Mohamed Ibrahim El-Sayed; Mohamed Abd-El-Hakeem Mohamed; Mohamed Hassan Osman. A Novel Parameter Estimation of a PV Model. 2016 IEEE 43rd Photovoltaic Specialists Conference (PVSC). 2016;DOI: 10.1109/PVSC.2016.7750220.
37. Ehsan Moshksar; Teymoor Ghanbari. Adaptive Estimation Approach of Parameter Identification of Photovoltaic Modules. IEEE Journal of Photovoltaics. 2017;7(2);614-623; DOI: 10.1109/JPHOTOV.2016.2633815
38. Pallavi Bharadwaj; Kunal Narayan Chaudhury; Vinod John. Sequential Optimization for PV Panel Parameter Estimation. IEEE Journal of Photovoltaics. 2016;6(5);1261-1268; DOI: 10.1109/JPHOTOV.2016.2574128.
39. Boscaino V; Cipriani G; Dio VDi; Miceli R; Capponi G. A simple and accurate model of photovoltaic modules for power system design. 2014;1-6; DOI: 10.1109/EVER.2014.6844088.
40. Ayedh H; ALQahtani. A simplified and accurate photovoltaic module parameters extraction approach using matlab. 2012 IEEE International Symposium on Industrial Electronics. 2012;1748-1753; DOI: 10.1109/ISIE.2012.6237355.
41. Abdelhakim Belkaid; Jean-Paul Gaubert. Design and implementation of a high performance technique for tracking PV peak power. IET Renewable Power Generation. 2017;11(1);92 – 99;DOI: 10.1049/iet-rpg.2016.0023.
42. Mendalek N; Al-Haddad K. Photovoltaic system modeling and simulation. International Conference on Industrial Technology (ICIT). 2017;DOI: 10.1109/ICIT.2017.7915592.

43. Murtaza A ; Sher H ; Chiaberge M ; Boero D ; De Giuseppe M ; Addoweesh K. A Novel Hybrid MPPT Technique for Solar PV Applications Using Perturb & Observe and Fractional Open Circuit Voltage Techniques. Institute of Electrical and Electronics Engineers (IEEE). International Conference on Mechatronics. 2012; <http://porto.polito.it/2519007/>.
44. El mentaly L; Abdellah A; Sahsah H. Comparison between HC, FOCV and TG MPPT algorithms for PV solar systems using buck converter. Wireless Technologies, Embedded and Intelligent Systems (WITS). 2017; DOI: 10.1109/WITS.2017.7934609.
45. Hari Priya T; Parimi Alivelu M; Rao UM. Development of hybrid controller for photovoltaic based DC-DC boost converter in DC grid connected applications. International Conference on Circuit, Power and Computing Technologies (ICCPCT). 2017;1–6; DOI:10.1109/ICCPCT.2016.7530221.
46. Labeeb K ; Shankar S ; Ramprabhakar J. Hybrid MPPT controller for accurate and quick tracking International Conference on Recent Trends in Electronics, Information & Communication Technology (RTEICT). 2016;1533 – 1537;DOI: 10.1109/RTEICT.2016.7808089.
47. Sharma P; Sathans. Performance Analysis of a Stand-alone Hybrid Renewable Energy Power System- a Simulation Study. India Conference (INDICON). 2015; 1–6; DOI: 10.1109/INDICON.2015.7443674.