

Spread Sheets for Laterals Spacing Design, With an Application on Mit Kenana Area in Egypt

Alaa Nabil El-Hazek*

¹Department of Civil Engineering, Faculty of Engineering, Benha University, Shoubra 11689,
Egypt

ABSTRACT

In this paper, Microsoft spread sheet software Excel is employed to get the laterals spacing design of steady state subsurface drainage systems. The most suitable and popular Hooghoudt equation is used to get the spacing L , including the equivalent depth. Given data are depth to the impermeable layer, radius of the pipe lateral, hydraulic conductivities of the soil above and below drain level, elevation of the water table midway between the drains, and drainage rate. Then, the lateral spacing L is assumed. Calculations are done through the spread sheet and the final result of L is obtained. Check for the obtained L is established with respect to the assumed value. Also, another check is employed for the equivalent depth d_e . Mit Kenana area, 40 km North of Cairo, represents the eastern fringes of the Nile Delta in Egypt. Existing design of Mit Kenana area is reviewed. Then spread sheets are employed to obtain laterals spacing, which is referred to as spread sheet design. Identical results are accomplished compared with the existing design. Laterals spacing design for steady state subsurface drainage systems employing spread sheets is efficient, accurate, quick, easy and simple.

Keywords: spread sheets, subsurface drainage, steady state, laterals, equivalent depth.

1. INTRODUCTION

Agricultural drainage is defined as the removal of excess gravitational water from agricultural lands for crop production purposes. Agricultural drainage is generally divided into two categories, surface drainage and subsurface drainage. Surface drainage removes water from the soil surface by promoting gravitational flow overland and through channels to be collected and conveyed to an outlet. Subsurface drainage removes excess soil water to gravity or a pumped outlet, [1].

Water available to plants is held in soil by capillarity, while excess water flows by gravity into drains. For subsurface drainage, laterals (field drains) are used to control the depth of the water table in the root zone by removing excess groundwater, [2].

For cropped irrigated and rainfed lands of the world, only about 14% is provided by some type of drainage. About 300 million ha, mainly in the arid and tropical humid zones of the

developing countries, needs artificial drainage. Till the year 2030, drainage should be improved in at least 10 -15 million ha, which might require investing at least € 750 million annually. It is expected that one third of this area will be provided with subsurface drainage systems, [3].

2. LATERALS SPACING DESIGN OF STEADY STATE SUBSURFACE DRAINAGE SYSTEMS

The movement of water into the drains is mainly affected by the hydraulic conductivity of the soil and drain spacing, depth, and size. Hooghoudt equation, as shown in figure 1, [4], is still the most suitable and popular equation for drainage design.

For steady state condition, the rate of recharge to the aquifer is assumed to be steady and equals the discharge of the drain. So, the water table position does not change as long as the recharge continues, [5].

$$Q L^2 = 8 K_b (D_i - D_d) (D_d - D_w) + 4 K_a (D_d - D_w)^2 \quad \dots\dots\dots (1)$$

Where:

- Q = steady state drainage discharge rate (m/day)
- L = spacing between the drains (m)
- K_b = hydraulic conductivity of the soil below drain level (m/day)
- d_e = equivalent depth, a function of L, $(D_i - D_d)$, and r
- D_i = depth of the impermeable layer (m)
- D_d = depth of the drains (m)
- D_w = steady state depth of the water table midway between the drains (m)
- K_a = hydraulic conductivity of the soil above drain level (m/day)
- r_0 = drain radius (m)

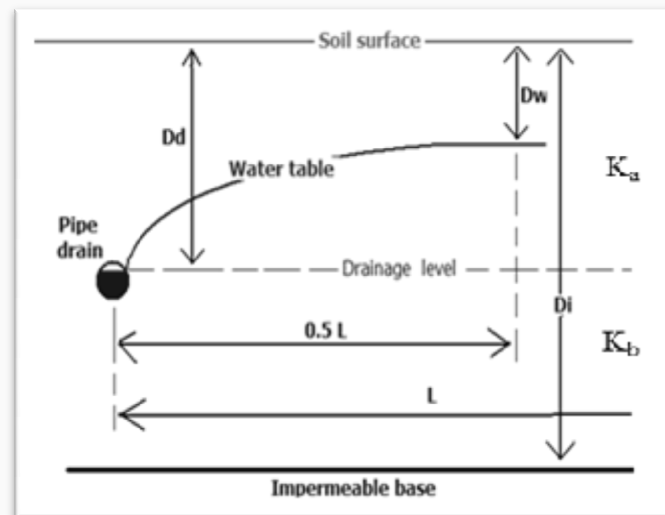


Fig. 1. Hooghoudt equation

To account for the extra head loss due to radial flow to the drains, two simplifications were followed in Hooghoudt theory. The first was assuming an imaginary impervious layer above the real one, which decreases the thickness of the layer through which the water flows towards the drains. The second was treating horizontal and radial flow to drains as an equivalent flow to imaginary ditches with their bottoms on an imaginary impervious layer at a

reduced depth. In other words, the equivalent depth (d_e) represents an imaginary thinner soil layer through which the same amount of water will flow horizontally per unit time as in the actual situation. In equation 1, replacing the term $(D_i - D_d)$ by (d_e) ,

$$Q L^2 = 8 K_b d_e (D_d - D_w) + 4 K_a (D_d - D_w)^2 \dots\dots\dots(2)$$

To determine the equivalent depth, a relationship was derived by Hooghoudt between the equivalent depth (d_e), the spacing (L), the depth to the impervious layer ($D_i - D_d$), and the radius of the drain (r_0). To simplify this relationship, tables were established for the most common sizes of drain pipes, from which the equivalent depth (d_e) can be attained.

Exact solutions for the equivalent depth required for Hooghoudt equation can be calculated from the following two equations, [6], where $D = (D_i - D_d)$.

$$\text{For } D < L/4, \quad d_e = \frac{D}{\frac{8D}{\pi L} \ln \frac{D}{\pi r_0} + 1} \dots\dots\dots(3)$$

$$\text{For } D > L/4, \quad d_e = \frac{\pi L}{8 \ln \frac{L}{\pi r_0}} \dots\dots\dots(4)$$

Many attempts were done to calculate the equivalent depth in order to get the laterals spacing for the subsurface drainage systems. Chieng et al, [7], introduced some graphs for the equivalent depth versus the depth to impermeable layer for a range of pipe sizes and spacing between laterals.

A drain spacing formula has been derived considering the variation in flow and the area above the drain level in the radial flow zone, [8]. The extent of radial flow zone is found to be $2/\pi$ times the thickness of soil layer below the drains. Hooghoudt equation based on equivalent depth is accurate enough to be used for drain spacing, but the computed water surface profile in the radial flow zone differs considerably from that computed by the new method.

3. SPREAD SHEETS FOR LATERALS SPACING DESIGN OF STEADY STATE SUBSURFACE DRAINAGE SYSTEMS

Spread sheets are efficient, accurate, and simple way that can be applied to solve many issues in hydraulics and water resources. For instance, Microsoft Excel software, as a common popular spread sheet, was employed to get the best hydraulic trapezoidal sections for open channels with different side slopes, [9]. Also, an additional solution was obtained concerning the velocity of water through the trapezoidal best hydraulic sections.

In this paper, Microsoft spread sheet software Excel is employed to get the laterals spacing design of steady state subsurface drainage systems. Equation 2 is used to get the spacing L , substituting by equation 3 to obtain the equivalent depth.

As shown in figure 2, given data are D , r_0 , K_a , K_b , h and Q , where:

- D : depth to the impermeable layer, $(D_i - D_d)$, m
- r_0 : radius of the pipe lateral, m
- K_a : hydraulic conductivity of the soil above drain level, m/day
- K_b : hydraulic conductivity of the soil below drain level, m/day
- h : elevation of the water table midway between the drains, $(D_d - D_w)$, m
- Q : drainage rate, m/day

Then, the lateral spacing L is assumed. Calculations are done through the spread sheet and the final result of L is obtained. Check for the obtained L is established with respect to the assumed value. Also, another check is employed for the equivalent depth d_e , where $D/L < 0.25$ as stated in equation 3.

For the case shown in figure 2, the depth to impermeable layer (D) is 2.5 m, the lateral pipe radius (r_0) is 0.1 m, hydraulic conductivities of the soil above and below drain level (K_a and K_b) are the same with the value of 1 m/day, elevation of the water table midway between the drains (h) is 0.2 m, and drainage rate (Q) is 0.001 m/day.

It is assumed first that the lateral spacing (L_{assumed}) is 50 m. Then calculations through the spread sheet obtain a value of 58.29 m for the spacing (L) with 16.5% difference with respect to the assumed value. Other values are assumed for L till difference with respect to the assumed value becomes close to zero. Thus the required spacing is 59 m with only 0.19% difference with respect to the assumed value. Also the check for the equivalent depth (d_e) is satisfied, where the value of D/L is less than 0.25.

Given	D , m	2.5	2.5	2.5	2.5	2.5
	r_0 , m	0.1	0.1	0.1	0.1	0.1
	K_a , m/day	1	1	1	1	1
	K_b , m/day	1	1	1	1	1
	h , m	0.2	0.2	0.2	0.2	0.2
	Q , m/day	0.001	0.001	0.001	0.001	0.001
	L_{assumed} , m	50	55	58	59	60
Calculated		25	25	25	25	25
		3.218875	3.218875	3.218875	3.218875	3.218875
		8.208133	8.208133	8.208133	8.208133	8.208133
		4.708133	4.708133	4.708133	4.708133	4.708133
		0.235406	0.214006	0.202936	0.199497	0.196172
		1.235406	1.214006	1.202936	1.199497	1.196172
	d_e , m	2.023625	2.059297	2.078247	2.084206	2.09
		0.16	0.16	0.16	0.16	0.16
		3.237800	3.294876	3.325195	3.334730	3.344000
		3.397800	3.454876	3.485195	3.494730	3.504000
		3397.800	3454.876	3485.195	3494.730	3504.000
	L , m	58.2906	58.77819	59.03554	59.11624	59.19459
Results	Check L	16.5813	6.869449	1.785421	0.197028	-1.34234
	Check d_e	0.05	0.045454	0.043103	0.042372	0.041666
Check $L = ((L - L_{\text{assumed}})/L_{\text{assumed}}) * 100$						Check d_e : $D/L < 0.25$

Fig. 2. Spread sheet for laterals spacing design of steady state subsurface drainage systems

4. MIT KENANA AREA IN EGYPT

In Egypt, 100% of cropped area is irrigated, while 88% of this area is drained, [10]. Annually, about 63,000 ha are provided by new subsurface drainage systems while old drainage systems are rehabilitated in about 12,600 ha. A scheme of the employed subsurface drainage systems in Egypt is shown in figure 3.

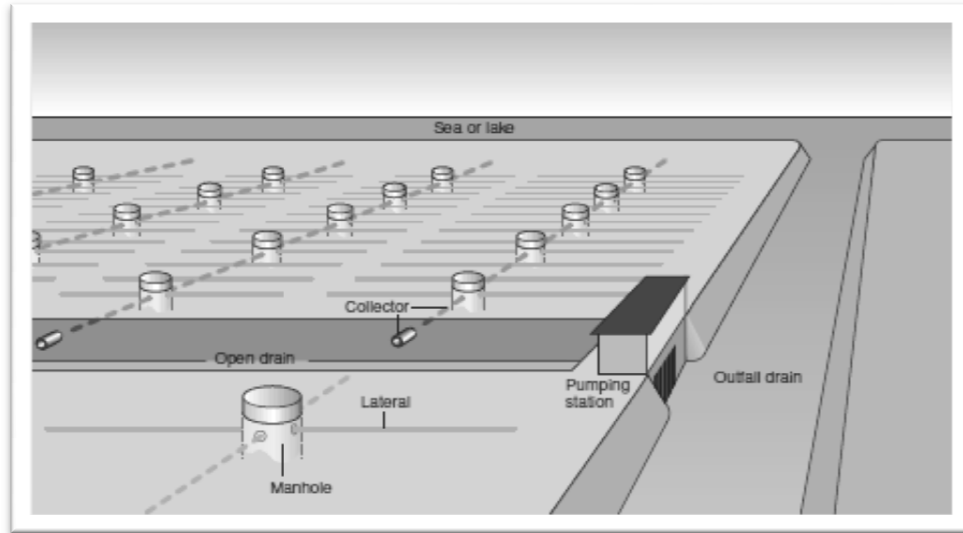


Fig. 3. Scheme of subsurface drainage systems in Egypt

Mit Kenana area is located about 40 km North of Cairo, [11], and it represents the eastern fringes of the Nile Delta. It is 830 feddan (350 ha), with a main irrigation and drainage infrastructure, as shown in figure 4. The soils in the area consist of three layers. The third layer is considered impermeable layer as it has a hydraulic conductivity less than one tenth of that of the second layer. The hydraulic conductivity of the two upper layers is constant through the area with a value of 3 m/day.

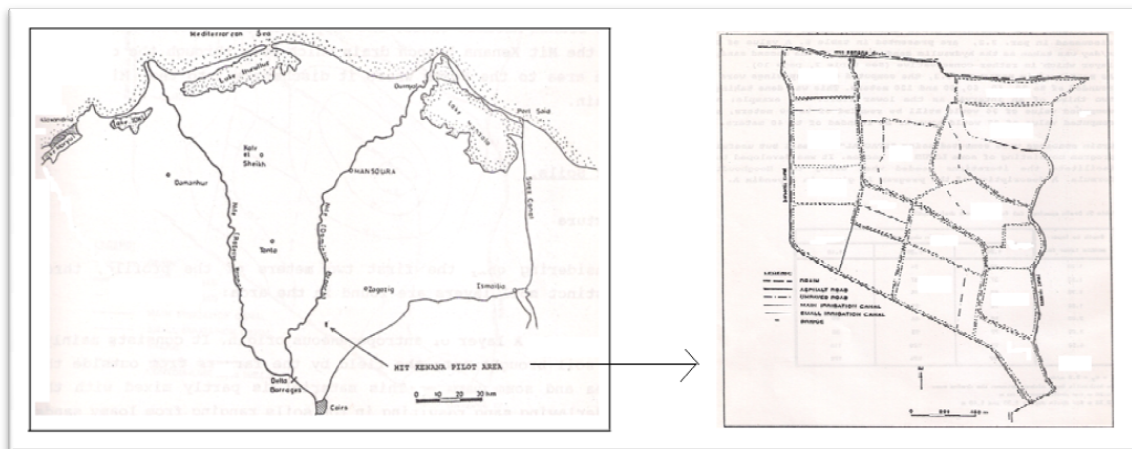


Fig. 4. Mit Kenana area in Egypt

The area is divided into sectors according to the depth to the impermeable layer (D_i), as shown in figure 4. The drain depth (D_d) is 1.2 m in a major part of the area due to limitations of topography and water level in the open drain. In some parts the drain depth has the values of 1.0 m and 1.4 m.

The values for water table depth (D_w) are 0.8 m, 0.9 m and 1.1 m.

The drainage rate (Q) is 0.0015 m/day.

The lateral spacing design is established, [11], and the subsurface drainage system is accomplished for Mit Kenana area. This design is referred to as existing design in this paper.

For the Nile Delta in Egypt, including Mit Kenana area, the water table depth of 0.8 m achieves good conditions for the cultivated crops, [12]. Also, the drainage rate of 0.0012 m/day is acceptable.

5. SPREAD SHEETS FOR LATERALS SPACING DESIGN OF MIT KENANA AREA IN EGYPT

Existing design of Mit Kenana area is reviewed according to the divided sectors and the design data shown in the previous item. Then spread sheets are employed to obtain laterals spacing, which is referred to as spread sheet design. Both existing design and spread sheet design are tabulated in tables 1, 2 and 3.

As shown in table 1, eight different laterals spacing designs are calculated according to the data of the area. Similarly, table 2 includes eight different laterals spacing designs. Finally, table 3 contains six different laterals spacing designs.

Table 1. Existing and spread sheet designs for laterals spacing
[Drain Depth (D_d) = 1.0 m & Elevation of water table midway between drains (h) = 0.2 m]

Depth of Impermeable Layer (D_i), m	Laterals Spacing, m	
	Existing Design	Spread Sheet Design
1.20	30	31
1.35	37	37
1.70	50	50 *
1.80	52	52
2.00	58	58
3.00	77	77
4.50	97	97
10.00	137	137

* Spread sheet that obtained these results is shown in figure 5

Table 2. Existing and spread sheet designs for laterals spacing
[Drain Depth (D_d) = 1.2 m & Elevation of water table midway between drains (h) = 0.3 m]

Depth of Impermeable Layer (D_i), m	Laterals Spacing, m	
	Existing Design	Spread Sheet Design
1.20	34	34
1.35	37	38
1.70	55	55
1.80	59	59
2.00	66	66
3.00	93	93
4.50	120	119
10.00	174	174

Table 3. Existing and spread sheet designs for laterals spacing
[Drain Depth (D_d) = 1.4 m & Elevation of water table midway between drains (h) = 0.3 m]

Depth of Impermeable Layer (D_i), m	Laterals Spacing, m	
	Existing Design	Spread Sheet Design
1.70	46	46
1.80	50	51 *
2.00	59	59

3.00	88	88
4.50	116	116
10.00	172	172 *

* Spread sheets that obtained these results are shown in figures 6 and 7

Three spread sheet designs are shown in figures 5, 6, and 7 as samples.

For each figure, given data are the depth to impermeable layer ($D = D_i - D_d$), the lateral pipe radius ($r_0 = 0.1$ m), hydraulic conductivities of the soil above and below drain level ($K_a = K_b = 3$ m/day), elevation of the water table midway between the drains (h), and drainage rate ($Q = 0.0015$ m/day). The values of (D) and (h) are varying according to the location within the area.

The lateral spacing is assumed first (L_{assumed}), then calculations through the spread sheet obtain another value for the spacing (L). The percentage difference between (L) and (L_{assumed}) with respect to (L_{assumed}) is done to check (L). Other values are assumed for (L) till the difference becomes close to zero.

Also the check for the equivalent depth (d_e) is satisfied, where the value of (D/L) has to be less than 0.25.

Given	D, m	0.7	0.7	0.7	0.7
	r₀, m	0.1	0.1	0.1	0.1
	K_a, m/day	3	3	3	3
	K_b, m/day	3	3	3	3
	h, m	0.2	0.2	0.2	0.2
	Q, m/day	0.0015	0.0015	0.0015	0.0015
	L_{assumed}, m	30	49	50	51
Calculated		7	7	7	7
		1.9459101	1.9459101	1.9459101	1.9459101
		4.9620709	4.9620709	4.9620709	4.9620709
		1.4620709	1.4620709	1.4620709	1.4620709
		0.034115	0.0208867	0.020469	0.0200676
		1.034115	1.0208867	1.020469	1.0200676
	d_e, m	0.6769073	0.6856784	0.6859591	0.686229
		0.48	0.48	0.48	0.48
		3.2491551	3.2912564	3.2926037	3.2938992
		3.7291551	3.7712564	3.7726037	3.7738992
		2486.1034	2514.171	2515.0691	2515.9328
Results	L, m	49.86084	50.141509	50.150465	50.159075
	Check L	66.202801	2.3296107	0.3009301	-1.6488724
	Check d_e	0.0233333	0.0142857	0.014	0.0137255
Check L = ((L-L _{assumed})/L _{assumed})*100					Check d _e : D/L < 0.25

Fig. 5. Spread sheet design, depth of impermeable layer is 1.7 m, drain depth is 1.0 m, and elevation of the water table midway between the drains is 0.2 m

As shown in figure 5 and table 1, depth to impermeable layer (D) is 0.7 m ($D = D_1 - D_d = 1.7 - 1.0$). It is assumed first that the lateral spacing (L_{assumed}) is 30 m. After calculations through the spread sheet, the required spacing is 50 m with only 0.3% difference with respect to the assumed value. The check for the equivalent depth (d_e) is satisfied, where the value of (D/L) is 0.014 (less than 0.25).

Given	D, m	0.4	0.4	0.4
	r₀, m	0.1	0.1	0.1
	K_a, m/day	3	3	3
	K_b, m/day	3	3	3
	h, m	0.3	0.3	0.3
	Q, m/day	0.0015	0.0015	0.0015
	L_{assumed}, m	50	51	52
Calculated		4	4	4
		1.3862944	1.3862944	1.3862944
		3.5350506	3.5350506	3.5350506
		0.0350506	0.0350506	0.0350506
		0.0002804	0.0002749	0.0002696
		1.0002804	1.0002749	1.0002696
	d_e, m	0.3998879	0.3998901	0.3998922
		1.08	1.08	1.08
		2.8791927	2.8792085	2.8792237
		3.9591927	3.9592085	3.9592237
		2639.4618	2639.4723	2639.4825
Results	L, m	51.375692	51.375795	51.375894
	Check L	2.7513849	0.7368532	-1.2002041
	Check de	0.008	0.0078431	0.0076923
Check L = $((L - L_{\text{assumed}}) / L_{\text{assumed}}) * 100$ Check de: $D/L < 0.25$				

Fig. 6. Spread sheet design, depth of impermeable layer is 1.8 m, drain depth is 1.4 m, and elevation of the water table midway between the drains is 0.3 m

Similarly, as shown in figure 6 and table 3, depth to impermeable layer (D) is 0.4 m ($D = D_1 - D_d = 1.8 - 1.4$). It is assumed first that the lateral spacing (L_{assumed}) is 50 m. After calculations through the spread sheet, the required spacing is 51 m with only 0.7% difference with respect to the assumed value. The check for the equivalent depth (d_e) is satisfied, where the value of (D/L) is 0.0078 (less than 0.25).

Finally, as shown in figure 7 and table 3, depth to impermeable layer (D) is 8.6 m ($D = D_1 - D_d = 10.0 - 1.4$). It is assumed first that the lateral spacing (L_{assumed}) is 90 m. After calculations through the spread sheet, the required spacing is 172 m with only 0.3% difference with respect to the assumed value. The check for the equivalent depth (d_e) is satisfied, where the value of (D/L) is 0.05 (less than 0.25).

Given	D, m	8.6	8.6	8.6	8.6
	r₀, m	0.1	0.1	0.1	0.1
	K_a, m/day	3	3	3	3
	K_b, m/day	3	3	3	3
	h, m	0.3	0.3	0.3	0.3
	Q, m/day	0.0015	0.0015	0.0015	0.0015
Assumed	L_{assumed}, m	90	155	172	173
Calculated		0.3142857	0.3142857	0.3142857	0.3142857
		27.363636	27.363636	27.363636	27.363636
		3.309215	3.309215	3.309215	3.309215
		0.2432323	0.1412317	0.1272727	0.126537
		0.8049081	0.467366	0.4211728	0.4187383
		1.8049081	1.467366	1.4211728	1.4187383
	d_e, m	4.7647857	5.8608419	6.0513401	6.061724
		1.08	1.08	1.08	1.08
		34.306457	42.198062	43.569648	43.644413
		35.386457	43.278062	44.649648	44.724413
		23590.971	28852.041	29766.432	29816.275
	L, m	153.59353	169.85889	172.52951	172.6739
Results	Check L	70.659473	9.5863784	0.3078554	-0.1884978
	Check de	0.095556	0.055484	0.05	0.049711
	<div> <div>Check L = ((L-L_{assumed})/L_{assumed})*100</div> <div>Check de: D/L < 0.25</div> </div>				

Fig. 7. Spread sheet design, depth of impermeable layer is 10.0 m, drain depth is 1.4 m, and elevation of the water table midway between the drains is 0.3 m

From these results, it can be seen that both existing design and spread sheet design are approximately identical with negligible differences in limited designs.

6. CONCLUSIONS

Laterals spacing design for steady state subsurface drainage systems employing spread sheets is efficient, accurate, quick, easy and simple. It can be widely used to get the required spacing between the laterals (field drains). Applying this technique on Mit Kenana area in Egypt obtained identical results compared with the existing design. This technique can be applied to get the laterals spacing design quickly and accurately. It can be also used to obtain efficiently the equivalent depth for steady state subsurface drainage systems.

7. REFERENCES

- [1] United States Department of Agriculture (USDA), Natural Resources Conservation Service, 2011. WI 650.1905 Scope and Effect Equations, **Engineering Field Handbook** (EFH) NOTICE 210-WI-121.
- [2] L.B. McCarty et al., 2016, Applied Soil Physical Properties, Drainage, and Irrigation Strategies, Springer International Publishing Switzerland DOI 10.1007/978-3-319-24226-2_2
- [3] Nijland, H.J., F.W. Croon and H.P. Ritzema, 2005. Subsurface Drainage Practices: Guidelines for the implementation, operation and maintenance of subsurface pipe drainage systems. Wageningen, Alterra, ILRI Publication no. 60, pp. 608.
- [4] H.P.Ritzema, 1994, Subsurface flow to drains. Chapter 8 in: H.P.Ritzema (ed.), **Drainage Principles and Applications**, Publ. 16, pp. 236-304, International Institute for Land Reclamation and Improvement (ILRI), Wageningen, The Netherlands. ISBN 90-70754-33-9
- [5] Indian Council of Agricultural Research, www.ecoursesonline.iasri.res.in/mod/page/view.php?id=124524, 31/1/2017.
- [6] Smedema, L.K. and Rycroft, D.W. 1983. "Land Drainage: Planning and design of agricultural drainage systems". Cornell University Press, New York, 376 pages.
- [7] Chieng, S.T., R.S. Broughton, and S.R. Ami, 1981. "Graphical Solutions to Drainage Equations". Canadian Agricultural Engineering, Volume 23, No 2, 91-96.
- [8] G. C. Mishra and V. Singh, 2007. "A new drain spacing formula". Hydrological Sciences Journal, 52:2, 338-351, DOI: 10.1623/hysj.52.2.338
- [9] El-Hazek, A. N. (2012). "Best Hydraulic Sections for Open Channels employing Spread Sheets." VII – International Conference on Environmental Hydrology with 1st Symposium on Environmental Impacts on the Nile Water Resources, Cairo, Egypt.
- [10] Ritzema, H.P., 2007. "Performance Assessment of Subsurface Drainage Systems – Case Studies from Egypt and Pakistan". Wageningen, Alterra, The Netherlands, 137pp.
- [11] Drainage Research Institute, WRC, Ministry of Water Resources and Irrigation, Egypt, and Directorate General for International Cooperation, Ministry of Foreign Affairs, Netherlands, 1992. "Subsurface Drainage System Design Mit Kenana Pilot Area". Technical Report No. 72.
- [12] S. Abdel-Dayem and H.P. Ritzema, 1990. "Verification of Drainage Design Criteria in the Nile Delta, Egypt". Irrigation and Drainage Systems 4: 117-131.