UNDER PEER REVIEW

Original Research Article

PERISTALTIC PUMPING AND DISPERSION OF A MHD COUPLE STRESS FLUID WITH CHEMICAL REACTION AND WALL EFFECTS

Abstract

The dispersion of a solute matter in magneto-hydrodynamic peristaltic pumping of an incompressible couple stress bio-fluid with wall effects is studied. The mean effective coefficient of dispersion on simultaneous homogeneous, heterogeneous chemical reactions has been deliberated through long wavelength assumption and condition of Taylor's limit. The impacts of penetrating parameters on the mean effective dispersion coefficient have been inspected through the graphs. It is found that wall constraints and amplitude ratio favor the scattering, while couple stress and magnetic field constraints resist the scattering during pumping.

Keywords:Chemical reaction; couple stress fluid; dispersion; peristaltic transport; wall properties

2010 Mathematics Subject Classification: 76V05; 76Z05; 76W99; 92C10

1 Introduction

Peristalsis of non-Newtonian liquids has received more attention in recent years in physiological sciences and engineering. In the fluid mechanics point of view, peristaltic creeping is described by dynamic interaction of liquid stream by the movement of stretchy boundaries. In this connection it falls in the field of moving boundary problems in applied mathematics or FSI problems in science and engineering. In the view of its importance, some workers ([1] - [3]) have investigated the peristaltic transport of various fluids under different circumstances.

It is seen that couple stress fluid behavior are exceptionally useful in understanding various mechanical and physiological procedures. The couple stress model introduced by Stokes [4] has distinct features. The main feature of couple stresses is to introduce a size dependent effect. These fluids are able to describe blood, suspension fluids, and various types of lubricants. Such studies clarify the behavior

UNDER PEER REVIEW

of rheological complex liquids. Some studies on peristaltic transport of couple stress fluid have been reported in references ([5] - [8]). The effects of wall on Poiseuille flow with peristalsis have been examined by Mittra and Prasad [9]. After this study, few investigators have explored the wall effects on different fluids with peristalsis ([10] - [12]).
Magnetohydrodynamic (MHD) peristaltic flow nature of liquid is especially imperative in physiological and mechanical procedures. In the existence of magnetic field, many fluids posses an electrically conducting nature, which is an important aspect of the physical situation in the flow problems of magnetohydrodynamics. It is useful for tumor treatment, MRI glancing, blood pumping, reduction of bleeding during surgeries, targeted transportation of drugs, and so on. Magneto-therapy is an essential application to human body. This heals the diseases like ulceration, inflammations and diseases of uterus. Some researchers [13]−[15] have explored the magneto hydrodynamic character of non-Newtonian liquids through different circumstances. They discussed the effects of magnetic field, permeability, micropolar, couple stress, and wall parameters.
Dispersion plays a crucial task in chyme transport and other applications like environmental pollutant transportation, chromatographic separation, the mixing and transport of drugs or toxic substances in physiological structures [16]. The basic theory on dispersion was first proposed by Taylor,[17] investigated theoretically and experimentally that the dispersion of a solute is miscible with a liquid flowing through a channel. Several workers [18]−[21] have investigated the dispersion of a solute in viscous fluid, under different limitations. Furthermore, some investigators [22]−[28] extended this analysis to non Newtonian fluids.
Existing information on the topic witnessed that an analytical treatment of creeping sinusoidal flow and dispersion of a MHD couple stress fluid with chemical reaction and wallproperties has been never reported. Motivated from the reported literature, we have investigated the wall and chemical effects on the creeping sinusoidal stream and dispersion of a MHD couple stress fluid. The investigative expression for mean effective dispersion coefficient has been obtained. The effects of different values of penetrating parameters are discussed in detail through graphs.The present issue might be appropriate for the treatment on intestinal disorder, gallstones in gallbladder without surgery.

2 Formulation of the Problem

Consider the magneto-hydrodynamic couple stress fluid with peristalsis in the 2- dimensional channel. Figure 1 depicts the wave shape.

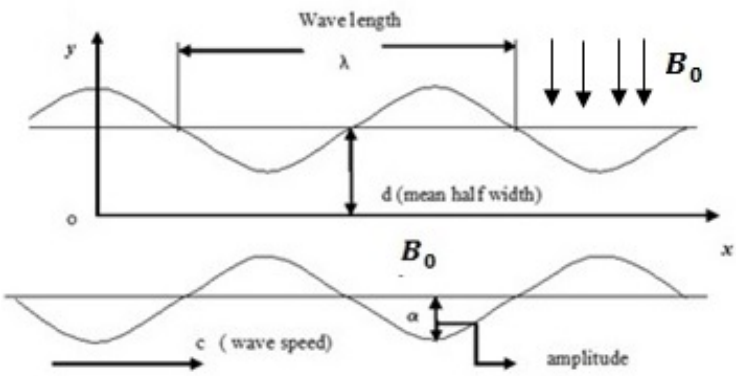

Figure 1: Geometry of the problem.

UNDER PEER REVIEW

The wave shape is given by the subsequent condition:

$$\mathcal{Y} = \pm h = \pm \left[d + a \sin \frac{2\pi}{\lambda} (\mathcal{X} - ct) \right], \tag{2.1}$$

where, the half width of the channel is d, the wavelength of the peristaltic wave is λ, the amplitude of the wave is a, and the wave speed is c.
The relating flow conditions of the current issue are:

$$\frac{\partial \mathcal{U}}{\partial \mathcal{X}} + \frac{\partial \mathcal{V}}{\partial \mathcal{Y}} = 0, \tag{2.2}$$

$$\rho \left[\frac{\partial}{\partial t} + \mathcal{U} \frac{\partial}{\partial \mathcal{X}} + \mathcal{V} \frac{\partial}{\partial \mathcal{Y}} \right] \mathcal{U} = -\frac{\partial p}{\partial \mathcal{X}} + \mu \nabla^2 \mathcal{U} - \eta' \nabla^4 \mathcal{U} - \sigma B_0^2 \mathcal{U}, \tag{2.3}$$

$$\rho \left[\frac{\partial}{\partial t} + \mathcal{U} \frac{\partial}{\partial \mathcal{X}} + \mathcal{V} \frac{\partial}{\partial \mathcal{Y}} \right] \mathcal{V} = -\frac{\partial p}{\partial \mathcal{Y}} + \mu \nabla^2 \mathcal{V} - \eta' \nabla^4 \mathcal{V}, \tag{2.4}$$

where $\frac{\partial^2}{\partial \mathcal{X}^2} + \frac{\partial^2}{\partial \mathcal{Y}^2} = \nabla^2$, $\nabla^2 \nabla^2 = \nabla^4$, the constant associated with couple stress fluid is η', the fluid density is ρ, the viscosity coefficient is μ, the velocity components in the $\mathcal{X}$, $\mathcal{Y}$ direction is $\mathcal{U}$, $\mathcal{V}$, the pressure is p and the magnetic field is B_0.
Referring (Mittra-Prasad [9]), the condition of the flexible wall movement is specified as:

$$\mathcal{L}(h) = p - p_0, \tag{2.5}$$

where, the movement of the stretched membrane by the damping force is $\mathcal{L}$ and is intended by the subsequent equation:

$$\mathcal{L} = -\mathcal{T} \frac{\partial^2}{\partial \mathcal{X}^2} + m \frac{\partial^2}{\partial t^2} + \mathtt{C} \frac{\partial}{\partial t}. \tag{2.6}$$

Here, the coefficient of sticky damping force is $\mathtt{C}$, the mass per/area is m, and the membrane tension is $\mathcal{T}$.
Neglecting the body couples and body strengthens, under long - wavelength theory conditions (2.2) to (2.4) yield as:

$$\frac{\partial \mathcal{U}}{\partial \mathcal{X}} + \frac{\partial \mathcal{V}}{\partial \mathcal{Y}} = 0, \tag{2.7}$$

$$-\frac{\partial p}{\partial \mathcal{X}} + \mu \frac{\partial^2 \mathcal{U}}{\partial \mathcal{Y}^2} - \eta' \frac{\partial^4 \mathcal{U}}{\partial \mathcal{Y}^4} - \sigma B_0^2 \mathcal{U} = 0, \tag{2.8}$$

$$-\frac{\partial p}{\partial \mathcal{Y}} = 0. \tag{2.9}$$

The allied border conditions are

$$\mathcal{U} = 0, \quad \frac{\partial^2 \mathcal{U}}{\partial \mathcal{Y}^2} = 0, \quad \text{at} \quad \mathcal{Y} = \pm h. \tag{2.10}$$

It is presumed that $p_0 = 0$ and the channel walls are inextensible; therefore, the straight displacement of the wall is nil and only lateral movement takes place, and

$$\frac{\partial}{\partial \mathcal{X}} \mathcal{L}(h) = \mu \frac{\partial^2 \mathcal{U}}{\partial \mathcal{Y}^2} - \eta' \frac{\partial^4 \mathcal{U}}{\partial \mathcal{Y}^4} - \sigma B_0^2 \mathcal{U} = 0, \quad \text{at} \quad \mathcal{Y} = \pm h, \tag{2.11}$$

where

$$\frac{\partial}{\partial \mathcal{X}} \mathcal{L}(h) = \frac{\partial p}{\partial \mathcal{X}} = P' = -\mathcal{T} \frac{\partial^3 h}{\partial \mathcal{X}^3} + m \frac{\partial^3 h}{\partial \mathcal{X} \partial t^2} + \mathtt{C} \frac{\partial^2 h}{\partial \mathcal{X} \partial t}. \tag{2.12}$$

Solving the conditions (2.8) and (2.9) with (2.10) and (2.11) we obtain

UNDER PEER REVIEW

$$\mathcal{U}(\mathcal{Y}) = -\frac{1}{\sigma B_0^2}\left(\frac{\partial p}{\partial \mathcal{X}}\right)\left[A_1'\cosh(m_1'\mathcal{Y}) + A_2'\cosh(m_2'\mathcal{Y}) + 1\right], \tag{2.13}$$

where, $m_1' = \sqrt{\frac{\mu}{2\eta'}\left(1+\sqrt{1-\frac{4\eta'\sigma B_0^2}{\mu^2}}\right)}$, $m_2' = \sqrt{\frac{\mu}{2\eta'}\left(1-\sqrt{1-\frac{4\eta'\sigma B_0^2}{\mu^2}}\right)}$.
The mean speed is specified as:

$$\bar{\mathcal{U}} = \frac{1}{2h}\int_{-h}^{h}\mathcal{U}(\mathcal{Y})d\mathcal{Y}. \tag{2.14}$$

Conditions (2.13) and (2.14) yield as:

$$\bar{\mathcal{U}} = -\frac{1}{\sigma B_0^2}\left(\frac{\partial p}{\partial \mathcal{X}}\right)\left[\frac{A_1'}{m_1'h}\sinh(m_1'h) + \frac{A_2'}{m_2'h}\sinh(m_2'h) + 1\right]. \tag{2.15}$$

Utilizing Ravikiran-Radhakrishnamacharya [27], the liquid speed is given by the condition:

$$\mathcal{U}_{\mathcal{X}} = \mathcal{U} - \bar{\mathcal{U}}. \tag{2.16}$$

Conditions (2.13), (2.15) and (2.16) yield as:

$$\mathcal{U}_{\mathcal{X}} = -\frac{1}{\sigma B_0^2}\left(\frac{\partial p}{\partial \mathcal{X}}\right)\left[A_1'\cosh(m_1'\mathcal{Y}) + A_2'\cosh(m_2'\mathcal{Y}) - \frac{A_1'}{m_1'h}\sinh(m_1'h) - \frac{A_2'}{m_2'h}\sinh(m_2'h)\right], \tag{2.17}$$

where
$A_1' = \frac{(m_2')^2}{\left[(m_1')^2-(m_2')^2\right]\cosh(m_1'h)}$, $A_2' = \frac{-(m_1')^2}{\left[(m_1')^2-(m_2')^2\right]\cosh(m_2'h)}$,
$P' = -\mathcal{T}\frac{\partial^3 h}{\partial \mathcal{X}^3} + m\frac{\partial^3 h}{\partial \mathcal{X}\partial t^2} + \mathtt{C}\frac{\partial^2 h}{\partial \mathcal{X}\partial t}$.

2.1 Heterogeneous-homogeneous chemical reactions with Diffusion

Alluding Gupta-Gupta [20], the scattering condition for the concentration $\mathcal{C}$ of the material for the current issue in isothermal circumstances is

$$\frac{\partial \mathcal{C}}{\partial t} + \mathcal{U}\frac{\partial \mathcal{C}}{\partial \mathcal{X}} = \mathcal{D}\frac{\partial^2 \mathcal{C}}{\partial \mathcal{Y}^2} - k_1\mathcal{C}. \tag{2.18}$$

Here, the rate constant of first order chemical response is k_1, the molecular diffusion coefficient is $\mathcal{D}$ and liquid concentration is $\mathcal{C}$.
The dimensionless quantities are specified as:

$$\eta = \frac{\mathcal{Y}}{d}, \xi = \frac{(\mathcal{X}-\bar{\mathcal{U}}t)}{\lambda}, \mathcal{H} = \frac{h}{d}, \mathcal{P} = \frac{d^2}{\mu c\lambda}P', \theta = \frac{t}{\bar{t}}, \bar{t} = \frac{\lambda}{\bar{\mathcal{U}}}, \mathcal{M} = \sqrt{\frac{\sigma B_0^2 d^2}{\mu}}. \tag{2.19}$$

For the regular estimations of physiologically essential parameters of this issue, it is normal that $\bar{\mathcal{U}}\approx\mathcal{C}$ (Ravikiran-Radhakrishnamacharya [27]).
To proceed further, we use $\bar{\mathcal{U}}\approx\mathcal{C}$, in condition(2.18) and the conditions (2.12), (2.17), (2.18) are nondimensionalized as:

$$\mathcal{P} = -\epsilon\left[-\mathcal{E}_3(2\pi)^2\sin(2\pi\xi) + (\mathcal{E}_1+\mathcal{E}_2)(2\pi)^3\cos(2\pi\xi)\right], \tag{2.20}$$

$$\mathcal{U}_{\mathcal{X}} = -\frac{1}{\sigma B_0^2}\frac{\partial p}{\partial \mathcal{X}}\left[A_1\cosh(m_1\eta) + A_2\cosh(m_2\eta) + A_3\right], \tag{2.21}$$

UNDER PEER REVIEW

$$\frac{\partial^2 \mathcal{C}}{\partial \eta^2} - \frac{k_1 d^2}{\mathcal{D}}\mathcal{C} = \frac{d^2}{\lambda \mathcal{D}}\mathcal{U}_{\mathcal{X}}\frac{\partial \mathcal{C}}{\partial \xi}, \tag{2.22}$$

where $m_1 = m_1' d = \sqrt{\frac{\gamma^2}{2}\left(1+\sqrt{1-\frac{4\mathcal{M}^2}{\gamma^2}}\right)}$, $m_2 = m_2' d = \sqrt{\frac{\gamma^2}{2}\left(1-\sqrt{1-\frac{4\mathcal{M}^2}{\gamma^2}}\right)}$,
the amplitude ratio is $\epsilon\left(=\frac{a}{d}\right)$, the rigidity is $\mathcal{E}_1\left(=-\frac{\mathcal{T}d^3}{\lambda^3\mu c}\right)$, the stiffness is $\mathcal{E}_2 = \left(\frac{mcd^3}{\lambda^3\mu}\right)$,
the viscous damping force in the wall is $\mathcal{E}_3 = \left(\frac{\mathsf{c}d^3}{\mu\lambda^2}\right)$, the couple stress constraint is $\gamma\left(=d\sqrt{\frac{\mu}{\eta'}}\right)$
and the magnitic field constraint is $\mathcal{M}\left(=B_0 d\sqrt{\frac{\sigma}{\mu}}\right)$.
The dispersion with first- order irreversible chemical response occur in the mass of the liquid and at the channel walls. Referring Chandra-Phlip [23], the wall conditions are specified as

$$\frac{\partial \mathcal{C}}{\partial \mathcal{Y}} + f\mathcal{C} = 0 \quad \text{at} \quad \mathcal{Y} = h = [a\sin\frac{2\pi}{\lambda}(\mathcal{X}-\bar{\mathcal{U}}t)+d], \tag{2.23}$$

$$\frac{\partial \mathcal{C}}{\partial \mathcal{Y}} - f\mathcal{C} = 0 \quad \text{at} \quad \mathcal{Y} = -h = -[a\sin\frac{2\pi}{\lambda}(\mathcal{X}-\bar{\mathcal{U}}t)+d]. \tag{2.24}$$

Condition (2.19), (2.23) and (2.24) yields as:

$$\frac{\partial \mathcal{C}}{\partial \eta} + \beta\mathcal{C} = 0 \quad \text{at} \quad \eta = \mathcal{H} = [\epsilon\sin(2\pi\xi)+1], \tag{2.25}$$

$$\frac{\partial \mathcal{C}}{\partial \eta} - \beta\mathcal{C} = 0 \quad \text{at} \quad \eta = -\mathcal{H} = -[\epsilon\sin(2\pi\xi)+1], \tag{2.26}$$

where the heterogeneous response rate constraint is $\beta = \mathcal{F}d$, relating to catalytic response at the dividers.
Utilizing conditions (2.25) and (2.26), the primitive of (2.22) is obtained as:

$$\mathcal{C}(\eta) = -\frac{d^2}{\lambda\mathcal{D}}\frac{1}{\sigma B_0^2}\frac{\partial \mathcal{C}}{\partial \xi}\frac{\partial p}{\partial \mathcal{X}}\Big[A_4\cosh(m_1\eta) + A_5\cosh(m_2\eta) + A_6\cosh(\alpha\eta) + A_7\Big]. \tag{2.27}$$

The volumetric flow rate $\mathscr{Q}$ is specified as

$$\mathscr{Q} = \int_{-\mathcal{H}}^{\mathcal{H}} \mathcal{C}\mathcal{U}_{\mathcal{X}}\, d\eta. \tag{2.28}$$

Using conditions (2.21) and (2.27) in (2.28), we obtain

$$\mathscr{Q} = -2\frac{d^6}{\lambda\mu^2\mathcal{D}}\frac{\partial \mathcal{C}}{\partial \xi}\mathcal{G}(\xi,\epsilon,\alpha,\beta,\mathcal{E}_1,\mathcal{E}_2,\mathcal{E}_3,\mathcal{M},\gamma), \tag{2.29}$$

where

$$\mathscr{G}(\xi,\epsilon,\alpha,\beta,\mathcal{E}_1,\mathcal{E}_2,\mathcal{E}_3,\mathcal{M},\gamma) = -\frac{P^2}{\mathcal{M}^4}\Big[\frac{A_1A_4}{2}B_1 + \frac{A_2A_5}{2}B_2 + (A_1A_5+A_2A_4)B_3 + A_1A_6B_4$$
$$+ A_2A_6B_5 + (A_1A_7+A_3A_4)B_6 + (A_2A_7+A_3A_5)B_7 + A_3A_6B_8 + A_3A_7\mathcal{H}\Big],$$

$A_1 = \frac{(m_2)^2}{\left[(m_1)^2-(m_2)^2\right]\cosh(m_1\mathcal{H})}$, $A_2 = \frac{-(m_1)^2}{\left[(m_1)^2-(m_2)^2\right]\cosh(m_2\mathcal{H})}$,
$A_3 = \frac{-(m_2)^2\sinh(m_1\mathcal{H})}{m_1\mathcal{H}\left[(m_1)^2-(m_2)^2\right]\cosh(m_1\mathcal{H})} + \frac{(m_1)^2\sinh(m_2\mathcal{H})}{m_2\mathcal{H}\left[(m_1)^2-(m_2)^2\right]\cosh(m_2\mathcal{H})}$,

$A_4 = \frac{(m_2)^2}{\left[(m_1)^2-(\alpha)^2\right]\left[(m_1)^2-(m_2)^2\right]\cosh(m_1\mathcal{H})}$, $A_6 = A_3L_1 - A_4L_2 - A_5L_3$,

$A_5 = \frac{-(m_1)^2}{\left[(m_2)^2-(\alpha)^2\right]\left[(m_1)^2-(m_2)^2\right]\cosh(m_2\mathcal{H})}$, $A_7 = -\frac{A_3}{\alpha^2}$,

UNDER PEER REVIEW

$L_1 = \frac{\beta}{\alpha^2(\alpha\sinh(\alpha\mathcal{H})+\beta\cosh(\alpha\mathcal{H})}, \qquad L_2 = \frac{(m_1\sinh(m_1\mathcal{H})+\beta\cosh(m_1\mathcal{H}))}{(\alpha\sinh(\alpha\mathcal{H})+\beta\cosh(\alpha\mathcal{H}))},$

$L_3 = \frac{(m_2\sinh(m_2\mathcal{H})+\beta\cosh(m_2\mathcal{H}))}{(\alpha\sinh(\alpha\mathcal{H})+\beta\cosh(\alpha\mathcal{H}))}, \qquad B_1 = \frac{2m_1\mathcal{H}+\sinh(2m_1\mathcal{H})}{2m_1},$

$B_2 = \frac{2m_2\mathcal{H}+\sinh(2m_2\mathcal{H})}{2m_2}, \quad B_6 = \frac{\sinh(m_1\mathcal{H})}{m_1}, \quad B_7 = \frac{\sinh(m_2\mathcal{H})}{m_2}, \quad B_8 = \frac{\sinh(\alpha\mathcal{H})}{\alpha},$

$B_3 = \frac{m_1\sinh(m_1\mathcal{H})\cosh(m_2\mathcal{H})-m_2\cosh(m_1\mathcal{H})\sinh(m_2\mathcal{H})}{\left[(m_1)^2-(m_2)^2\right]},$

$B_4 = \frac{m_1\sinh(m_1\mathcal{H})\cosh(\alpha\mathcal{H})-\alpha\cosh(m_1\mathcal{H})\sinh(\alpha\mathcal{H})}{\left[(m_1)^2-(\alpha)^2\right]},$

$B_5 = \frac{m_2\sinh(m_2\mathcal{H})\cosh(\alpha\mathcal{H})-\alpha\cosh(m_2\mathcal{H})\sinh(\alpha\mathcal{H})}{\left[(m_2)^2-(\alpha)^2\right]}, \qquad \alpha = \sqrt{\frac{k_1}{\mathcal{D}}}d.$

Looking at condition (2.29) with Fick's law of scattering, the dispersing coefficient D^* was computed to such an extent that the solute disperses near to the plane moving with the typical speed of the flow and is specified as

$$\mathcal{D}^* = 2\frac{d^6}{\mu^2\mathcal{D}}\mathscr{G}(\xi,\epsilon,\alpha,\beta,\mathcal{E}_1,\mathcal{E}_2,\mathcal{E}_3,\mathcal{M},\gamma). \tag{2.30}$$

The mean of $\mathscr{G}$ is $\bar{\mathscr{G}}$ and is attained as

$$\bar{\mathscr{G}} = \int_0^1 \mathscr{G}(\xi,\epsilon,\alpha,\beta,\mathcal{E}_1,\mathcal{E}_2,\mathcal{E}_3,\mathcal{M},\gamma)d\xi. \tag{2.31}$$

3 Outcomes and Discussion

The expression for $\bar{\mathscr{G}}(\xi,\epsilon,\alpha,\beta,\mathcal{E}_1,\mathcal{E}_2,\mathcal{E}_3,\mathcal{M},\gamma)$ as shown in equation (2.31) has been obtained by numerical integration using the software MATHEMATICA and the domino effects are presented through graphs. It may ensure that $\mathcal{E}_1, \mathcal{E}_2$ and $\mathcal{E}_3$ cannot be zero all together.

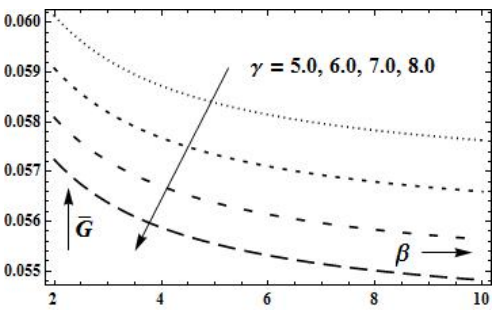

Figure 2: Illustration of $\bar{\mathscr{G}}$ for γ when $\epsilon = 0.2$, $\alpha = 1.0$, $\mathcal{M} = 5.5$, $\mathcal{E}_1 = 0.1$, $\mathcal{E}_2 = 0.0$, $\mathcal{E}_3 = 0.06$

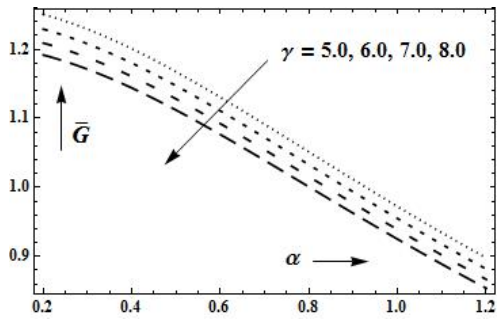

Figure 3: Illustration of $\bar{\mathscr{G}}$ for γ when $\epsilon = 0.2$, $\beta = 5.0$, $\mathcal{M} = 5.5$, $\mathcal{E}_1 = 0.1$, $\mathcal{E}_2 = 4.0$, $\mathcal{E}_3 = 0.06$

The effects of the couple stress constraint (γ) and magnetic field constraint $(\mathcal{M})$ on the scattering coefficient $(\bar{\mathscr{G}})$ are depicted in Figs. 2-7. It is observed that $\bar{\mathscr{G}}$ descends with an increase in couple stress constraint (γ) (Figs. 2-4). Increase in couple stress constraint leads to lessen the pressure on the flow of fluid which descends the fluid velocity, as a result dispersion may reduce. This finding agrees with the conclusion of Alemayehu-Radhakrishnamacharya [25]. Figures 5-7 depicts that $\bar{\mathscr{G}}$ descends with an increase in magnetic field constraint $(\mathcal{M})$. Increase in magnetic field constraint leads to drop in the fluid velocity and as a result dispersion diminishes. This finding agrees with the

UNDER PEER REVIEW

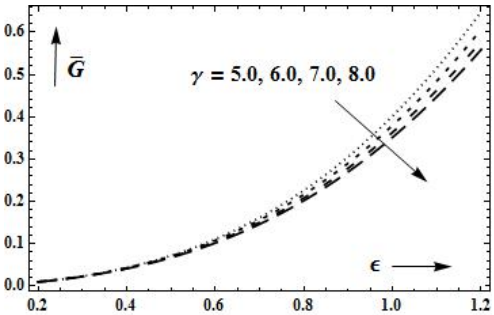

Figure 4: Illustration of $\bar{\mathscr{G}}$ for γ when $\alpha = 1.0$, $\beta = 5.0$, $\mathcal{M} = 5.5$, $\mathcal{E}_1 = 0.1$, $\mathcal{E}_2 = 4.0$, $\mathcal{E}_3 = 0.00$

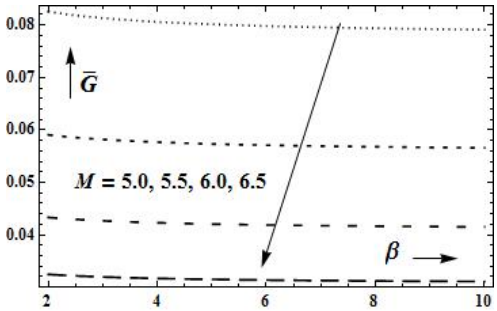

Figure 5: Illustration of $\bar{\mathscr{G}}$ for $\mathcal{M}$ when $\epsilon = 0.2$, $\alpha = 1.0$, $\gamma = 6.0$, $\mathcal{E}_1 = 0.1$, $\mathcal{E}_2 = 0.0$, $\mathcal{E}_3 = 0.06$

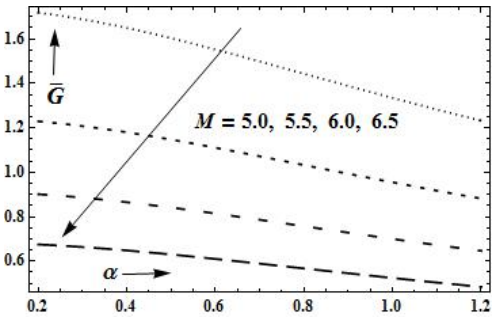

Figure 6: Illustration of $\bar{\mathscr{G}}$ for $\mathcal{M}$ when $\epsilon = 0.2$, $\beta = 5.0$, $\gamma = 6.0$, $\mathcal{E}_1 = 0.1$, $\mathcal{E}_2 = 4.0$, $\mathcal{E}_3 = 0.06$

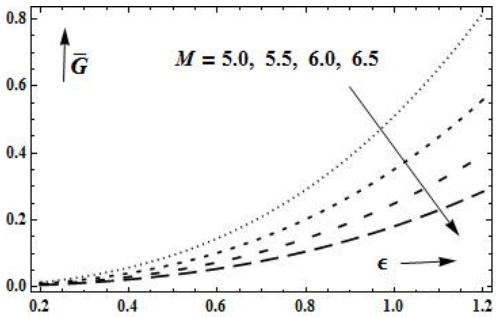

Figure 7: Illustration of $\bar{\mathscr{G}}$ for $\mathcal{M}$ when $\alpha = 1.0$, $\beta = 5.0$, $\gamma = 6.0$, $\mathcal{E}_1 = 0.1$, $\mathcal{E}_2 = 4.0$, $\mathcal{E}_3 = 0.00$

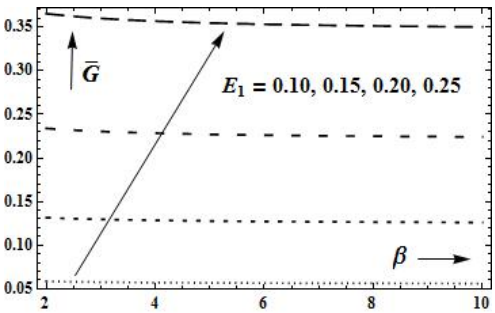

Figure 8: Illustration of $\bar{\mathscr{G}}$ for $\mathcal{E}_1$ when $\epsilon = 0.2$, $\alpha = 1.0$, $\mathcal{M} = 5.5$, $\gamma = 6.0$, $\mathcal{E}_2 = 0.0$, $\mathcal{E}_3 = 0.0$

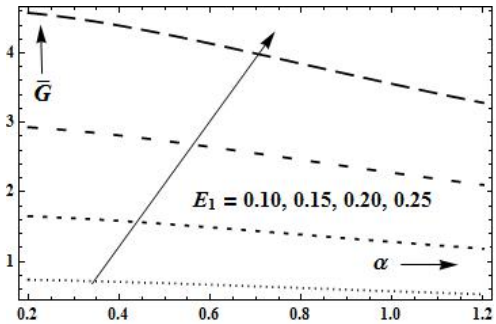

Figure 9: Illustration of $\bar{\mathscr{G}}$ for $\mathcal{E}_1$ with $\epsilon = 0.2$, $\beta = 5.0$, $\mathcal{M} = 5.5$, $\gamma = 6.0$, $\mathcal{E}_2 = 0.0$, $\mathcal{E}_3 = 0.06$

UNDER PEER REVIEW

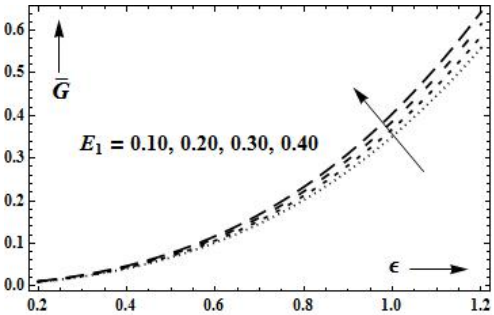

Figure 10: Illustration of $\bar{\mathscr{G}}$ for $\mathcal{E}_1$ when $\alpha = 1.0$, $\beta = 5.0$, $\mathcal{M} = 5.5$, $\gamma = 6.0$, $\mathcal{E}_2 = 4.0$, $\mathcal{E}_3 = 0.00$

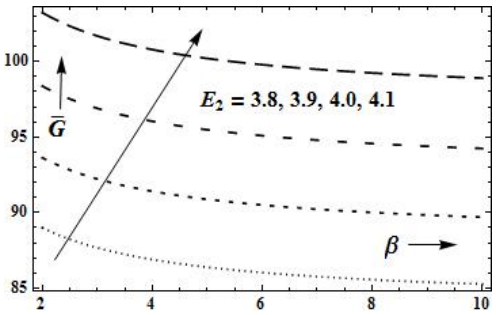

Figure 11: Illustration of $\bar{\mathscr{G}}$ for $\mathcal{E}_2$ when $\epsilon = 0.2$, $\alpha = 1.0$, $\mathcal{M} = 5.5$, $\gamma = 6.0$, $\mathcal{E}_1 = 0.1$, $\mathcal{E}_3 = 0.00$

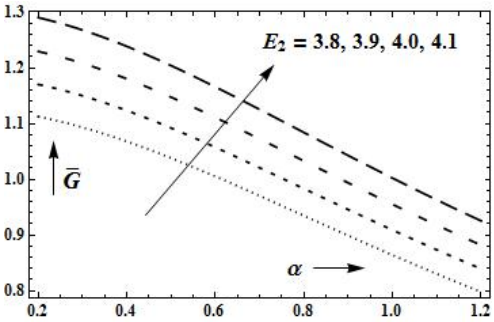

Figure 12: Illustration of $\bar{\mathscr{G}}$ for $\mathcal{E}_2$ when $\epsilon = 0.2$, $\beta = 5.0$, $\mathcal{M} = 5.5$, $\gamma = 6.0$, $\mathcal{E}_1 = 0.1$, $\mathcal{E}_3 = 0.06$

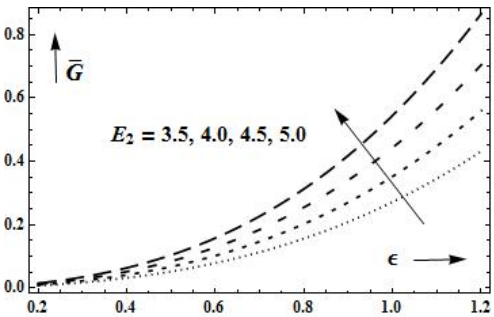

Figure 13: Illustration of $\bar{\mathscr{G}}$ for $\mathcal{E}_2$ when $\alpha = 1.0$, $\beta = 5.0$, $\mathcal{M} = 5.5$, $\gamma = 6.0$, $\mathcal{E}_1 = 0.1$, $\mathcal{E}_3 = 0.06$

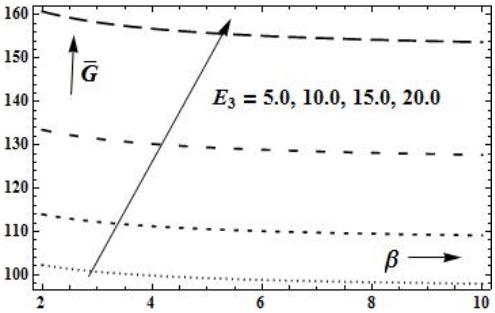

Figure 14: Illustration of $\bar{\mathscr{G}}$ for $\mathcal{E}_3$ when $\epsilon = 0.2$, $\alpha = 1.0$, $\mathcal{M} = 5.5$, $\gamma = 6.0$, $\mathcal{E}_1 = 0.1$, $\mathcal{E}_2 = 4.0$

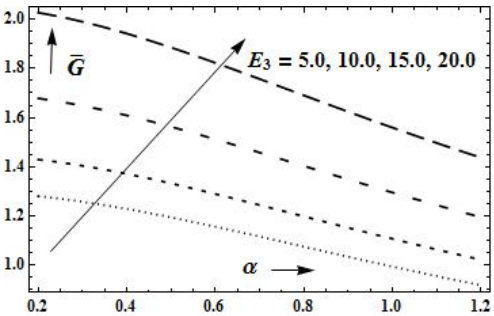

Figure 15: Illustration of $\bar{\mathscr{G}}$ for $\mathcal{E}_3$ when $\epsilon = 0.2$, $\beta = 5.0$, $\mathcal{M} = 5.5$, $\gamma = 6.0$, $\mathcal{E}_1 = 0.1$, $\mathcal{E}_2 = 4.0$

UNDER PEER REVIEW

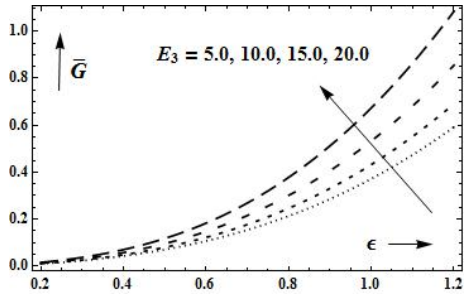

Figure 16: Illustration of $\bar{\mathscr{G}}$ for $\mathcal{E}_3$ when $\alpha = 1.0$, $\beta = 5.0$, $\mathcal{M} = 5.5$, $\gamma = 6.0$, $\mathcal{E}_1 = 0.1$, $\mathcal{E}_2 = 4.0$

conclusion of Ravikiran-Radhakrishnamacharya [27].
The impacts of the rigidity constraint $(\mathcal{E}_1)$, stiffness constraint $(\mathcal{E}_2)$ and viscous damping force $(\mathcal{E}_3)$ of the wall on the dissipating coefficient $(\bar{\mathscr{G}})$ are illustrated in Figs. 8-16. It is experiential that $\bar{\mathscr{G}}$ ascends monotonically with an expansion in $\mathcal{E}_1, \mathcal{E}_2$ and $\mathcal{E}_3$. This understanding might be true that increment in the flexibility of the channel walls help the stream moment which causes to enhance the dispersion. Furthermore, $\bar{\mathscr{G}}$ ascends with an increment in the amplitude ratio (ϵ) (Figs. 4, 7, 10, 13 and 16). As already known, increment in the amplitude ratio is the expansion in the amplitude of the wave across the channel and this cause to increase the fluid velocity within the channel and consequently dispersion may enhance. This outcome concurs with that of [21] and [27].
It is seen that $\bar{\mathscr{G}}$ descends with an increase in the homogeneous compound response rate constraint (α) (Figs. 3, 6, 9, 12, and 15). Also, it is noticed from the figures 2, 5, 8, 11, and 14 that the scattering diminishes with heterogeneous substance response rate constraint (β), and the decrease in the effective scattering coefficient is sharp in a section near to the wall. This agrees with chemical point of view because the reactions which affect diffusion happen only at the surface for heterogeneous substance response. This implies that heterogeneous substance response tends to decrease the scattering of the solute.

4 Conclusions

The effects of magnetic constraint $(\mathcal{M})$, couple stress constraint (γ), amplitude ratio (ϵ), homogeneous response rate (α), heterogeneous response rate (β), rigidity $(\mathcal{E}_1)$, stiffness $(\mathcal{E}_2)$, damping characteristic $(\mathcal{E}_3)$ of the wall on scattering coefficient $(\bar{\mathscr{G}})$ have been inspected for peristaltic pumping of a couple stress fluid. It is of great importance for the movement of blood in artery, bolus in esophugus, bile in bile duct and chyme in small intestine of the digestive system.

• It is seen that the concentration profile $(\bar{\mathscr{G}})$ rises with an increase in amplitude ratio and wall constraints.

• It is noticed that concentration profile $(\bar{\mathscr{G}})$ descends with rise in heterogeneous response rate, homogeneous response rate, couplse stress and magnetic field constraints.

• Finally, rigidity $(\mathcal{E}_1)$, stiffness $(\mathcal{E}_2)$, damping force $(\mathcal{E}_3)$ of the wall and amplitude ratio (ϵ) favour the dispersion, while couple stress constraint (γ) homogeneous response rate constraint (α) and heterogeneous response rate constraint (β) resist the dispersion.

UNDER PEER REVIEW

References

[1] Fung YC, Yin F. Peristaltic transport, Journal of Applied Mechanics Trans. ASME. 1968;5:669-675.

[2] Jaffrin MY, Shapiro AH, Weinberg SL. Peristaltic pumping with long wavelengths at low Reynolds number, Journal Fluid Mechanics. 1969;37:799-825.

[3] Misra JC, Pandey SK. Peristaltic flow of a multilayered power law fluid through a cylindrical tube, International Journal of Engineering Science. 2001;39:387-402.

[4] Stokes VK. Couple stress fluids, Physics of Fluids. 1966;9:1709-1715.

[5] Srivastava LM. Peristaltic transport of a couple stress fluid, Rheologica Acta. 1968;25:638-641.

[6] Elshehawey EF, Mekheimer Kh S. Couple stress in peristaltic transport of fluids, Journal of Physics D.1994;27:163-1170.

[7] Mekheimer Kh S. Peristaltic transport of a couple stress fluid in a non-uniform channels, Journal of Biorheology. 2002; 44:125-138.

[8] Ali N, Hayat T, Sajid M. Peristaltic flow of a couple stress fluid in asymmetric channel, Journal of Biorheology. 2007;44:125-138.

[9] Mittra TK, Prasad NS. On the influence of wall properties and poiseuille flow in Peristalsis, Journal of Biomechanics. 1973;6:681-693.

[10] Hina S, Mustafa M, Hayat T. On the exact solution for peristaltic flow of couple stress fluid with wall properties, Bulgarian chemical communications. 2015; 47(1):30-37.

[11] Pandey SK, Chaube MK. Study of wall properties on peristaltic transport of a couple stress fluid, Meccanica. 2011; 46:1319-1330.

[12] Muthu P, Ratishkumar BV, Chandra P. On the influence of wall properties in the peristaltic motion of micropolar fluid, ANZIAM Journal. 2003;45:246-260.

[13] Mekheimer Kh S. Effect of the induced magnetic field on the peristaltic flow of a couple stress, Phy. Lett. A. 2008;372:4271-4278.

[14] Sankad GC, Radhakrishnamacharya G. Effect of Magnetic Field on Peristaltic Motion of Micropolar Fluid with Wall Effects, Journal of Applied Mathematics and Fluid Mechanics. 2009;1:37-50.

[15] Tripathi D, Beg OA. Magnetohydrodynamic peristaltic flow of a couple stress fluid through coaxial channels containing a porous medium, Journal of Mechanics in Medicine and Biology. 2012;12(5):1250088-1-20.

[16] Ng NO. Dispersion in steady and oscillatory flows through a tube with reversible and irreversible wall reactions, Proceedings of Royal Society London. 2006;A.463:481-515.

[17] Taylor GI. Dispersion of soluble matter in solvent flowing slowly through a tube, Proceedings of Royal Society of London. 1953;A.219:186-203.

[18] Aris A. On the dispersion of a solute in a fluid flowing through a tube, Proceedings of Royal Society of London. 1656;A.35: 67-77.

[19] Padma D, Ramana VV. Homogeneous and heterogeneous reaction on the dispersion of a solute in MHD Couette flow I, Current Science. 1975;44:803-804.

[20] Gupta PS, Gupta AS. Effect of homogeneous and heterogeneous reactions on the dispersion of a solute in the laminar flow between two plates, Proceedings of Royal Society London. 1972;A,330:59-63.

[21] Sobh AM. Effect of homogeneous and heterogeneous reactions on the dispersion of a solute in MHD Newtonian fluid in an asymmetric channel with peristalsis, British Journal of Mathematics and Computer Science. 2013;3(4):664-679.

UNDER PEER REVIEW

[22] Agarwal RP, Chandra P. Dispersion in simple microwfluid flows, International Journal of Engineering Science. 1983;21:431-442.

[23] Chandra P, Philip D. Effect of heterogeneous and homogeneous reactions on the dis-persion of a solute in simple microwfluid, Indian Journal of Pure Applied Mathematics. 1993;24:551-561.

[24] Dutta BKN, Roy NC, Gupta AS. Dispersion of a solute in a non-Newtonian fluid With Simultaneous chemical reaction, Mathematica- Mechanica fasc. 1974;2:78-82.

[25] Alemayehu H, Radhakrishnamacharya G. Dispersion of solute in peristaltic motion of a couple stress fluid through a porous medium, Tamkang Journal of Mathematics. 2012;43(4):541-555.

[26] Hayat T, Tanveer A, Yasmin H, Alsaedi A. Homogeneous-heterogeneous reactions in peristaltic flow with convective conditions, PLOS one. 2014; 9(12): e113851, http://dx.doi.org/10.1371/journal.pone.0113851.

[27] Ravi Kiran G, Radhakrishnamacharya G. Effect of homogeneous and heterogeneous chemical reactions on peristaltic transport of a MHD micopolar fluid with wall effects, Mathematical Models and Methods in Applied Sciences. 2015;39(6):1349-1360.

[28] Hayat T, Tanveer A, Alsaedi A. Simultaneous effects of radial magnetic field and wall properties on peristaltic flow of Carreau-Yasuda fluid in curved flow configuration, AIP Advances. 2015;5(12): http://dx.doi.org/10.1063/1.4939541.