

CASSAVA

by V MUSONDA

Submission date: 10-Sep-2018 03:56PM (UTC+0200)

Submission ID: 969961286

File name: Ms_JMSRR_44286.pdf (644.71K)

Word count: 3452

Character count: 15963

Original Research Article

CHARACTERIZATION OF CASSAVA CYANIDE ON HEAT TREATED DUCTILE CAST IRON

Abstract

The present study explored the feasibility of using cassava leave (CL) cyanide for surface strengthening of ductile cast irons through heat treatment. Dried cassava leaves were pulverized and sieved to 500µm particle size, the pulverized mass was mixed with BaCl₂ (energizer) at a ratio of 4:1 by weight. Standard ductile iron samples were produced using sand casting technique and the samples were heat treated at temperatures ranging from 750 to 900 °C in steps of 50 °C for the period of 3—5 hours. Characterization of the cynided ductile iron was carried out using JEOL 7600F Field Emission Scanning Electron Microscope (SEM), Oxford X-Man (EDS), PANALYTICAL Empyrian X-Ray Diffractometer (XRD) and LECO ASTM E384 hardness tester. These were with a view to ascertaining the formation of a case within the microstructure and phase formation owing to the heat treatment. The results revealed a graphite nodules surrounded by ferrite in a pearlitic matrix for the as-cast samples while the PCCL-treated samples revealed dark circumfrenclal structures (visible diffusion zone) containing carbides and appreciable amount of nitrides precipitation in a pearlitic matrix (case) while the center reveals a ferritic/pearlite matrix (core).

keywords: Cassava, cyanide, ductile cast iron, surface strengthening

1.0 INTRODUCTION

Ductile cast iron is a versatile engineering material which has formed the subject of leading international research. Cast iron is finding increasing application through materials combination for engineering applications and modification of properties such as mechanical properties (hardness, wear resistance, toughness, ductility, etc) and cost savings (Imasogie and Afonja, 2003). Cast iron is widely used in the manufacturing of components such as machine tool beds, cylinders, cams, and pistons. Ductile cast iron is a grade of cast iron that is regarded as a suitable replacement for steels because it has a relatively low cost, good machinability, a good combination of strength and toughness, a high fatigue resistance, good fluidity, and good wear resistance (Gulzar *et al.*, 2009)

Heat treatments are often applied to ductile iron to create or alter microstructures that improve some mechanical properties such as stress relieving annealing to produce a ferritic matrix, normalizing to produce a pearlitic matrix, hardening to produce martensitic structures, and surface strengthening to produce a hardened case with a tougher core matrix.

The aim of this study is to explore the feasibility of using cassava leave for surface strengthening of ductile iron by thermochemical method of diffusion using cassava leaf as source of cyanide. However, the choice of cassava leaves is based on the amount of cyanoglucoside content present in the leaves which generally ranges from 140 — 1000 ppm depending on the variety, plant age, soil condition, fertilizer application, weather and other factors (Falade and Akingbala, 2011; Komolafe and Arawande 2011). In Nigeria, cassava is at present predominantly used for food and production of cassava remains low in terms of yield per hectare compared to its potential (AIT 2008). Cassava may play a very significant role in surface strengthening since it produces relatively high amounts of Hydrogen cyanide, is easily hydrolysed and has a high content of dry matter (Kosugi *et al.*, 2009). The cellulosic and lignocellulosic content in cassava are also used as feed stocks in production of bio-ethanol (Londo *et al.*, 2009).

2.0 METHODOLOGY

2.1 Production of ductile cast iron

The ductile iron used was cast by charging cast iron scraps, ductile iron returns, engine sleeves, ferro-silicon alloy and ferro-silicon-magnesium, FeSiMg (5% Mg) alloy into a rotary furnace. After melting was achieved between 1350 -1450 °C, inoculation with 2.4 wt. % of ferro-silicon containing 75% Si was done to improve fluidity. Ejection of the metal during dissolution of magnesium was prevented by means of special enclosed reaction vessels for desulphurization and deoxidation treatment (Imasogie *et al.*, 2000). After tapping, inoculation with 0.6 wt.% ferro-silicon containing 75% Si was carried out in the ladle. A reaction chamber which holds the inoculants material in the running system was used to ensure the uniform pouring of inoculants over the whole casting, to achieve a satisfying distribution of spherical graphite and to maximize the efficiency of the inoculant material (Imasogie, 2002).

The melts were tapped and poured into a Y-block shaped mold, according to the ASTM A897M-90 standard, followed by shakeout and appropriate sample preparation.

59 2.2 Pack cyaniding Process

60 The cassava leaves were harvested fresh, oven-dried at 70 °C (Famurewa and Emuekele,
 61 2014) and pulverized to 500 µm using ball mills. Ductile iron samples were machined to a
 62 cylindrical shape of 20mm X 20mm, immersed in a mixed of pulverized cassava leaves
 63 (cyanide source) and Barium chloride BaCl₂ (energizer) at a ratio 4:2 by weight sealed in 50
 64 mm × 500 mm × 500 mm mild steel boxes. The samples were subjected to heat-treatment
 65 process by varying the temperature from 750 °C to 900 °C in steps of 50 °C with holding time of
 66 3 to 5 hrs in steps of 1 hr, total number of 64 samples was produced in all.

67 3.0 Results Discussion

68 3.1 Chemical Analysis

69 The chemical composition of ductile iron in the as-cast condition and alloying element was
 70 determined by Optical Emission spectroscopy and is provided in Tables 1 and 2.

71 Table 1: chemical composition of the produced ductile cast iron

Materials	Fe	C	Si	Mn	P	Mg	S	Cr	Ni
Ductile Cast iron	92.8	3.80	2.60	0.30	0.06	0.05	0.02	0.10	0.07

72

73 Table 2: Commercial Standard Grade Inoculants (Ferro-silicon, 75%) Composition

Elements	Si	P	S	Al	Fe
Composition (%)	75	0.02	0.05	2	Balance

74 The chemical composition of the produced ductile cast iron as presented in Table 1 revealed that
 75 the cast iron has the carbon equivalent value (CEV) of 4.68 which is hyper-eutectic iron and
 76 Figure 1 shows the micrograph of the casted ductile iron.



Figure 1: Micrograph of as-cast ductile iron showing graphite nodules in a pearlitic matrix with free carbide (light irregular particles), 2% nital etched x 500.

3.2 Intermediate-temperature Pack Cyaniding Decomposition Reactions

When cassava leaves are crushed, glucose and acetone cyanohydrin are hydrolysed in the presence of the enzyme *linamarase*, the acetone cyanohydrin decomposes rapidly in neutral or alkaline conditions liberating hydrogen cyanide and acetone as in Figure 2.



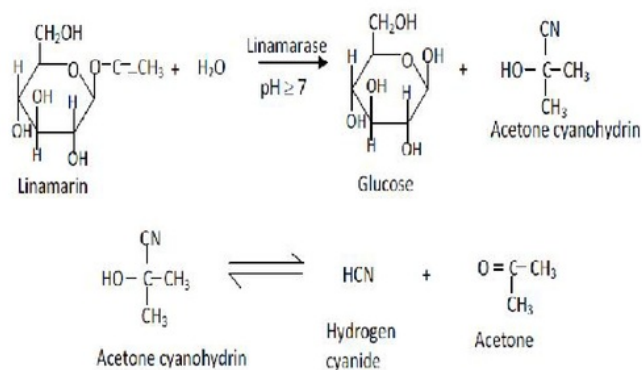



Figure 2: Enzymatic hydrolysis of linamarin (Orijekwe *et al.*, 2013; Mburu *et al.*, 2012)

The following decomposition reactions are proposed for the intermediate-temperature pack cyaniding process:




Where BaCl_2 is the energizer that is used in the intermediate-temperature treatment, the energizer is added to increase the diffusion rate and case depth.

Also, the hydrogen cyanide (HCN) reacts with oxygen gas as follows:



The hydrogen cyanate (HCNO) formed decomposes at the surface of the iron according to the following reaction:



The nitrogen (4N) formed diffuses interstitially into the iron surface during the pack cyaniding process, similar to pack nitriding process (Li and Xiang, 2010).

The cyanide concentration analysis was carried out using the alkaline titration method (Famurewa and Emuekele, 2014). Cyanide concentration, morphology and elemental composition results are presented in Tables 3 and figure 3, while the EDX analyses of the cyanided heat treated sample surface (case) were listed in Table 4.

Table 3: Cyanide value present in the Experimental cassava leaf

S/N	Sample	Titre Value	Cyanide Content HCN (mg/kg)
1	TMS30572	6.038	20.38



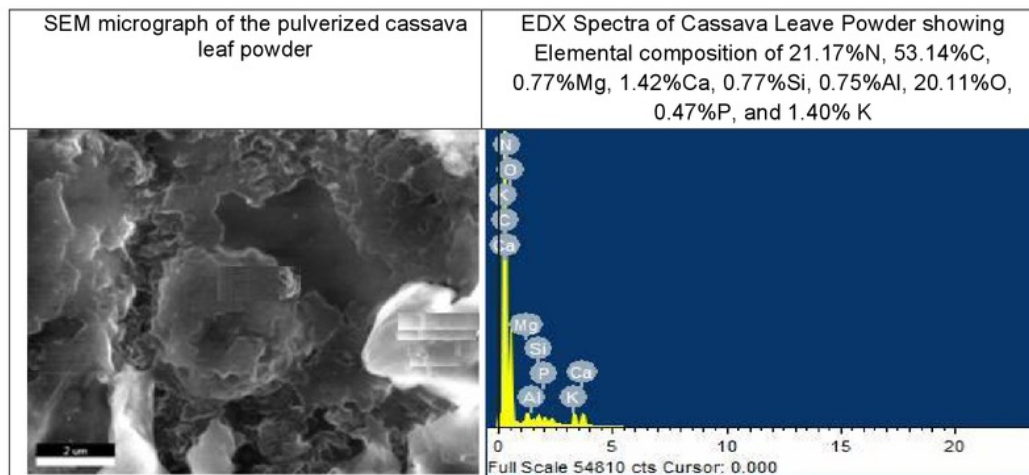


Figure 3: SEM and EDX of the cassava leaf powder

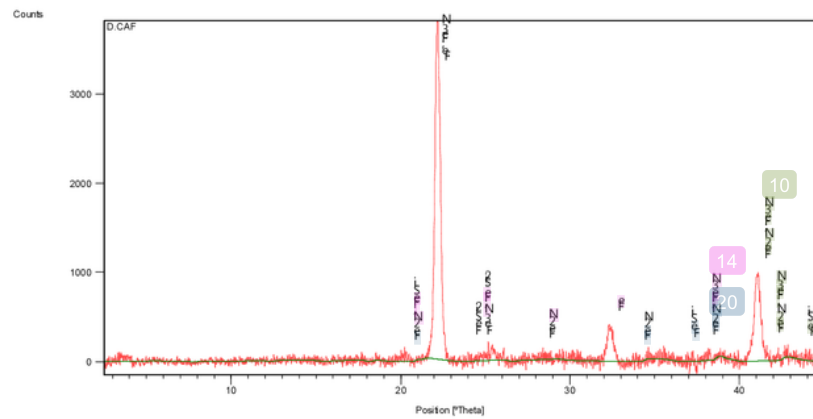

a

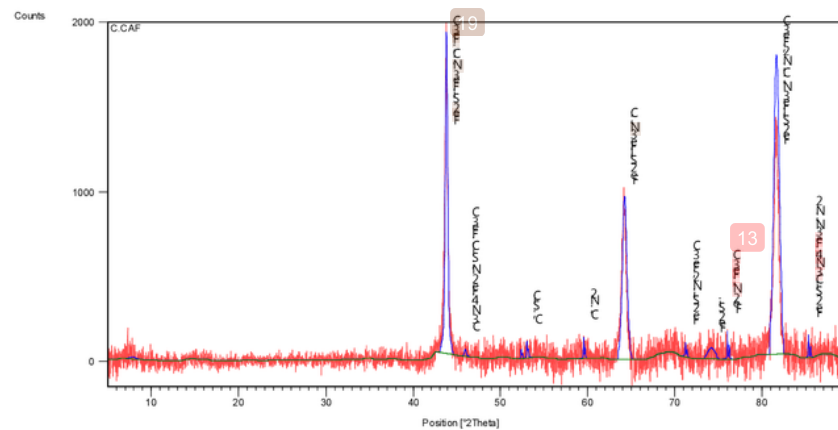

b

Figure 4: XRD Results of the cyanided samples of Ductile Iron samples showing compound of nitrides in (a) and compound of carbides and nitrides in (b)

Table 4: EDX Analysis of the cyanided heat treated surface (case) samples (A, B, C, D, and E)

Element Symbol	control	750 °C	800 °C	850 °C	900 °C	Error
Fe	92.6	92.5	92.5	92.5	92.5	91.28-94.10
Si	2.7	2.6	2.6	2.7	2.7	2.25-3.00
C	3.4	3.52	3.49	3.5	3.45	3.50-3.90
S	0.02	0.02	0.02	0.02	0.01	0.025-0.15
Cr	0.03	0.03	0.03	0.03	0.02	

N	0	0.98	0.92	1.1	0.94	<0.02-1.20
Mg	0.03	0.02	0.02	0.02	0.02	-
P	0.03	0.02	0.01	0.01	0.01	0.01 - 0.23
Ni	0.03	0.02	0.02	0.02	0.02	0.02 - 2.50
Mn	0.26	0.25	0.24	0.1	0.21	0.15-0.35

3.2 Light microscopy

The microstructures of pack cyanided samples were studied using the Olympus BH-2 microscope with a digital camera. In preparing the specimens for microstructural studies, rough polishing was carried out on 240, 320, 400, and 600, 800 and 1200 SiC grit papers while final polishing was accomplished with alumina pastes of 1µm, and 0.5µm, respectively, etched with 2% nital and thereafter observed with the microscope.

Figure 5, plate 1 reveals a microstructure of graphite nodules in a pearlitic matrix. In Plate 2, a visible diffusion zone was identified revealing a visually dark portion around the circumference of the sample heat treated at 750 °C with holding time of 3hrs. This zone represents a region of elemental diffusion on the sub-surface to form a case; where the darker morphology of the diffusion zone increases in intensity as the holding time increases. Over the temperature range of 750 — 900 °C, the treated specimens show a case formation containing a thin compound layer (CL) with a diffusion zone (DZ) underneath. The progressive changes in the diffusion zone are ascribed to good wear resistance of ductile iron (Zaidoa, 2013). In plates 2 and 3, the effect of cassava cyanidation is similar to the carbonitriding process involving the diffusion of Carbon (C) and Nitrogen (N) on the surface of the specimen simultaneously (Wang *et al.*, 2015).


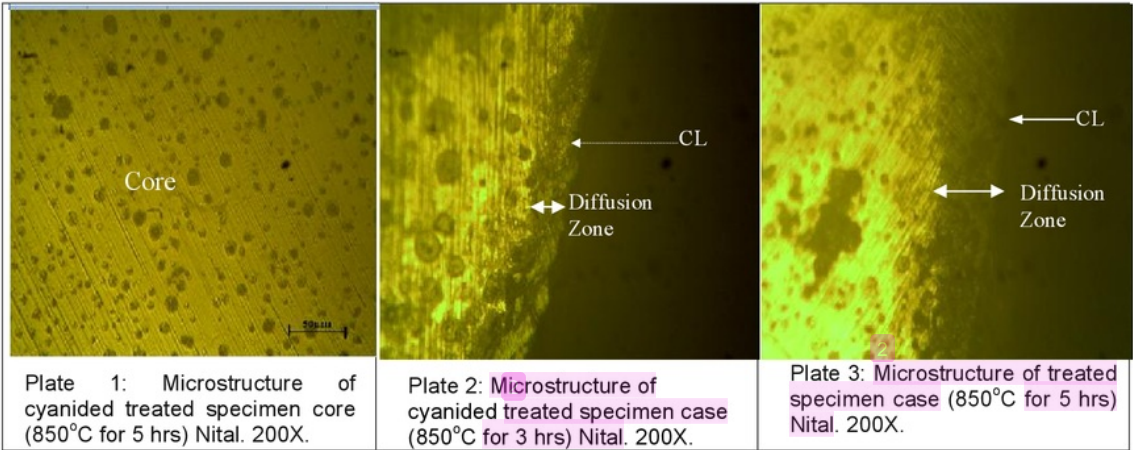



Figure 5: The microstructures of cassava leaves heat treated samples at 850°C. 200X

3.3 SEM Observation

The micrographs of the cyanided samples were studied using Scanning Electron Microscopy. Results obtained after heat treatments revealed a thin hard case with a high compressive residual stress at the surface and from the surface inward, the developed case comprises of a compound layer and a diffusion zone (DZ) in table 5. During the heat treatment process, the diffusion of carbon and nitrogen produced precipitates of carbide (FeC_3) and nitrides ($\epsilon\text{-Fe}_2\text{N}$ and $\gamma'\text{-Fe}_4\text{N}$) within the matrix of the sample as illustrated in figure 4. The microstructure of the core reveals a predominantly pearlite in a ferritic phase while the cases reveals a combination of carbides, nitrides and an appreciable amount of cementite at the circumference of the sample.

Table 5: Table showing the correlation between Hardness profiles against SEM micrographs

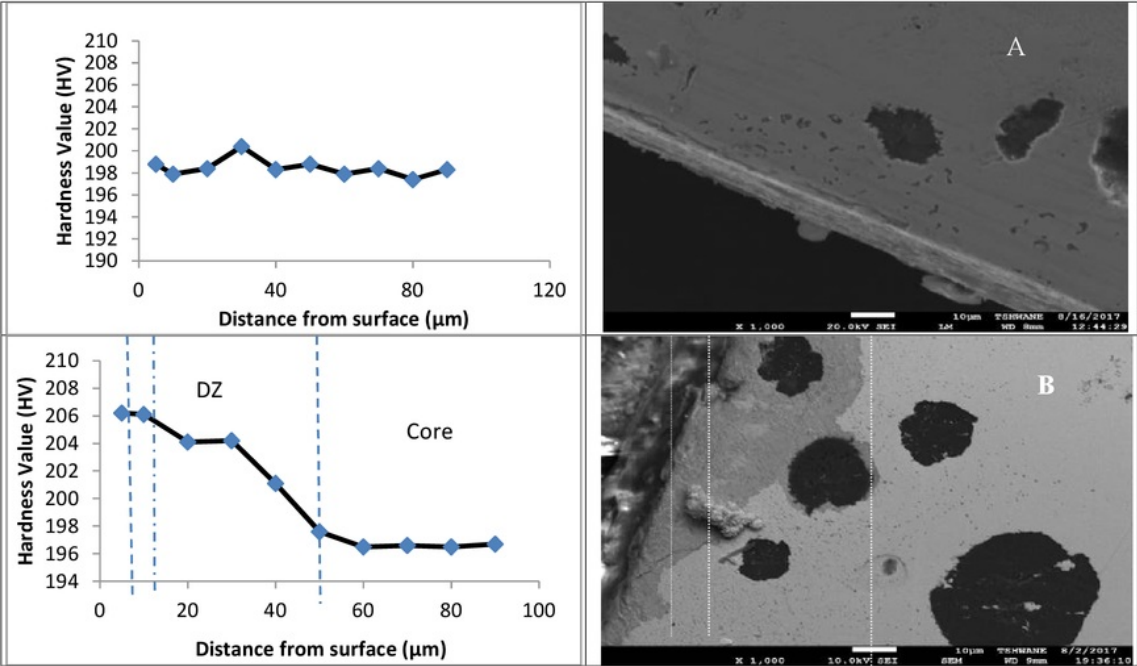

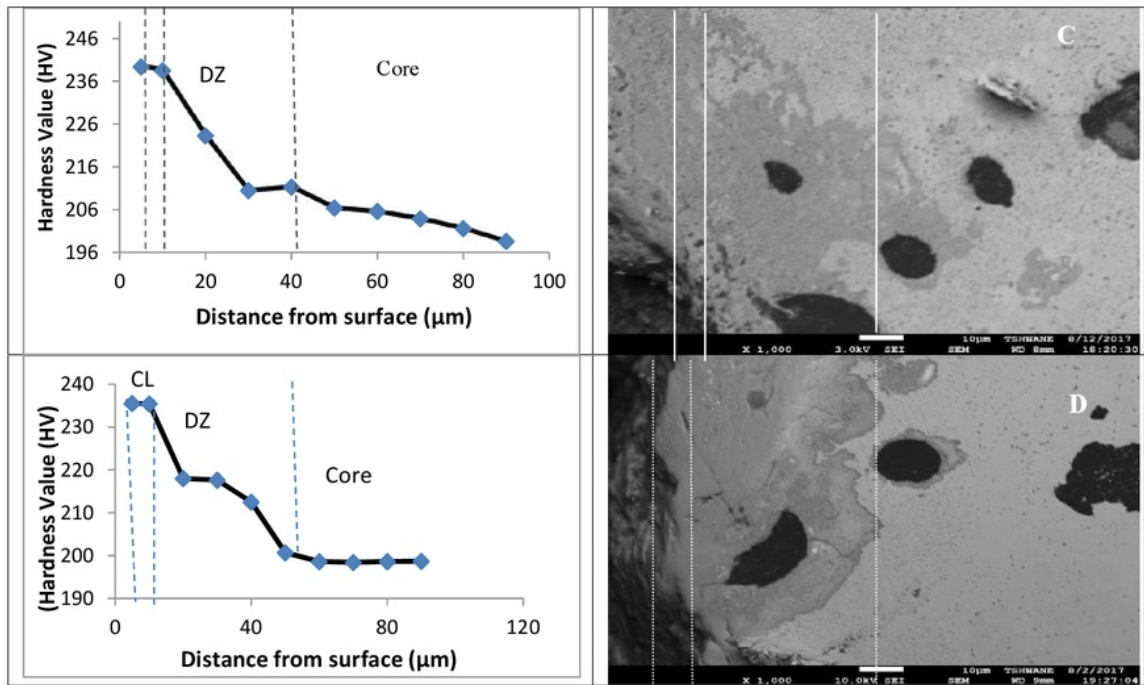

146

147 3.4 Compound layer thickness and diffusion zone depth

148 The compound layer thicknesses and diffusion zone depths of ductile iron were determined using the
 149 cross-sectional of the SEM micrographs presented in table 5. Figure 5a shows the relation between
 150 the compound layer thickness and the diffusion zone depth respectively.

151 Figure 5a reveals a progressive increase in the compound layer thickness of sample treated at
 152 750°C with holding time of 3hrs to a thickness value of 9.2 μm. The sample pack cyanided at 850°C
 153 with holding time of 5hrs has the highest compound layer value of 9.4 μm. This is expected due to the
 154 presence of carbides and appreciable amounts of ε-nitride, γ'-nitride in figure 4, at the case (Table 5,
 155 sample C). At 900°C the compound layer thickness decreases owing to decrease in nitrogen
 156 diffusivity at high temperature.

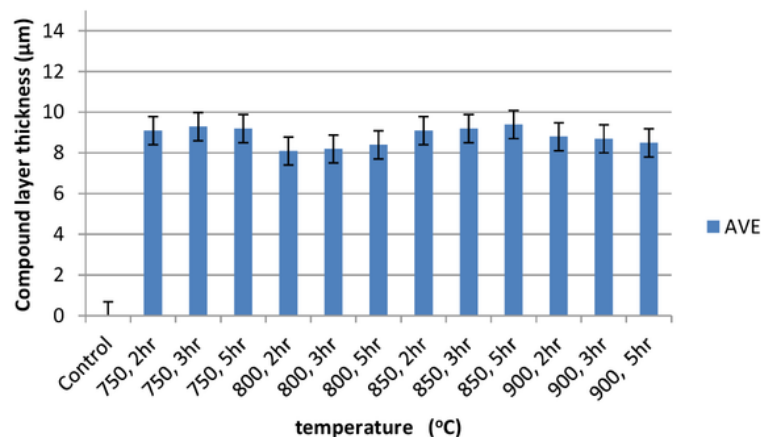


Figure 5a: Compound layer thickness and diffusion zone depth of the treated samples

3.5 Hardness Test Result

The hardness results illustrated in Table 5 show the hardness value of 198.4 HV at the case and 197.2 HV at the core obtained in sample A (as-cast), sample B (750 °C held for 3hrs) reveals a hardness value of 207 HV at the case and 198 HV at the core while a hardness value of 242.6 HV was observed at the circumference (case) of sample C (850°C held for 5 hrs) and a decrease to hardness value of 223HV at the case of sample D (900°C). The increase in hardness is as a result of the presence of ϵ -nitrides at the compound layer (CL) consisting of Fe_2N and Fe_4N in figure 4 with an average value of 198.4 HV at the core for the treated PCCL samples (b, c, and d) respectively, This may be expected because at temperatures above the eutectic temperature, the ferrite iron will transform to austenite which encourages an appreciable diffusion of carbon (C) and a little nitrogen (N) simultaneously into the matrix of the iron, depleting the 'dark' case structure and hence increasing the hardness. At temperatures above the A_{CM} line, the degree of C diffusion is much higher than that of N; this is because carbon has high diffusivity at high temperature than nitrogen (Akinluwade *et al.*, 2013; Ampaw *et al.*, 2016). Thus, the optimum treatment condition experienced in this process was observed in the treated PCCL at a temperature of 850°C held for 5 hours (sample C) and at the boundaries of the sectioned specimen the increase in the hardness was due to the presence of carbides, significant nitrides and retained austenite within the matrix.

179 **4.0 Conclusion**

180 The cassava pack cyaniding method inturn shows an increase in the hardness values of ductile cast
181 iron as a result of the intersiatial diffuction of carbon as carbides (Fe_3C), retained Austenite and
182 nitrogen as nitrides (Fe_4N , Fe_2N , and Fe_3N) at the surface of sample,this phenomenal indicate a
183 potential use of cassava leaves for cast iron strengthening. Thus, harnessing cassava for food and
184 as well as in cast iron strengthening production.

185

186 **References**

- 187 Akinluwade K J., Adetunji A. R., Adeoye M, Umoru L. E., Taiwo A. T., Kalu P., Rominiyi A., Isadare D.
188 A., Soboyejo W., and Adewoye O. O. Light and Electron Microscopy Studies of the Visible
189 Diffusion Zone of Mild Steel Pack Cyanided in Processed Cassava Leaves', Journal of Materials
190 Science and Engineering B 3, 2013; (9); 567-570
- 191 Ampaw E. K., Arthur E. K., Adewoye, O. O., Adetunji A. R., Olusunle S. O. O. and Soboyejo W. O.,
192 Carbonitriding "Pack cyaniding" Ductile Irons', Advanced Materials Research, 2016 ;1132; 330-
193 348
- 194 Callister (Jr.) W. D., Cast irons, Materials Science and Engineering; An Introduction, 7th ed., John
195 Wiley and Sons Inc., New York. 2007; 366-377,
- 196 Falade, K. O. and Akingbala, J. O.Utilization of cassava food', Food reviews international, 2011; 27;
197 51-58.
- 198 Famurewa, J. A. V. and Emuekele, P.O. Cyanide reduction pattern of cassava (manihot Esculenta)
199 as affected by variety and air velocity using fluidized bed dryer. Afr. J. Food Sci. Technol. 2014;
200 5(3):75-80
- 201 Gulzar A., Akhter J. I., Ahmad M., Ali G., Mahmood M., Ajmal M., Microstructure evolution during
202 surface alloying of ductile iron and austempered ductile iron by electron beam melting' Applied
203 Surface Science. 2009; 255:8527-32.
- 204 Imasogie, B. I, Afonja, A. A and Ali, J. A. Properties of Ductile Cast Iron Nodularised with a Multiple
205 Calcium-Magnesium Based Master Alloy', Materials Science and Technology. 2000 ;16(2)194-
206 201.
- 207 Imasogie, B. I. and Afonja, A. A., Effect of Austempering on the Microstructure and Impact Toughness
208 of Ductile Iron, Materials Engineering, 2003;14(3); 251-259.
- 209 Imasogie, B. I. and Afonja, A. A., Effect of Austempering on the Microstructure and Impact Toughness
210 of Ductile Iron, Materials Engineering, 2003; 14(3); 251-259.

- 211 Imasogie, B. I., Ali, J. A., Afonja, A. A. Properties of As Cast and Heat Treated Nodular Graphite Cast
212 Irons Melts Treated with CaSi-CaF₂ Alloy. Scandinavian Journal of Metallurgy, 2001; 30(2); 91-
213 102.
- 214 Komolafe E. A., Arawande A. O. Quality characteristics of garri produced in some selected cassava
215 processing centers in Owo, Ondo State, Nigeria. Journal of Research in National Development.
216 2010; 8(1).
- 217 Mburu F. W., Swaleh S., Njue W. Potential toxic levels of cyanide in cassava (Manihot esculenta
218 Crantz) grown in Kenya'. African Journal of Food Science. 2012; 6 (16):416 - 420.
- 219 Orjiekwe C. L., Solola A., Iyen E. and Imade S. Determination of cyanogenic glucosides in cassava
220 products sold in Okada, Edo State, Nigeria' African Journal of Food Science, Academic Journals,
221 2013; 7(12);468-472
- 222 Wang J, Lin Y. H., Yan J. Zen Zhang Q., Huang R. B., Fan H. Y. Influence of Time on the
223 microstructure of AISI 321 austenitic Stainless steel in salt bath nitriding. Surface and Coatings
224 Technology. 2012; 206; 3399-404
- 225 Zaidao Yang The use of Nitriding to enhance wear resistance of cast iron and 4140 steel' Electronic
226 Theses and Dissertation, <https://scholar.uwindsor.ca/etd/4717>. 2013.

CASSAVA

ORIGINALITY REPORT

21%

SIMILARITY INDEX

10%

INTERNET SOURCES

16%

PUBLICATIONS

6%

STUDENT PAPERS

PRIMARY SOURCES

1

scholar.uwindsor.ca

Internet Source

4%

2

Adelana Rasak Adetunji. "Metallographic Studies of Pack Cyanided Mild Steel Using Cassava Leaves", Materials and Manufacturing Processes, 4/2008

Publication

3%

3

Submitted to King Fahd University for Petroleum and Minerals

Student Paper

3%

4

profdoc.um.ac.ir

Internet Source

3%

5

Submitted to Federal University of Technology

Student Paper

1%

6

Arthur, E.K., E. Ampaw, K.J. Akinluwade, A.R. Adetunji, O.O. Adewoye, and Winston O. Soboyejo. "Carbon and Nitrogen Concentration Profiles of Cassava-Pack Carbonitrided Steel: Model and Experiment", Advanced Materials Research, 2015.

1%

- | | | |
|----|---|-----|
| 7 | Akinluwade, K. J., A. R. Adetunji, M. O. Adeoye, L. E. Umoru, P. N. Kalu, A. T. Taiwo, and O. O. Adewoye. "Development of an Environmentally Friendly in-situ Pack-Cyaniding Technique", Journal of Minerals and Materials Characterization and Engineering, 2012.
Publication | 1% |
| 8 | interesjournals.org
Internet Source | 1% |
| 9 | Abboud, J.H.. "Microstructure and erosion characteristic of nodular cast iron surface modified by tungsten inert gas", Materials and Design, 201203
Publication | <1% |
| 10 | Submitted to Staples High School
Student Paper | <1% |
| 11 | Arabi Jeshvaghani, R., M. Jaberzadeh, H. Zohdi, and M. Shamanian. "Microstructural study and wear behavior of ductile iron surface alloyed by Inconel 617", Materials & Design, 2014.
Publication | <1% |
| 12 | CL, Orjiekwe. "Determination of cyanogenic glucosides in cassava products sold in Okada, Edo State, Nigeria", African Journal of Food | <1% |

13

gonzaga406.weebly.com

Internet Source

<1 %

14

web.sungshin.ac.kr

Internet Source

<1 %

15

M. Ebrahimi, M. Heydarzadeh Sohi, A. Honarbakhsh Raouf, F. Mahboubi. "Effect of plasma nitriding temperature on the corrosion behavior of AISI 4140 steel before and after oxidation", Surface and Coatings Technology, 2010

Publication

<1 %

16

Loreto Atieno Oduor, Willis Owino, Elijah M. Ateka, Jane Ambuko. "Effect of Surface Coatings on the Shelf life and Quality of Cassava", Journal of Food Research, 2017

Publication

<1 %

17

Arthur, E. K., E. Ampaw, M. G. Zebaze Kana, A. R. Adetunji, O. O. Adewoye, and W. O. Soboyejo. "Surface Hardening of AISI 8620 Steel with Cassava (Manihot spp.) Waste", Waste and Biomass Valorization, 2016.

Publication

<1 %

18

www.ase.uc.edu

Internet Source

<1 %

19

nottingham.ac.uk

Internet Source

<1 %

20

David A. Hennessy. "Slaughterhouse Rules: Animal Uniformity and Regulating for Food Safety in Meat Packing", American Journal of Agricultural Economics, 2005

Publication

<1 %

21

Winiczenko, Radosław. "Effect of friction welding parameters on the tensile strength and microstructural properties of dissimilar AISI 1020-ASTM A536 joints", The International Journal of Advanced Manufacturing Technology, 2015.

Publication

<1 %

22

A.R. Kiani-Rashid, D.V. Edmonds. "Microstructural characteristics of Al-alloyed austempered ductile irons", Journal of Alloys and Compounds, 2009

Publication

<1 %

23

H. R. Erfanian-Naziftoosi. "The Effect of Isothermal Heat Treatment Time on the Microstructure and Properties of 2.11% Al Austempered Ductile Iron", Journal of Materials Engineering and Performance, 11/30/2011

Publication

<1 %

Exclude quotes On

Exclude matches Off

Exclude bibliography On