

Original Research Article

MHD mixed convection flow of a nanofluid over a nonlinear stretching sheet with variable Brownian and thermophoretic diffusion coefficient

Abstract:

Investigation has been carried out to analyze the effects of variable wall temperature and concentration on MHD mixed convection flow of a nanofluid over a nonlinear stretching sheet with variable Brownian and thermophoretic diffusion coefficient. The governing differential equations were transformed into a set of non-linear coupled ordinary differential equations using similarity transformations. Results are shown graphically for the velocity profile, the temperature profile, and the concentration profile with different values of physical parameters like suction parameter, magnetic parameter, Grashof number, local modified Grashof number, thermal diffusivity, Prandtl number, Lewis number, the thermophoresis parameter and the Brownian motion parameter, the variable thermophoretic diffusion coefficient parameter and the variable Brownian motion diffusion coefficient parameter. A comparison with previously published work has been carried out and the results are found to be in good agreement. Finally, numerical values of pertinent physical quantities, such as the local Nusselt and local Sherwood numbers were presented graphically.

Keywords: Mixed convection; MHD; Brownian motion; Thermophoresis; Nonlinear Stretching parameter

Introduction:

In fluid dynamics the effects of external magnetic field on magnetohydrodynamic (MHD) flow over a stretching sheet are very important due to its applications in many engineering problems, such as glass manufacturing, geophysics, paper production, and purification of crude oil. A broad effort has been made to gain information regarding the stretching flow problems in various situations. The flow due to stretching of a flat surface was first investigated by Crane [1]. The effect of external magnetic field on the MHD flow over a stretching sheet was investigated by Pavlov [2]. The MHD flow and heat transfer over a stretching sheet with variable fluid viscosity has been discussed by Mukhopadhyay [3]. An excellent collection of articles on this topic can be found in [4-7]. Furthermore, many vital properties of MHD flow over stretching sheet were explored in various articles [8–10] in the literature. Several important investigations on the flow due to stretching/shrinking sheet are available in the literature [11–12]

All the above mentioned investigations deal with the flows over a linear stretching sheet. Cortell [13, 14] has worked on viscous flow and heat transfer over a nonlinearly stretching sheet. Awang and Hashim [15] obtained the series solution for flow over a nonlinearly stretching sheet with chemical reaction and magnetic field. The flow and heat transfer characteristics in a viscous fluid over a nonlinearly stretching sheet without heat dissipation effect was studied by Vajravelu [16]. The boundary layer flow of a nanofluid flow over a

non-linearly stretching sheet was later studied by Rana and Bhargava [17]. The analytical solution of the boundary layer flow of an incompressible viscous fluid over a non-linear stretching sheet has been investigated by Hayat [18]. Approximate Solution of the Magneto-Hydrodynamic flow over a nonlinear stretching sheet has been studied by Eerdunbuhe and Temuerchaolu [19]. An excellent collection of articles on this topic can be found in [20-22].

Nanofluids are the suspension of nanometer-sized solid particles and fibers, which have been proposed as a means for enhancing the performance of heat transfer liquids currently available, such as water, toluene, oil and ethylene glycol mixture. Choi [23], was the first person who utilizes nanofluid. Choi et al. [24] affirmed that the addition of a one percent by volume of nanoparticles to usual fluids increases the thermal conductivity of the fluid up to approximately two times. Recently several modeling of the natural or mixed convection of nanofluids have been investigated numerically. The pioneer work on the boundary layer flow of a nanofluid over a stretching sheet has been carried out by Khan and Pop [25] using Buongiorno's model [26], in his theory he explained that nanofluids have higher thermal conductivity compare to the base fluids. Some other recent articles describing the properties of nanofluid are cited in Refs.[27–31].

Mixed convection (or combined convection), one of the transport phenomena, is the composition of both natural and forced convection flow. These flow patterns are discovered simultaneously by both an external forcing mechanism and internal volumetric forces. Prasad et al. [32] analyzed the mixed convection heat transfer over a non-linear stretching surface with variable fluid properties. The mixed convection flow of a non-newtonian nanofluid over a non-linearly stretching sheet was discussed by Gorla and Kumari [33]. Mustafa and Hayat [34] studied unsteady boundary layer flow of a casson fluid due to an impulsively started moving flat plate. The Keller-Box method introduced by Keller [35] is one of the best numerical method basically it's a mixed finite volume method which consists in taking the average of a conservation law and of the associated constitutive law at the level of the same mesh cell. Sarif [36] obtained the numerical solution of the steady boundary layer flow and heat transfer over a stretching sheet with Newtonian heating by using Keller box method.

Motivated by all the articles reviewed above, and in particular, for more physical implications, this present investigation deals with the mixed convection flow of a nanofluid over a nonlinear stretching sheet with variable Brownian and thermophoretic diffusion coefficient by considering the effects of variable wall temperature and concentration. The basic governing equations are converted into ordinary differential equations by applying suitable similarity transformations and those equations were solved numerically by using finite difference method called as the Keller box method.

Mathematical Formulation:

We consider the two-dimensional steady laminar MHD mixed convective flow of a nanofluid due to a stretching sheet situated at $y = 0$ with stretching velocity $u = C_1 x^n$, where

C_1 is a constant and n is non linear stretching parameter. The fluid is electrically conducted due to an applied magnetic field $B(x)$ normal to the stretching sheet. The magnetic Reynolds number is assumed small and so the induced magnetic field can be considered to be negligible. The wall temperature T_w and the nanoparticle fraction C_w are assumed constant at the stretching surface. When y tends to infinity, ambient temperature and concentration are T_∞ and C_∞ , respectively. It is chosen that the coordinate system x -axis is along stretching sheet and y -axis is normal to the sheet.

The continuity, momentum, energy and concentration equations of incompressible nanofluid boundary layer flow are as follows:

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0 \quad (1)$$

$$u \frac{\partial u}{\partial x} + v \frac{\partial v}{\partial y} = \nu \frac{\partial^2 u}{\partial y^2} + g\beta_T(T - T_\infty) + g\beta_C(C - C_\infty) - \frac{\sigma B^2(x)}{\rho} u \quad (2)$$

$$u \frac{\partial T}{\partial x} + v \frac{\partial T}{\partial y} = \alpha \frac{\partial^2 T}{\partial y^2} + \tau \left\{ D_B(C) \frac{\partial C}{\partial y} \frac{\partial T}{\partial y} + \frac{D_T(T)}{T_\infty} \left(\frac{\partial T}{\partial y} \right)^2 \right\} \quad (3)$$

$$u \frac{\partial C}{\partial x} + v \frac{\partial C}{\partial y} = D_B(C) \frac{\partial^2 C}{\partial y^2} + \frac{D_T(T)}{T_\infty} \left(\frac{\partial^2 T}{\partial y^2} \right) \quad (4)$$

Boundary conditions are

$$u(x, 0) = U(x) = C_1 x^n, v(x, 0) = V_w(x) = C_2 x^m, T(x, 0) = T_\infty + C_3 x^r, C(x, 0) = C_\infty + C_4 x^r$$

$$\text{And } u(x, \infty) = 0, T(x, \infty) = T_\infty, C(x, \infty) = C_\infty \quad (5)$$

Where u, v are the velocity components along the x and y directions, respectively. T and C are the fluid temperature and concentration, respectively. ρ is the fluid density, g is the acceleration due to gravity, β_T is the coefficient of thermal expansion, β_C is the coefficient of expansion with concentration, C_1, C_2, C_3, C_4 are the constants, $U(x) = C_1 x^n$ is the stretching velocity of the plate, $V_w(x) = C_2 x^m$ is the transverse velocity at the surface, $B(x) = B_0 x^s$ is the applied magnetic field, where $s = \frac{n-1}{2}$, $m = \frac{n-1}{2}$, $r = 2n-1$, The stretching surface has a uniform temperature T_w and the free stream temperature is T_∞ with $T_w > T_\infty$. Also, it has a uniform concentration C_w and the free stream concentration is C_∞ with $C_w > C_\infty$.

In this study, $D_T(T)$ and $D_B(C)$ are the variable thermophoretic and Brownian motion diffusion coefficients, and assumed to vary linearly with temperature and volume fraction of the nanoparticles, respectively. We define them as:

$$D_T(T) = D_{T_\infty} \left(1 + \frac{\varepsilon}{\Delta T} (T - T_\infty) \right),$$

$$D_B(C) = D_{B_\infty} \left(1 + \frac{\beta}{\Delta C} (C - C_\infty) \right). \quad (6)$$

Where $\Delta T = (T_w - T_\infty)$, $\Delta C = (C_w - C_\infty)$, T_w the surface temperature, C_w the surface volume fraction of the nanoparticles, ε the variable thermophoretic diffusion coefficient parameter, β Brownian motion diffusion coefficient parameter, D_{T_∞} and D_{B_∞} are

thermophoretic and Brawnian motion diffusion coefficients of the nanofluid far away from the sheet, respectively.

The stream function $\psi(x, y)$ is defined by $u = \frac{\partial\psi}{\partial y}$ and $v = -\frac{\partial\psi}{\partial x}$, such that the continuity Eq.(1) is satisfied automatically. With the help of following similarity transformations, the non linear partial differential equations (2), (3) and (4) were transformed into coupled non linear ordinary differential equations satisfied

$$\eta = y\sqrt{\frac{(n+1)U(x)}{2}\frac{\partial x}{\partial x}}, \psi = \sqrt{\frac{2}{(n+1)}}\vartheta xU(x)f(\eta), \theta(\eta) = \frac{T-T_\infty}{T_W-T_\infty}, \phi(\eta) = \frac{C-C_\infty}{C_W-C_\infty} \quad (7)$$

The transformed ordinary differential equations are

$$f''' + ff'' - \frac{2}{(n+1)}[nf'^2 + Mf' - Gr\theta - Gc\phi] = 0 \quad (8)$$

$$\frac{1}{Pr}\theta'' + Nb(1 + \beta\phi)\phi'\theta' + Nt(1 + \varepsilon\theta)\theta'^2 + f\theta' - \frac{2(2n-1)}{(n+1)}f'\theta = 0 \quad (9)$$

$$\frac{1}{Le}\left((1 + \beta\phi)\phi'' + (1 + \varepsilon\theta)\frac{Nt}{Nb}\theta''\right) - \frac{2(2n-1)}{(n+1)}f'\phi + f\phi' = 0 \quad (10)$$

And the boundary conditions are transformed into

$$f(0) = S, f'(0) = 1, g(0) = 1, h(0) = 1$$

$$\text{and } f'(\infty) = 0, g(\infty) = 0, h(\infty) = 0$$

Where the prime denotes differentiation with respect to η and the parameters are given by:

$$S = -c_2\sqrt{\frac{2}{(n+1)\vartheta c_1}}, M = \frac{\sigma\beta_0^2}{\rho c_1}, Gr = \frac{g\beta_T(T_W-T_\infty)}{c_1^2x^{2n-1}}, Gc = \frac{g\beta_C(C_W-C_\infty)}{c_1^2x^{2n-1}},$$

$$Pr = \frac{\vartheta}{\alpha}, \alpha = \frac{k}{\rho c_p}, Le = \frac{\vartheta}{D_{B_\infty}}, Nt = \frac{(\rho c)_p D_{T_\infty}(T_W-T_\infty)}{(\rho c)_f T_\infty \vartheta}, Nb = \frac{(\rho c)_p D_{B_\infty}(C_W-C_\infty)}{(\rho c)_f \vartheta}. \quad (12)$$

Here, S, M, Gr, Gc, Pr, α , Le, Nt and Nb, denote the suction parameter, magnetic parameter, Grashof number, local modified Grashof number, Prandtl number, thermal diffusivity, Lewis number, the thermophoresis parameter and the Brownian motion parameter, respectively.

And the physical quantities of the local Nusselt number Nu_x and the local Sherwood number Sh_x are defined as:

$$Nu_x = \frac{xq_w}{k(T_W-T_\infty)} \text{ and } Sh_x = \frac{xq_m}{D_B(C_W-C_\infty)} \quad (13)$$

Where q_w and q_m are the wall heat and mass fluxes, respectively, and are given by

$$q_w = -k\left(\frac{\partial T}{\partial y}\right)_{y=0} \text{ and } q_m = -D_B\left(\frac{\partial C}{\partial y}\right)_{y=0} \quad (14)$$

Now equation (12) becomes

$$\frac{Nu_x}{\sqrt{Re_x}} = -\theta'(0) \text{ and } \frac{Sh_x}{\sqrt{Re_x}} = -\phi'(0) \quad (15)$$

Where $Re_x = \frac{u_w x}{\nu}$ is the Reynolds number.

Results and Discussion:

The non-linear ordinary differential equations Eqs. (8) – (10) with the boundary conditions (11) were solved numerically by Keller Box method. The computation have been carried out for different values of governing parameters viz. suction parameter S, magnetic parameter M, Grashof number Gr, local modified Grashof number Gc, Prandtl number Pr, Lewis number Le, the thermophoresis parameter Nt and the Brownian motion parameter Nb, ϵ the variable thermophoretic diffusion coefficient parameter and β Brownian motion diffusion coefficient parameter. The velocity, temperature and concentration profiles for different governing parameters has also been examined for both values of non linear stretching parameters $n=1, n=10$. The results obtained in the study are compared with the existing literature and found in good agreement which is presented in the Table 1.

Table1: Comparison of Nusselt and Sherwood numbers when $Pr = Le = 2$ and $M = Gr = Gc = S = \epsilon = \beta = 0$

N	Nt	Nb	Rana and Bhargava [17]		Present Result	
			$-\theta'(0)$	$-\phi'(0)$	$-\theta'(0)$	$-\phi'(0)$
0.2	0.1	0.5	0.516	0.9012	0.5161	0.9014
	0.3		0.4533	0.8395	0.4536	0.8386
	0.5		0.3999	0.8048	0.3998	0.8039
3	0.1		0.4864	0.8445	0.4766	0.8447
	0.3		0.4282	0.7785	0.4279	0.7785
	0.5		0.3786	0.7379	0.3782	0.7378
10	0.1		0.4799	0.8323	0.4799	0.8322
	0.3		0.4227	0.7654	0.4228	0.7654
	0.5		0.3739	0.7238	0.3739	0.7232

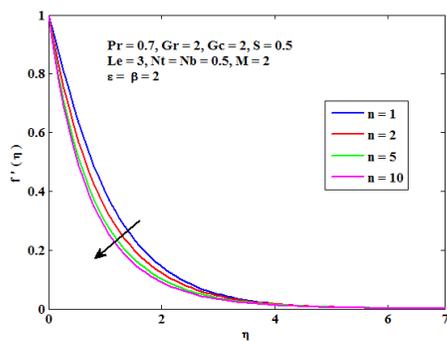


Fig 1 : Velocity profile with variation in nonlinear stretching parameter

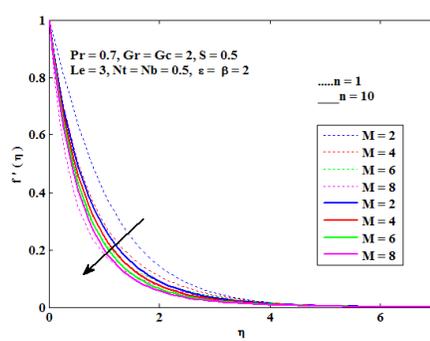


Fig 2 : Velocity profile with variation in M

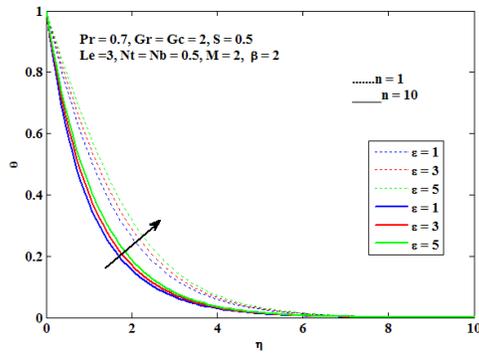


Fig 3 : Temperature profile with variation in variable Thermoporetic diffusion coefficient ϵ

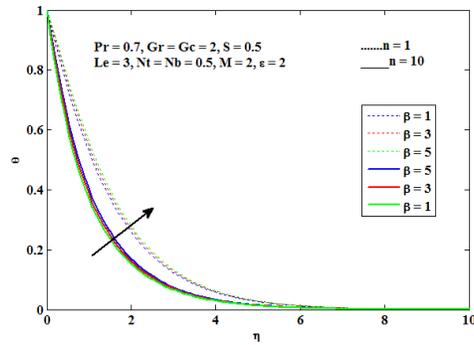


Fig 4 : temperature profile with variation in variable Brownian motion diffusion coefficient β

The nature of velocity profile with variations in nonlinearly stretching parameter n and magnetic parameter has been displayed in figures 1 and 2. The velocity of the fluid is found to decrease with an increase in n . But the decrease of the velocity profile is negligible for large values of n since the coefficient $\frac{2n}{n+1}$ approaches to 2 when $n \rightarrow \infty$. Figure 2 shows the effect of magnetic parameter for nonlinear stretching parameters $n=1$, $n=10$. It can be observed that when the magnetic parameter M increases the velocity decreases this is because the transverse magnetic field creates the Lorentz force. It is a resistive force similar to the drag force which will result in the deceleration of the flow.

The effect of variable Thermoporetic diffusion coefficient parameter ϵ and variable Brownian motion diffusion coefficient parameter β on temperature of the nanofluid are displaced in figure 3 and figure 4. It is observed from the figures that increasing both the parameters can also increase the temperature of the fluid by keeping other parameters fixed. In this regard, temperature of the fluid is higher in injection situation than that of suction as it is revealed by the figures.

Figure 5 shows the effect of velocity profile with respect to the variation in suction parameter S . It can be noticed that when the values of ‘ S ’ increase, the velocity profile graph decreases. Fig 6 reveals the effect of Grashoff number Gr on temperature profile, it is observed that temperature slightly decreases with increasing values of local Grashoff number Gr . Fig 7 presents the effect of Lewis number on dimensionless nanoparticle concentration. An increase in Lewis values will reduce the profile of nanoparticle concentration and larger Le values will also suppress concentration profile. Fig 8 shows the influence of Brownian motion parameter on temperature profile. It clearly indicates that the thermal boundary layer thickness increases with an increase in Brownian motion parameter Nb .

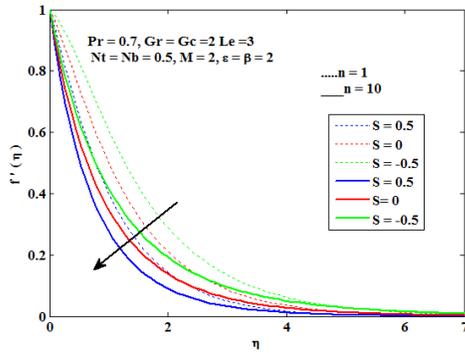


Fig 5 : Velocity profile with variation in Suction parameter S

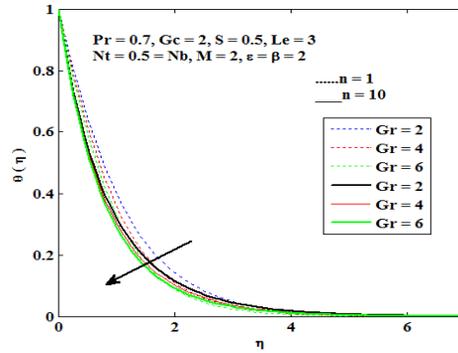


Fig 6 : Temperature profile with variation in Gr

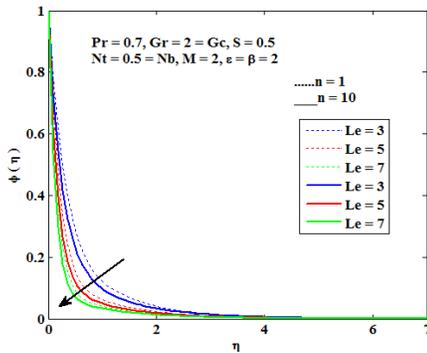


Fig 7: Concentration profile with variation In Lewis number Le

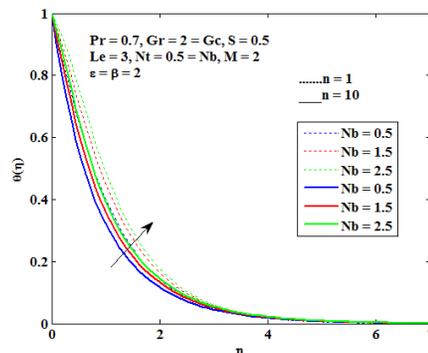


Fig 8: Temperature profile with variation in Brownian motion parameter

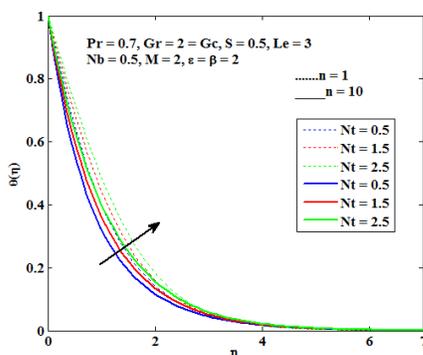


Fig 9: Temperature profile with variation Nt

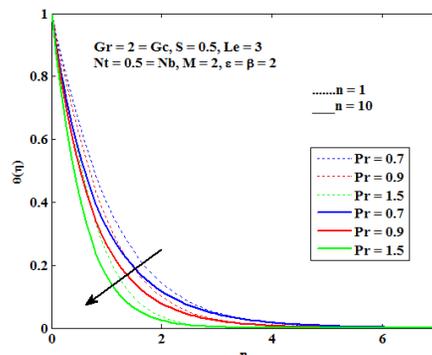


Fig 10: Temperature profile with variation in Pr

Figure 9 shows the influence of thermoporesis parameter Nt on nanoparticle concentration. From the figure it is clear that nanoparticle concentration increases with increasing values of thermoporetic parameter Nt . The effect of Prandtl number Pr on the heat transfer process is shown by the Fig. 10. This graph reveals that an increase in Prandtl number Pr results in a

decrease in the temperature distribution, because, thermal boundary layer thickness decreases with an increase in Prandtl number Pr.

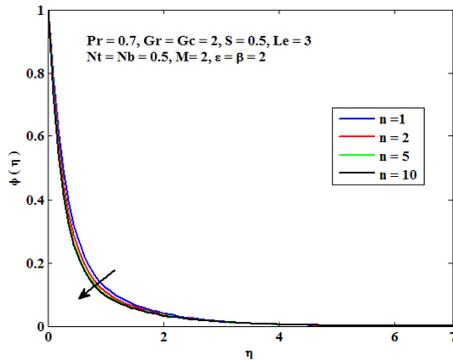


Fig11: Concentration profile with variation in Non linear stretching parameter n

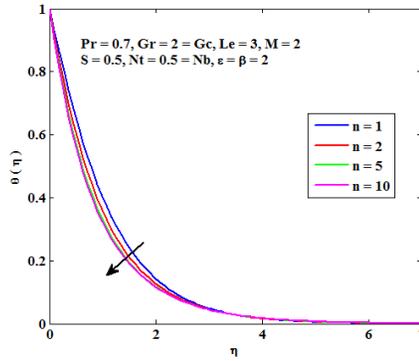


Fig 12: Temperature profile with variation in nonlinear stretching parameter n

Fig 11 depicts the nature of nanoparticle volume fraction with variation in nonlinearly stretching parameter n. It shows that nanoparticle concentration decreases with an increase in n. The nature of temperature profile with variation in non linearly stretching parameter n has been depicted in Fig 10. It can be observed that temperature decreases with an increase in n.

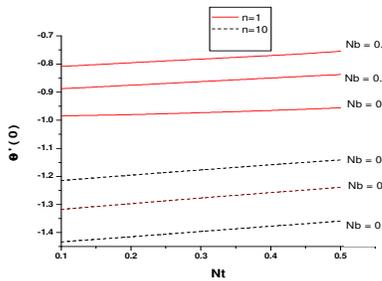


Fig 13: Variation of local Nusselt number $-\theta'(0)$ with Nt for different values of Nb.




Fig 14: Variation of local Sherwood number $-\phi'(0)$ with Nt different values of Nb

Fig 11 shows the influence of both the Brownian motion parameter Nb and thermophoresis parameter Nt on local Nusselt number $-\theta'(0)$. As both parameters increase, the heat transfer rate on the surface of a sheet decreases. This indicates that an increment in thermophoresis parameter induces resistance to the diffusion of mass. This results in the reduction of heat transfer rate on the surface.

Fig 12 depicts the variation of local Sherwood number $-\phi'(0)$ in response to a change in Brownian motion parameter Nb. The graph shows that the local Sherwood number increases as Nb increases and also increases with an increase in Nt.

Conclusion:

Investigation has been carried out numerically to study the effects of Brownian motion and thermophoresis on MHD mixed convection flow of a nanofluid over a nonlinear stretching sheet with variable temperature and concentration. The transformed nonlinear ordinary differential equations are solved by using Keller Box Method. The obtained numerical results are compared with previously published work and they are found to be in excellent agreement. The effects of governing parameters on the flow and heat transfer characteristics are thickness decreases with the effect of magnetic parameter and suction parameter, presented graphically and quantitatively. The main observations of the present study are as follows:

1. Influence of non linear stretching parameter decreases both the velocity of the fluid as well as temperature.
2. The boundary layer thickness is increases with an increase in both variable Thermophoretic diffusion coefficient parameter and variable Brownian motion diffusion coefficient parameter.
3. The velocity of the fluid is decreases with an increase in both Magnetic parameter and Suction parameter.
4. Thermal boundary layer thickness decreases with an increase in both Grashof number and Prandtl number.
5. The thickness of thermal boundary layer increases with an increase in both Brownian motion and thermophoresis parameters.
6. An increase in nanoparticle concentration decreases both the Lewis number and nonlinear stretching parameter.
7. Heat transfer rate decreases with the influence of Brownian motion and thermophoresis parameters.
8. The local Sherwood number increases with the effect of both Brownian motion and thermophoresis parameters.

References:

1. L. J. Crane. Flow past a stretching plate. *Z Angew Math Phys* vol.21, no.4, pp.645–647, 1970.
2. K. B. Pavlov. Magnetohydrodynamic flow of an incompressible viscous fluid caused by the deformation of a plane surface. *Magnetohydrodynamics*, 1974;10:146–148.
3. S. Mukhopadhyay, G. C. Layek, and S. A. Samad. Study of MHD boundary layer flow over a heated stretching sheet with variable viscosity. *International Journal of Heat and Mass Transfer*, 2005; 48(21-22):4460–4466.
4. K. R. Rajagopal, T. Y. Na, and A. S. Gupta. Flow of a viscoelastic fluid over a stretching sheet. *Rheologica Acta*, 1984;23(2): 213–215.
5. W. C. Troy, E. A. Overman, II, G. B. Ermentrout, and J. P. Keener. Uniqueness of flow of a second-order fluid past a stretching sheet. *Quarterly of Applied Mathematics*, 1987; 44(4):753–755.

6. P. S. Gupta, A. S. Gupta. Heat and mass transfer on stretching sheet with suction or blowing. *Can. J. Chem. Eng.* 1977;55:744-746.
7. W.A. Khan, and I. Pop. Boundary layer flow of a nanofluid past a stretching sheet. *International Journal of Heat and Mass Transfer*, 2010;53(5):2477.
8. H. I. Andersson. MHD flow of a viscoelastic fluid past a stretching surface. *Acta Mechanica*, 1992;95(1-4):227-230.
9. S. Abel, N. Mahesha, B. Malipatil. Heat transfer due to MHD slip flow of a second-grade liquid over a stretching sheet through a porous medium with non-uniform heat source/sink. *Chem Eng Commun* 2011;198:191-213.
10. T. Fang, J. Zhang, S. Yao. Slip MHD viscous flow over a stretching sheet – an exact solution. *Commun Non-linear Sci Numer Simul* 2009;14:3731-7.
11. T. Fang, S. Yao, J. Zhang, A. Aziz. Viscous flow over a shrinking sheet with second order slip flow model. *Commun Non-linear Sci Numer Simul* 2010;15:1831-42.
12. K. Bhattacharyya. Effects of radiation and heat source/sink on unsteady MHD boundary layer flow and heat transfer over a shrinking sheet with suction/injection. *Frontiers of Chemical Engineering in China*, 2011;5(3):376-384.
13. R. Cortell. MHD flow and mass transfer of an electrically conducting fluid of second grade in a porous medium over a stretching sheet with chemically reactive species. *chemical Engineering and Processing*, 2007;46(8):721-728.
14. R. Cortell. Viscous flow and heat transfer over a nonlinearly stretching sheet. *Applied Mathematics and Computation*, 2007;184(2):864-873.
15. S. Awang Kechil, I. Hashim. Series Solution of flow over nonlinearly stretching sheet with chemical reaction and magnetic field. *Physics Letters, Section A*.2008;372(13): 2258-2263.
16. K. Vajravelu. Viscous flow over a nonlinearly stretching sheet. *Applied Mathematics and Computation*, 2001;124(3):281-288.
17. P. Rana, R. Bhargava. Flow and heat transfer of a nanofluid over a nonlinearly stretching sheet: a numerical study. *Commun. Nonlinear Sci. Numer. Simul*, 2012; 17: 212-226.
18. T. Hayat, Q. Hussain, T. Javed. The modified decomposition method and pade approximation for the MHD flow over a non-linear stretching sheet. *Nonlinear Anal: Real World Applications*, 2009;10(2):966-973.
19. Eerdunbuhe and Temuerchaolu (2012) Approximate Solution of the Magneto-Hydrodynamic Flow over a Nonlinear Stretching Sheet. *Chinese Physics B*, 21, Article ID: 035201. <http://dx.doi.org/10.1088/1674-1056/21/3/035201>
20. A. Raptis and C. Perdikis. Viscous flow over a non-linearly stretching sheet in the presence of a chemical reaction and magnetic field. *International Journal of Non-Linear Mechanics*, 2006;41(4):527-529.
21. F. M. Hady, F. S. Ibrahim, S. M. Abdel-Gaied and M. R. Eid. Radiation effect on viscous flow of a nanofluid and heat transfer over a nonlinearly stretching sheet. *Nanoscale Res. Lett.* 2012; 7, Article ID 229.
22. Javad Alinejad and Sina Samarbakhsh. Viscous Flow over Nonlinearly Stretching Sheet with Effects of Viscous Dissipation. *Journal of Applied Mathematics*. Volume 2012 (2012), Article ID 587834, 10 pages.

23. S. U. S. Choi. Enhancing Thermal Conductivity of Fluids with Nanoparticles. Proceedings of the ASME International Mechanical Engineering Congress and Exposition, 1995;66:99-105.
24. S. U. S. Choi, Z. G. Zhang, W. Yu, F. E. Lockwood, E. A. Grulke.(2001). Anomalous thermal conductivity enhancement in nanotube suspensions, Appl. Phys. Lett. 79:2252-2254. <http://dx.doi.org/10.1063/1.1408272>.
25. W. A. Khan, and I. Pop. Boundary-Layer Flow of a Nanofluid past a Stretching Sheet. International Journal of Heat and Mass Transfer, 2010;53:2477-2483.
26. J. Buongiorno. Convective Transport in Nanofluids. Journal of Heat Transfer, 2006;128:240-250.
27. W. A. Khan, I. Pop. Boundary-layer flow of a nanofluid past a stretching sheet. Int. J. Heat Mass Transfer, 2010;53:2477-2483.
28. A.J. Chamkha, A.M. Aly. MHD free convection flow of a nanofluid past a vertical plate in the presence of heat generation or absorption effects. Chem. Eng. Commun. 2011;198:425-441.
29. K. Das. Slip flow and convective heat transfer of nanofluids over a permeable stretching surface. Comput. Fluids, 2012;64:34-42.
30. W. Ibrahim and B. Shanker. (2014) Magnetohydrodynamic Boundary Layer Flow and Heat Transfer of a Nano Fluid over Non-Isothermal Stretching Sheet. Journal of Heat Transfer, 136, Article ID: 051701.
31. M. Hassan, M.M. Tabar, H. Nematy, G. Domairry, F. Noori. An analytical solution for boundary layer flow of a nanofluid past a stretching sheet. Int. J. Therm. Sci., 2011;50:2256-2263.
32. K. V. Prasad, K. Vajravelu, P. S. Dattari. Mixed convection heat transfer over a non-linear stretching surface with variable fluid properties. Int. J. Non-linear Mech., 2010;45:320-330.
33. Rama Subba Reddy Gorla and Mahesh Kumari. Mixed Convection Flow of a Non-Newtonian Nanofluid Over a Non-Linearly Stretching Sheet. Journal of Nanofluids, 2012;1:186-195.
34. M. Mustafa, T. Hayat, I. Pop and A. Aziz. Unsteady Boundary Layer Flow of a Casson Fluid Due to an Impulsively Started Moving Flat Plate. Heat Transfer, 2011;40:563-576.
35. H. B. Keller. A New Difference Scheme for Parabolic Problems. In: Hubbard, B., Ed., Numerical Solutions of Partial Differential Equations, Vol. II, Academic Press, New York, PP. 327-350, 1971.
36. N. M. Sarif, M. Z. Salleha, and R. Nazar. Numerical Solution of Flow and Heat Transfer over a Stretching Sheet with Newtonian Heating Using the Keller Box Method. Procedia Engineering, 2013;53:542-554.