

# Modeling of heat transfer in a habitat built in local materials in dry tropical climate

## ABSTRACT

A numerical modeling of heat transfer in a habitat whose walls are in local materials (compressed earth blocks) is presented. The transfer equations based on the nodal method are solved by an implicit finite difference method and the Gauss algorithm coupled to an iterative procedure. It was analyzed the influence of the rate of air exchange, the thickness of the walls and the nature of the materials of which they are composed on the spatio-temporal distributions of the temperature of the air inside the habitat and those of its walls. The results show that the temperature inside habitats whose walls are made of local materials (earthen materials) is lower than that of modern habitats (cement blocks). The increase in the thickness of the walls contributes to a better thermal inertia of the habitat by improving the decrement factor and the time lag difference between the inside and the outside. Also, over-ventilation of a habitat with high inertia has a negative impact on its performance during the hottest periods.

**Keywords:** Thermal inertia, ventilation, time lag, decrement factor, thermal modeling

## Nomenclature


$DFS$	Density of the solar flux absorbed by the material, $W.m^{-2}$
$T_a$	Air temperature, $^{\circ}C$
$T_s$	Temperature of wall surface, $^{\circ}C$
$V$	Volume, $m^3$
$h_c$	Coefficient of heat transfer by convection, $W.m^{-2}.K$
$h_r$	Coefficient of heat transfer by radiation, $W.m^{-2}.K$
$A$	Area, $m^2$
$f$	Reduction factor
$\phi$	Time lag, $h$
$\rho$	Density, $kg / m^3$
$C_p$	Thermal mass capacity, $J.kg^{-1}K^{-1}$
$\alpha$	Absorptivity coefficient
max	maximum
min	minimal
$e$	external
$i$	internal

## 13 1. INTRODUCTION

14

15 The building sector is one of the top three energy consumers in the world, with transportation  
16 and industry [1]. The share of energy consumption in buildings amounts to 40% of world  
17 energy [2] and 50% of this consumption is devoted generally to heating, ventilation and air  
18 conditioning systems [3]. The thermal design of a building influences the thermal  
19 performance of the building, which also affects energy consumption [4]. Reducing energy  
20 consumption in buildings requires a good design of its envelope. The thermal performance of  
21 a building can be improved by acting either on its physical form, its solar protections [5] and  
22 its orientation, or on the composition of the materials of its envelope (improvement of the  
23 thermal inertia). Kabore M. [6] studied the influence of the type of roofing of buildings on their  
24 thermal performance in tropical climate and showed that the use of an insulator with a good  
25 reflection coefficient effectively fights against heat gains at the level of the roof. Ouedraogo I.  
26 [7] realized a numerical study of a bioclimatic roof favoring ventilation to reduce thermal  
27 loads in a habitat in dry tropical climate in Burkina Faso; from this study it appears that a  
28 north-south orientation along the roof and an inclination of 50 ° of the roof improve its  
29 ventilation. It was demonstrated during a numerical study of the characteristics of the  
30 envelope of a typical Malaysian building that the energy consumption of a building oriented  
31 north-south is reduced by 10% compared to that of the same East-West building [5]. It was  
32 demonstrated in a numerical study carried out by Bojic that an external thermal insulation of  
33 building walls contributes to a reduction of around 20% in annual building energy  
34 consumption [8]. J. E. Stéphan highlighted the impact of the thermal inertia of traditional  
35 buildings in summer, and concluded that this inertia was variable depending on where the  
36 building is located and its thermal insulation. A. Gagliano and al. [9] have shown that high  
37 thermal inertia in the building in combination with natural ventilation can reduce overheating  
38 phenomena in the building. In addition, the time lag difference between the temperature of  
39 the outer face and that of the inner face of the wall can be increased by 5 hours when the  
40 orientation of the building passes from west to east. In sub-Saharan Africa, the design of  
41 modern buildings is not always adapted to the climatic context of the area [10]. This results  
42 in excessive energy consumption in the building sector. Modeling and simulation of the  
43 thermal performance of a bioclimatic habitat model in a humid tropical climate showed that  
44 the indoor temperature reached 28.3 ° C. [11].

45 The studies mentioned above show that thermal inertia and ventilation contribute to the  
46 reduction of expenses in air conditioning in buildings for climates where daily variations in  
47 temperature are high [12], [13] such as those of Ouagadougou (figure 1).  
48 The objective of this work is to contribute to the improvement of the thermal performance of  
49 a habitat in local building materials located in hot and dry tropical climate.  
50 We first present a numerical modeling of thermal transfers in a habitat built in blocks of  
51 compressed earth located in the city of Ouagadougou. Then, we analyze the influence of  
52 three types of materials and different thicknesses of these materials on the spatio-temporal  
53 distribution of temperatures in the habitat. Finally, we evaluate the influence of the thermal  
54 inertia of the habitat envelope on the evolution of temperatures according to the rate of air  
55 exchange in the habitat.

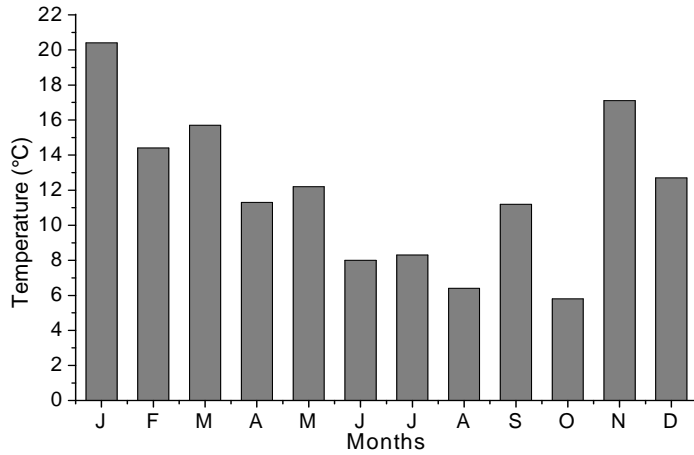


**Figure 1: Mean Variations in Ambient Temperature (Ouagadougou)**

## 2. HABITAT MODELING

### 2.1 Description of the habitat

The habitat model considered is composed of a room with a roof. It is a room with a 5x4m floor and a height of 3m whose main façade is oriented north (Figure 2). It has a window with 1x1m dimension, a rectangular door (2x1m) and a false ceiling topped with a roof inclined at an angle of five degrees to the horizontal. The habitat model is like a parallelepipedic enclosure surmounted by a trapezoidal enclosure which represents the roof. The walls are constructed with agglomerates of Compressed Earth Blocks 18cm thick or cement block with a coating on the inner and outer side 2cm thick. The inside of the wall is covered with white paint. The roof is a complex consisting of plywood false ceiling 2cm thick and a roof made of galvanized steel sheet 1mm thick. The thermo-physical properties of the building envelope are given in Table 1.

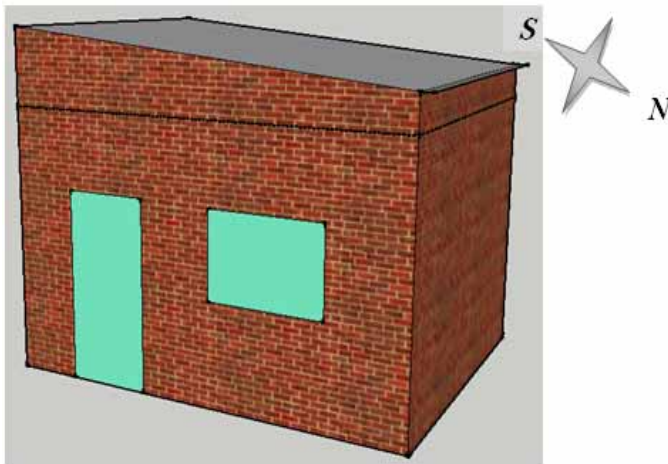

**Figure 2: Perspective of the habitat used**

**Table 1: Thermo-physical Properties of Materials [6], [14]**

Materials	Thermal Conductivity (W/m.K)	Specific Heat (J/kg.K)	Density (kg/m <sup>3</sup> )
Cement agglomerate	0.833	1000	1000
Galvanized steel sheet	50	480	7800
Mortar-coated	1.15	1000	1700
Concrete	1.4	840	2240
Compressed Earth Blocks	0.671	1492	1960
Raw Earth	0.556	1417	1835

## 2.2 Mathematical formulation.

### 2.2.1 Simplifying hypotheses

Let's put the following simplifying assumptions:

- Conduction heat transfers are unidirectional;
- Air is assimilated to a perfect gas perfectly transparent to solar radiations;
- The materials are assimilated to gray bodies;
- Internal sources of heat are nil;
- The thermo-physical properties of the materials used are constant.

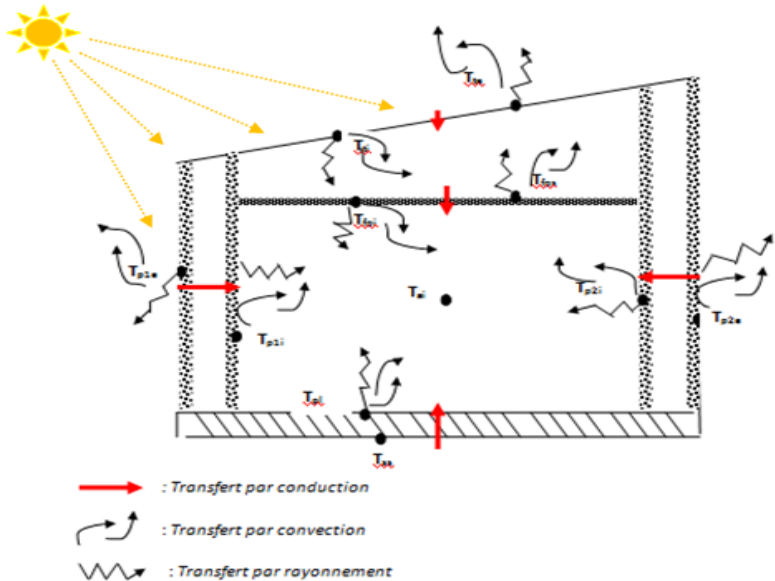


Figure 3: Diagram of heat transfers in the habitat

The method adopted for describing the thermal behavior of the habitat model is based on nodal analysis [15], [11]. In general, if we consider a given node (i) of a habitat component, the instantaneous variation of energy within this component is equal to the algebraic sum of the heat flux densities exchanged through this medium. It is written:

$$\frac{m_i \cdot C_{p_i}}{A} \cdot \frac{dT_i}{dt} = DFS_i + \Phi_i + \sum_i \sum_j \Phi_{x_{ij}} \quad (1)$$

With:

$T_i$  : Temperature or potential of the material (i)

$DFS_i$  : Density of the solar flux absorbed by the component (i) ( $W.m^{-2}$ )

$$DFS_i = \alpha_i \cdot \varphi_i \quad (2)$$

$\alpha_i$  : Absorbance coefficient of the component (i)

$\varphi_i$  : Density of incident flux on the component (i) ( $W.m^{-2}$ )

$\Phi_i$  : Flow density of the heat source of the component (i) ( $W.m^{-2}$ )

$\Phi_{x_{ij}}$ : Flow density exchanged according to the transfer mode between nodes (i) and (j) ( $W.m^{-2}$ )

$$\Phi_{x_{ij}} = h_{x_{ij}} (T_j - T_i) \quad (3)$$

$h_{x_{ij}}$  : Coefficient of exchange between nodes (i) and (j) of the component ( $W.m^{-2}.K$ )

### **2.2.1 Transfer equations**

Taking into account the simplifying hypotheses formulated above, the application of equation (1) to the different environments of the habitat model leads to:

- air

$$\rho_a \cdot C_p \cdot \frac{\partial T_{a_i}}{\partial t} = \sum_j A_j h_{c_j} (T_j - T_{a_i}) + n \cdot V \cdot \rho \cdot C_p (T_o - T_{a_i}) \quad (4)$$

- walls

• External face

$$\frac{\rho_{se} \cdot C_{p_{se}}}{S_e} \cdot \frac{\partial T_{se}}{\partial t} = h_{ce} (T_{ae} - T_{se}) + h_{riel} (T_{ciel} - T_{se}) + h_{rsol} (T_{sol} - T_{se}) + K (T_{si} - T_{se}) + DFS_{se} \quad (5)$$

• Internal face

$$\frac{\rho_{si} \cdot C_{p_{si}}}{S_i} \cdot \frac{\partial T_{si}}{\partial t} = h_{ci} (T_{ai} - T_{si}) + \sum_n h_{r_{se,n}} (T_n - T_{se}) + K (T_{se} - T_{si}) \quad (6)$$

In order to compare the thermal performance of the building envelope according to the material used, we consider some dynamic parameters such as the decrement factor and the time lag [16], [17]. These two parameters make it possible to better characterize the inertia of buildings [9] while taking into account the convective exchanges with the walls. The expressions of these parameters are:

- Time lag (hours)

$$\phi = t_{T_{i,max}} - t_{T_{e,max}} \quad (7)$$

132 With:  $t_{T_{i,\max}}, t_{T_{e,\max}}$  respectively the times at which the maximum indoor and outdoor  
 133 temperature amplitudes are reached.

134 - Decrement factor

$$135 \quad f = \frac{\Delta T_i}{\Delta T_e} = \frac{T_{i,\max} - T_{i,\min}}{T_{e,\max} - T_{e,\min}} \quad (8)$$

136 With:  $\Delta T_i, \Delta T_e$  respectively the maximum amplitudes of the indoor and outdoor  
 137 temperature.

138 Equation (8) shows that the habitat better dampens maximum temperature values when the  
 139 decrement factor is low.

140

## 141 2.2 Resolution method

142 Equations (4), (5) and (6) are discretized by an implicit finite difference method. The  
 143 expressions thus obtained are put in the following form:

$$144 \quad C \frac{T(t + \Delta t) - T(t)}{\Delta t} = AT(t + \Delta t) + BU(t + \Delta t) \quad (9)$$


145 The systems of algebraic equations obtained are solved by the Gauss algorithm coupled to  
 146 an iterative procedure because heat coefficients by radiation and convection depend on the  
 147 temperatures of the different areas which are the unknown of the problem.

148

## 149 2.4. Climate data

150

151 In order to obtain climate data that are representative of the average climate of the city of  
 152 Ouagadougou, we use the concept of a typical year developed by Ouedraogo et al. [18] with  
 153 the Sandia laboratory method from meteorological data of the city of Ouagadougou over a  
 154 period of 15 years (figure 4). We observe in this typical year, that the values of the ambient  
 155 air temperatures are very high during the months of March, April and May. The ambient  
 156 temperatures are relatively low during the winter period and at the end of the year. Figure 5  
 157 shows the evolution of global horizontal solar flux density and ambient air temperature for  
 158 the typical April day. Indeed, the month of April is the hottest time of the year for the city of  
 159 Ouagadougou. The density of the flux reaches a maximum value of 974W / m<sup>2</sup> at 12 o'clock  
 160 and maximum value of the ambient temperature is 40.6 ° C at 15 o'clock. We therefore  
 161 choose the climate data of the typical day in April to analyze the thermal behavior of the  
 162 habitat for extreme weather conditions.

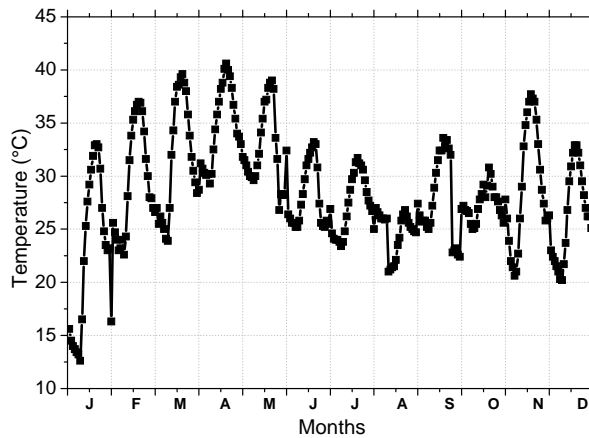

163

164 **Figure 4: Ambient temperature of the typical year [18]**

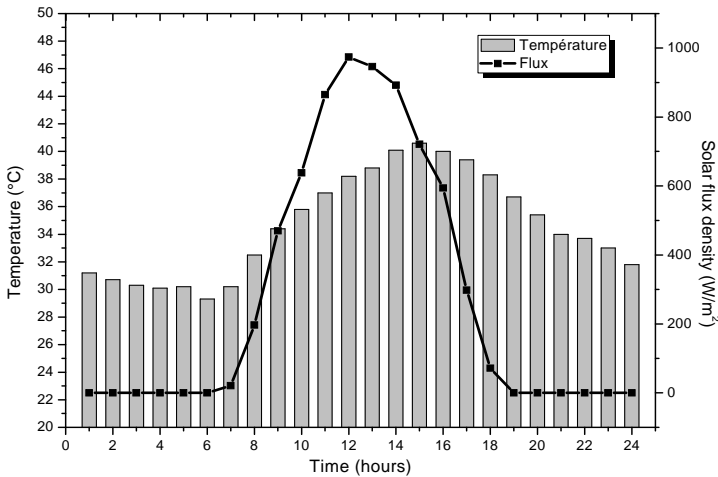


Figure 5: Overall solar flux density and ambient temperature of the typical April day

### 3. VALIDATION OF THE MODEL

In order to validate our numerical code, we applied our model to that of nganya et al. [11] for the city of douala in cameroon located in the hot tropical climate. A comparison between the temperature distributions given by our model and those of nganya shows a good qualitative and quantitative similarity (figure 6). Indeed, the maximum relative difference does not exceed 3.5%. This difference can result from the correlations that we used for the calculation of convective heat transfer coefficients.

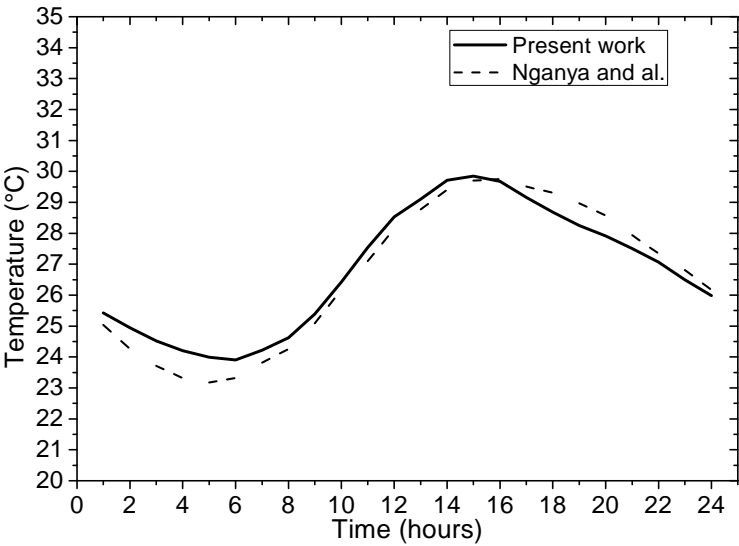


Figure 6: comparison of temperature profiles

182

## 183 4. RESULTS AND DISCUSSION


184

### 185 4.1 Temperature profiles of the different components of the habitat

186

187 *Figure 7* shows the evolution over a day of the indoor air temperature ( $T_{ai}$ ), the inner face of  
 188 the north wall ( $T_{mni}$ ), the false ceiling ( $T_{fp}$ ) and the roof ( $T_{toit}$ ) of the habitat. As has been  
 189 shown by many authors [6], [19], [7], in sub-Saharan Africa, roofing is the component of the  
 190 habitat with the highest heat loss and heat input. Indeed the maximum temperature of the  
 191 habitat is observed at the level of the roof which reaches 58°C at 12 o'clock (*figure 4*).

192 It should also be noted that during the day the evolution of the temperature of the air inside  
 193 the habitat is similar to that of the outside air. Attenuation can be observed between the  
 194 maximum temperatures of outdoor air and indoor air of the habitat during the day with a  
 195 maximum difference of 6°C at 15:00 (*Figure 7*). An analysis of the evolution of the  
 196 temperatures at the level of the false ceiling and the roof shows that the roof generates an  
 197 attenuation of the impact of the solar flux on the temperature of the interior air of the habitat.  
 198 Indeed, the temperature of the false ceiling is significantly lower than that of the roof.  
 199

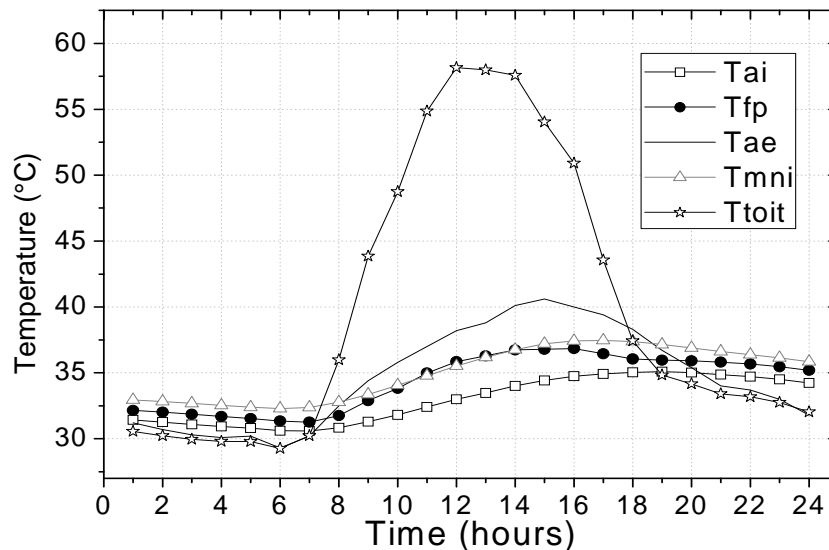

200

201

202

203

204

205

206


207

208

**Figure 7: Evolution of temperature profiles on certain components of the habitat**

The temporal evolution of the temperature of the outer face of the habitat wall is similar to that of the inner face (*Figure 8*). However, the thermal inertia of the material compressed earth blocks of which the wall is made causes a temporal phase shift all the higher as the heat flux captured by this wall is important. Thus, the maximum value of this phase shift is 5 hours (14:00 -19:00).



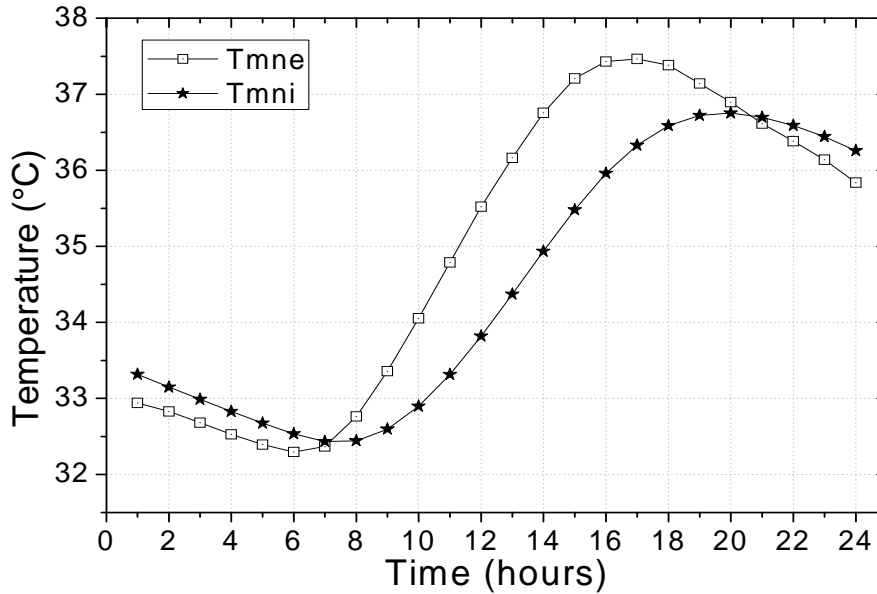


**Figure 8: Evolution of temperature profiles on the external and internal faces of the north wall**

#### 4.2 Characterization of the thermal performance of the building


We analyze the influence of the nature of the materials of the walls of the habitat, during the typical day of April, on the evolution of the temperature of the indoor air (*Figure 9*). On the one hand, these habitats are built, in modern building materials (hollow cement blocks) and on the other hand, in local building materials (compressed earth blocks and raw earth). It should be noted that between 9:00 am and 24:00 pm, the air temperatures inside the habitats whose walls are made of local materials are lower than those in the hollow cement block habitat. In addition, the maximum value of the temperature reached in the cement block room is 38.5°C. They are respectively 35.5°C and 35°C, in the premises whose walls are raw earth and compressed earth blocks. This result is explained by the thermal properties (density, heat mass, conductivity ...). In fact, the compressed earth blocks and the raw earth have a high thermal inertia compared to that of the cement block. It follows that the reduction of the thermal loads of the earth constructions is greater than that of the concrete block constructions.

We can therefore conclude that local construction materials such as raw earth or compressed earth blocks have a higher thermal inertia than cement block.

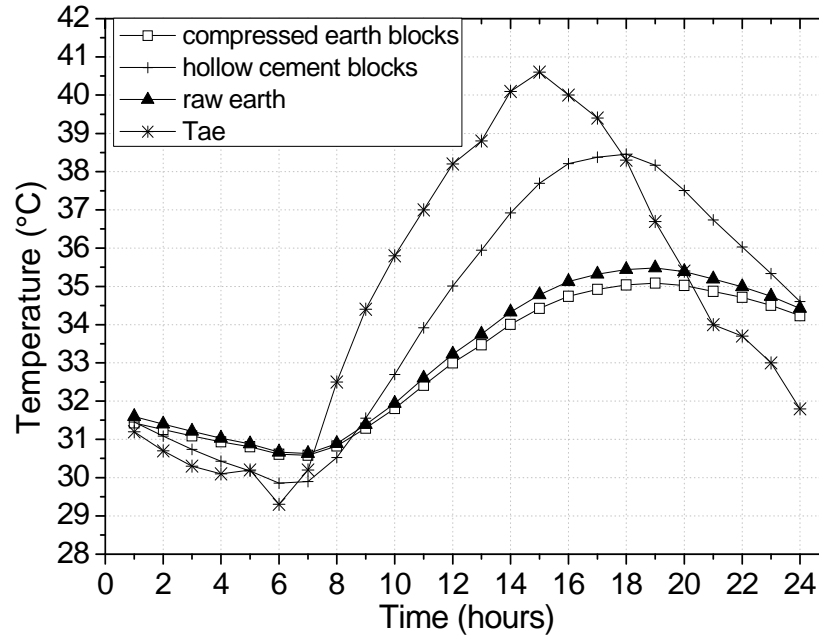


**Figure 9: Evolution of air temperatures in the interior of the house: influence of the composition of the walls**

The influence of the thickness of the wall on the maximum temperatures reached within the habitat is illustrated in *Figure 10*. The analysis of this figure shows that the maximum value of the temperature inside the habitat whose wall thickness is equal to 10cm, can be reduced by 5°C when the thickness of the wall is equal to 50cm. Thus, the temperature inside the habitat is all the more reduced in time compared to that outside, which shows that the thickness of the wall is important and contribute greatly to the reduction of air temperature peaks inside the habitat. This figure also shows that the increase in the thickness of the wall up to 25cm generates a decrease of the maximum values of the temperatures inside the habitat (approximately 1°C for 5cm of additional thickness). The influence of the thickness on the maximum values of the temperature is less important when the thickness of the wall is greater than 25cm (approximately 0.5 ° C for every 5cm of thickness).

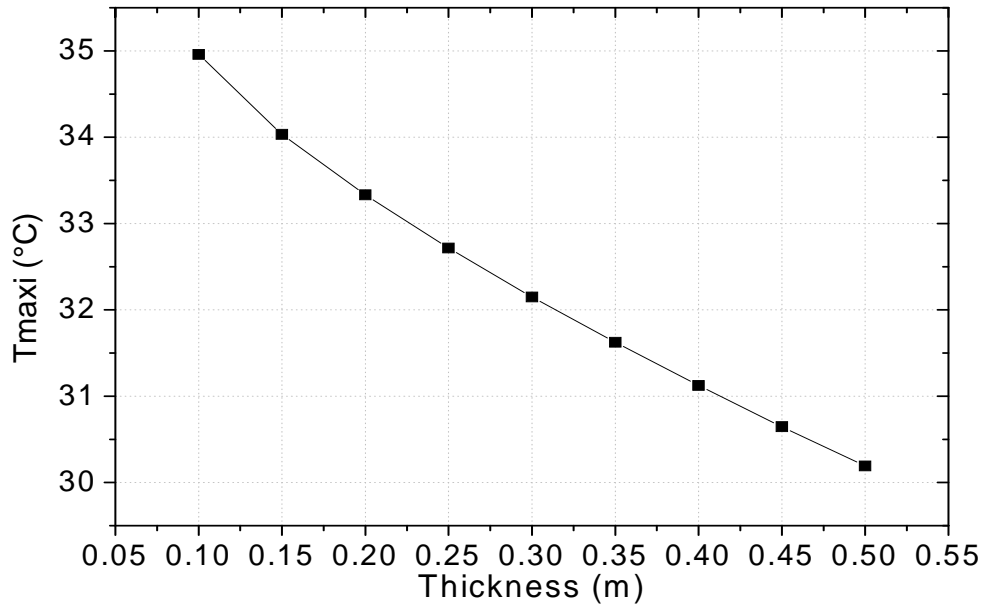


**Figure 10: Maximum temperatures reached by the indoor air of the room according to the thickness of the wall**

The thickness of the wall reduces the maximum values of the indoor air temperature (decrement factor increasingly low) for a given rate of air change (*Figure 11*). It can be seen that the increase of the ventilation also led to an increase of the decrement factor. Moreover, the increase in the thickness of the walls has the consequence of reducing decrement factor. It should be noted that over-ventilation of the habitat causes an increase in the decrement factor. Thus, it is necessary to find an arrangement between the thickness of the wall and the air exchange rate of the room to obtain an indoor air temperature of the habitat in accordance with the notion of thermal comfort. For example, for a room with an air exchange rate of approximately 2.5vol/hour, the reduction of the thermal loads of a wall of thickness equal to 30cm is substantially equal to that of a wall of thickness equal to 50cm.

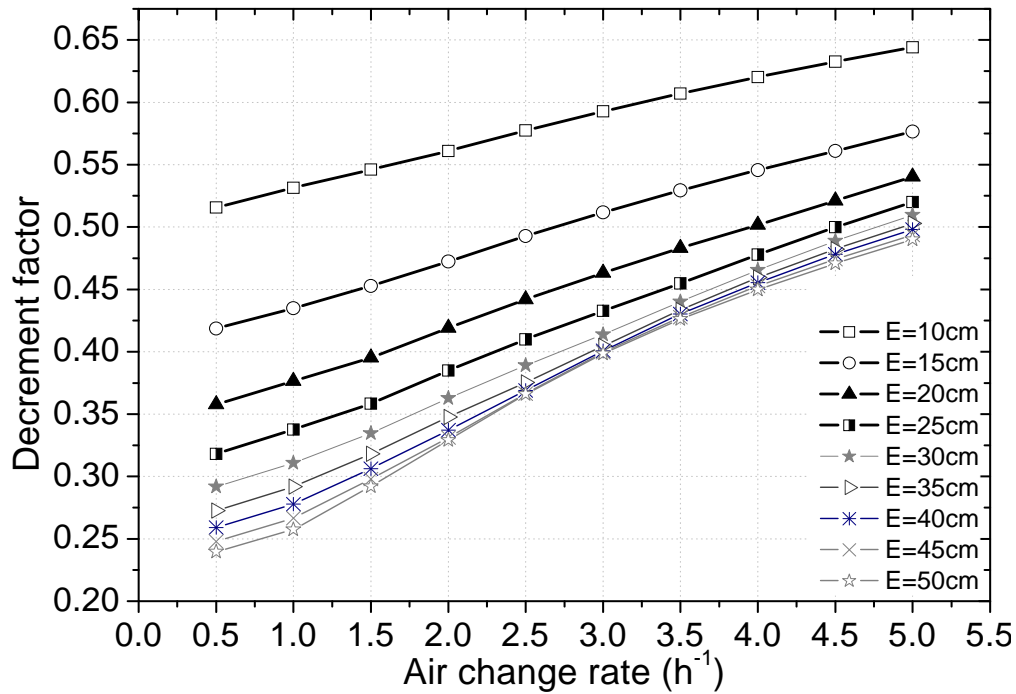

**Figure 11: Decrement factor versus air change rate: Influence of wall thickness**

The time lag difference between the maximum values of the outside and inside temperatures can increase from 2 hours to 6 hours when the wall thickness increases from 10cm to 50cm (figure 12). The increase in the rate of hourly air renewal causes this time lag to fall from a certain value which depends on the thickness of the wall. For example, for a wall of small thickness (10cm), the room can be ventilated with an air renewal rate of 1.5vol / h for a time lag of 2 hours. For a wall of greater thickness (50cm) the time lag difference between inside and outside is 1 hour. The effect of the ventilation decrease the time lag in the habitat, so efficiency of ventilation is partially related to the thickness of the walls of the habitat. To benefit of thermal inertia in a habitat, it's necessary to control ventilation. These results show that the more a habitat is massive, the less it needs to be ventilated.

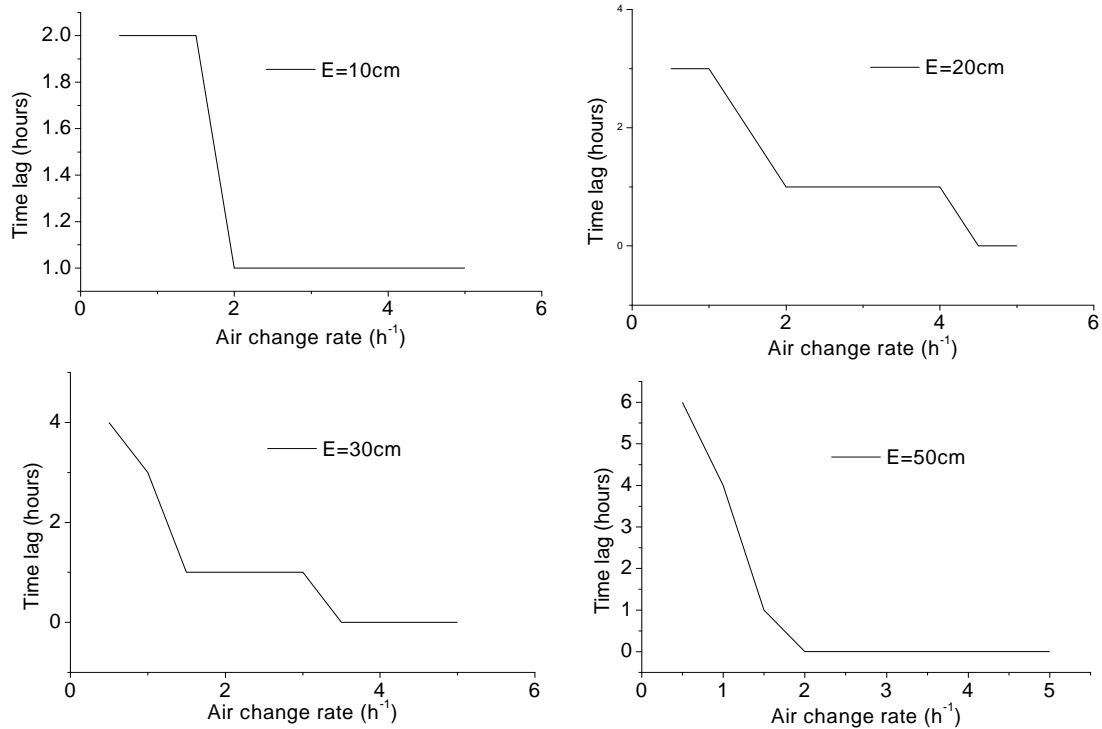

**Figure 12: Time lag according to the rate of air change: influence of the thickness**

## 5. CONCLUSION

We presented a numerical modeling of heat transfer in a dry tropical climate habitat (Ouagadougou city). The transfer equations based on the nodal method are solved by an implicit finite difference method and the Gauss algorithm. We analyzed the influence of the rate of air exchange, the thickness of the walls and their compositions on the spatio-temporal distributions of the indoor air temperature of the habitat and those of its walls.

It emerges from this study that:

- The raw earth and compressed earth blocks habitats offer a better indoor thermal environment than those in modern building materials (cement blocks) which is used more and more in the construction of habitats in Burkina Faso.
- The thickness of the wall plays an important role in the evolution of the maximum temperatures inside the habitat. Indeed, the increase in the thickness of the walls contributes to a better thermal inertia of the housing envelope, improves the decrement factor and the time lag difference between the inside and the outside.
- In buildings with high inertia, the rate of air exchange must be controlled because the effect of over-ventilation has a negative impact on the capacity of the habitat to reduce the maximum temperature values. This effect conducts to a considerable reduction of the time lag of the temperatures inside the habitat.

302 **COMPETING INTERESTS**

303

304

305

306 **REFERENCES**

307

308

- [1] Cheung C and al., «Energy-efficient envelope design for high-rise apartments.,» *Energy Build*, vol. 37, n° 11, pp. 37-48, 2005.
- [2] Perez-Lombard and al., «A review on energy consumption information.,» *Energy Build*, vol. 40, n° 13, pp. 394-8, 2008.
- [3] Bastide A. and al., «Building energy efficiency and thermal comfort in tropical climates: presentation of a numerical approach for predicting the percentage of well-ventilated living spaces in buildings using natural ventilation.,» *Energy Build*, vol. 38, n° 19, pp. 1093-103, 2006.
- [4] B. I. Al-Saadi S., «Performance based envelope design for residential building in hot climates.,» *Proceedings of building simulation*, 2007.
- [5] S. Mirrahimi and. al, «The effect of building envelope on thermal comfort and energy saving for high-rise building in hot humid climate.,» *Renewable and sustainable Energy Reviews*, vol. 53, pp. 1508-1519, 2016.
- [6] Madi Kabore and al., «Assesment on passive cooling techniques to improve steel roof perormance in hot tropical climate.,» *International Journal of Energy and Power Engineering*, vol. 3, n° 16, pp. 287-295, 2014.
- [7] I. Ouédraogo and al., «Modeling of a bioclimatic roof using natural ventilation.,» *International Scientific Journal for Alternative Energy and ecology*, vol. 62, n° 16, 2008.
- [8] Bojic M. and al., «Energy performance of windows in high-rise residential buildings in Hong Kong.,» *Energy and Buildings*, vol. 34, n° 11, pp. 71-82, 2002.
- [9] A. Gagliano and al., «Assessment of the dynamic thermal performance of massive buildings.,» *Energy and Buildings*, vol. 72, pp. 361-370, 2014.
- [10] Institut de la Francophonie pour le Developpemnt durable (IFDD), «Efficacité énergétique de la climatisation en région tropicale. Tome1: Conception des nouveaux bâtiments.,» PRISME, 2001.
- [11] Thomas Nganya and al., «Elaboration of a bioclimatic house in humid tropical region: Case of the town of Douala-Cameroon.,» *Energy and building*, vol. 54, pp. 105-110, 2012.
- [12] G. Evola and al., «Combining thermal inertia, insulation and ventilation for improving indoor summer thermal comfort.,» chez *34th AIVC Conference*, Athens, 2013.

- [13] Institut de la Francophonie pour le Developpemnt durable (IFDD), Organisation Internationale de la francophonie (OIF), «Guide du bâtiment durable en régions tropicales. Tome 1: Stratégies de conception des nouveaux bâtiments en régions tropicales,» 2015.
- [14] . Emmanuel Ouedraogo and al., «Caractérisation mécanique et thermophysique des blocs de terre comprimée stabilisée au papier (cellulose) et/ou au ciment,» *Journal of Materials and Engineering Structures*, vol. 2, pp. 68-76, 2015.
- [15] H. BOYER and al., «Thermal building simulation and computer generation of nodal models».
- [16] K. Ulgen, «Experimental and theorical investigation of effects of wall's thermophysical properties on time lag and decrement factor.,» *Energy and buildings*, vol. 34, pp. 273-278, 2002.
- [17] G. Evola and al., «A dynamic parameter to describe the thermal response of building to radiant heat gains.,» *Energy and Buildings*, vol. 65, pp. 448-457, 2013.
- [18] E. Ouedraogo and al., «Elaboration d'une année météorologique type de la ville de Ouagadougou pour l'étude des performances énergétiques des bâtiments,» *Revue des Energies renouvelables*, vol. 15, n° 11, pp. 77-90, 2012.
- [19] A. Kemajou, L. Mba, «Real impact of the thermal inertia on the internal ambient temperature of the building in the hot humid climate: simulation and experimental study in the city of Douala in Cameroon,» *International Journal of Research and Reviews in Applied Sciences*, vol. 11, n° 13, pp. 358-367, 2012.
- [20] CEDEAO, «Rapport d'étape sur les énergies renouvelables et l'efficacité enrgetique de la CEDEAO,» 2014.
- [21] Institut de la Francophonie pour le Developpemnt durable (IFDD), «Les systèmes de ventilation et de climatisation. Fiche technique PRISME 2,» IEPF, 2001.
- [22] M. Ozel, «Effect of wall orientation on the optimum insulation thickness,» *Applied Energy*, vol. 88, p. 2429–2435, 2011.
- [23] «Institut de l'Energie et de l'Environnement de la Francophonie (IEPF), « Les systèmes de ventilation et climatisation»,» Fiche technique PRISME 2, <http://www.iepf.org/ressources/ressources-pub.php?id = 2 & année = 2001>, 2001.
- [24] R. Zeng and al., « New concepts and approach for developing energy efficient buildings: Ideal specific heat for building internal thermal mass.,» *Energy and Buildings*, vol. 43, n° 15, pp. 1081-1090, 2011.
- [25] Laura Bellia and al., «The role of weather data files in climate-based daylight modeling,» *Solar Energy*, vol. 112, pp. 169-182, 2015.

- [26] Roberto Z, Freire, «Development of regression equations for predicting energy and hygrothermal performance of buildings.,» *Energy and Buildings*, vol. 40, pp. 810-820, 2008.