

Combined Solitary Wave Solutions in Higher-order Effects Optical Fibers

ABSTRACT

We construct in this manuscript, the combined solitary wave solutions of nonlinear Schrödinger equation that governs the dynamics of propagation of waves in optical fibers with higher-order effects. We base our survey on the sum of two analytic shapes of the solitary waves of bright and dark type to form a resulting solitary wave to determine.

1. INTRODUCTION

The physical systems are generally governed by the partial differential equations that are in most cases nonlinear. When these partial differential equations are linear, they obey the principles of superposition and especially of the uniqueness of the solution. When these partial differential equations are nonlinear, the principle of linear combination of the solutions is not applicable and the approach in the resolution varies according to the type of equation and especially of the type of solutions that one wants to get. Thus, it becomes difficult to speak of standard method of resolution or unique solution. It is exactly for this reason that the multiple methods and different approaches developed by many authors exist [1-12] with the aim of solving the considered equation completely or to find the approached solutions with a minimal error margin. Beyond all these methods of integration of the nonlinear partial differential equations, the research of the forced solutions occupies an important place. To adapt and to exploit the natural phenomena which surround us in order to improve our daily work. Among the searched solutions, the solitary wave probably occupies a very important place because of its futuristic applications. This fact is translated in many articles written by many researchers [13-20]. In this dynamics, we construct some solitary wave solutions of the nonlinear partial differential equation that govern the propagation of waves in the greatly nonlinear effects optical fibers and govern by the equation [21, 22]

$$U_z - i\alpha_1 U_{tt} - i\alpha_2 |U|^2 U - \alpha_3 U_{ttt} - \alpha_4 (|U|^2 U)_t - \alpha_5 U (|U|^2)_t = 0, \quad (1)$$

where U is the slowly varying envelope of the electric field, the subscripts z and t denote the spatial and temporal partial derivatives, and α_1 , α_2 , α_3 , α_4 and α_5 are real constants related to the group-velocity dispersion, the self-phase modulation, the third-order dispersion, the self-steepening, and the delayed nonlinear response effect, respectively. The solutions that we construct effectively are of type combined solitary wave; that means resulting from a combination of the

bright solitary wave and dark solitary wave. Otherwise to say the solutions that we want to construct are of the shapes

$$U_{ij}(z, t) = \sum_{i,j} a_{ij} \frac{\sinh^j \alpha t}{\cosh^i \alpha t} \exp - i(kz - \omega t), \quad (2)$$

where a_{ij} , α , k and ω are constants to be determined as a function of the parameters α_χ ($\chi = 1, 2, \dots, 5$) of equation (1); $i = 1, 2, \dots$; $j = 0, 1$. If we define for example from equation (2), two solutions as

$$U_1(z, t) = \left(\frac{a}{\cosh \alpha t} + b \frac{\sinh \alpha t}{\cosh \alpha t} \right) \exp - i(kz - \omega t), \quad (3)$$

and

$$U_2(z, t) = \left(\frac{c}{\cosh^2 \alpha t} + d \frac{\sinh \alpha t}{\cosh^2 \alpha t} \right) \exp - i(kz - \omega t), \quad (4)$$

where the constants a , b , c and d are to be determined, we see that U_1 is constituted by $U_{11} = (a / \cosh \alpha t) \exp - i(kz - \omega t)$ which is a bright solitary wave and $U_{12} = (b \sinh \alpha t / \cosh \alpha t) \exp - i(kz - \omega t)$ which is a dark solitary wave. On the other hand U_{22} is constituted by $U_{12} = (c / \cosh^2 \alpha t) \exp - i(kz - \omega t)$ which is a bright solitary wave and $U_{22} = (d \sinh \alpha t / \cosh^2 \alpha t) \exp - i(kz - \omega t)$ which is a dark solitary wave.

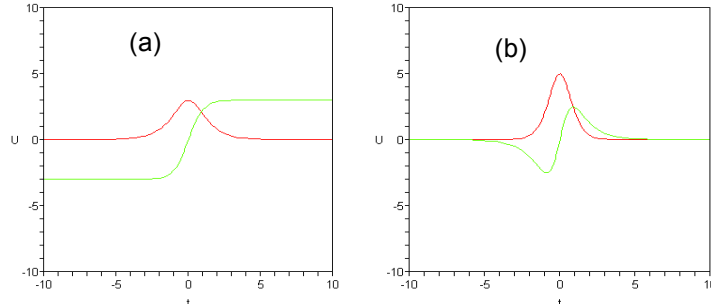


Fig. 1. Curves of $|U_{11}|$, $|U_{12}|$, $|U_{21}|$ and $|U_{22}|$ as a function of time; (a): the red curve indicates the profile of $|U_{11}|$ for $a = 5$ and $\alpha = 1$; the green curve the profile of $|U_{12}|$ for $b = 5$ and $\alpha = 1$; (b): the red curve indicates the profile of $|U_{21}|$ for $c = 5$ and $\alpha = 1$; the green curve gives the profile of $|U_{22}|$ for $d = 5$ and $\alpha = 1$;

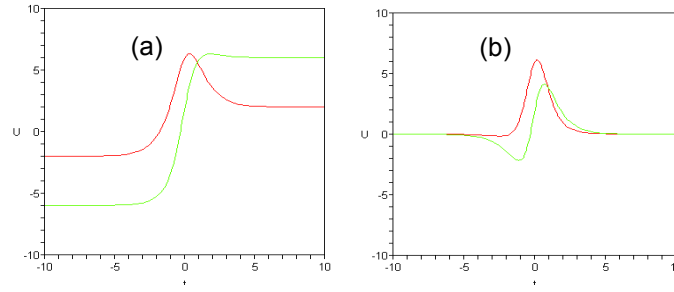


Fig. 2. Curves of $|U_1|$ and $|U_2|$ as a function of time; (a):the red curve indicates the profile of $|U_1|$ for $a = 6$, $b = 2$ and $\alpha = 1$; the green curve the profile of $|U_1|$ for $a = 2$, $b = 6$ and $\alpha = 1$; (b): the red curve indicates the profile of $|U_2|$ for $c = 6$, $d = 2$ and $\alpha = 1$; the green curve gives the profile of $|U_1|$ for $c = 2$, $d = 6$ and $\alpha = 1$;

The curves of the Figure1 show the profiles of single solitary waves and the curves of the Figure 2 show the profiles of the combined solitary waves. In the two cases the red curves indicate the bright solitary waves and the green curves indicate the dark solitary waves.

Thus, the combined solutions U_1 and U_2 can be bright or dark type according to the choice of the coefficients a , b , c and d . When $a > b$, U_1 is a bright soliton. It becomes a dark soliton when $a < b$. For U_2 , we have the same findings depending on $c > d$ or $c < d$. The above diagrams illustrate these different analyses. So in a general manner when we have a composite solitary wave formed of an association of two solitary waves of the type pulse and kink, the profile of the solitary wave gotten is either the one of a pulse or a dark. All depends on the choice of the parameters. In some cases the gotten profiles can stretch toward a bright or toward a dark without take the complete shape of the bright or the dark. In the setting of this survey, what interests us is the case where the composite solitary wave is formed of an association of a pulse and a kink and why? Because the sum of the solitary waves of the same nature gives a resultant solitary wave of this considered nature.

These types of solutions as we want to look for can have numerous applications in physics. It is besides this principle of analysis that motivates the construction of the solutions as we propose in this work. We organize the manuscript in the following manner:
Before constructing some solutions under the shape proposed in equation (2), we look for in section 2 of the possible solutions of the shape $(a \sinh^m \alpha t / \cosh^n \alpha t) \exp - i(kz - \omega t)$. In section 3, we construct the solutions of the type equation (3). Section 4 proposes the solutions of the type in equation (4). Finally, section 5 concludes the work.

2. METHOD OF RESOLUTION

The principle consist of searching globally for the solutions of equation (1) in the form

$$v = \sum_{i,j} a_{ij} (\cosh \alpha x)^j / (\sinh \alpha x)^i, \quad (5)$$

where α and a_{ij} are the coefficients to determine. When we introduce the ansatz (5) in equation (1) we obtain with the help of adequate transformations [7, 8], an equation of the form

$$\begin{aligned} & \sum_{i,j,n} F(a_{ij}) / \cosh^n \alpha x + \sum_{i,j,m} G(a_{ij}) \sinh \alpha x / \cosh^m \alpha x \\ & + \sum_{i,j,k} H(a_{ij}) \cosh^k \alpha x + \sum_{i,j,l} T(a_{ij}) \cosh^l \alpha x \sinh \alpha x + \sum_{i,j} W(a_{ij}) = 0 \end{aligned} \quad (6)$$

$F(a_{ij})$, $G(a_{ij})$, $H(a_{ij})$, $T(a_{ij})$ and $W(a_{ij})$ are linear functions of the coefficients a_{ij} . From equation (6), we obtain the series of equations of constants a_{ij} to solve. Notably the equations such as follows:

Term in $1 / \cosh^n \alpha x$,

$$\sum_{i,j} F(a_{ij}) = 0, \quad (7)$$

Term in $\sinh \alpha x / \cosh^m \alpha x$,

$$\sum_{i,j} G(a_{ij}) = 0, \quad (8)$$

Term in $\cosh^k \alpha x$,

$$\sum_{i,j} H(a_{ij}) = 0, \quad (9)$$

Term in $\cosh^l \alpha x \sinh \alpha x$,

$$\sum_{i,j} T(a_{ij}) = 0, \quad (10)$$

Term in $(\sinh \alpha x)^0 / (\cosh \alpha x)^0$,

$$\sum_{i,j} W(a_{ij}) = 0. \quad (11)$$

Finally, the resolution of the above equations (7), ..., (11) permits to obtain the constants a_{ij} .

3. RESULTS AND DISCUSSION

3.1 Single solitary wave solution

In this section we look for the single solitary waves that are the solutions of the equation (1). Thus, we suppose that

$$U(z, t) = a \frac{\sinh^m \alpha t}{\cosh^n \alpha t} \exp -i(kz - \omega t), \quad (12)$$

is the solution of equation (1) where a , α and k are constants to be determined, n and m are the whole numbers to be determined. Then inserting equation (12) in equation (1) yields

$$\sum_{n,m} F_{nm}(a, k, \alpha, n, m) \frac{\sinh^m \alpha t}{\cosh^n \alpha t} = 0, \quad (13)$$

where $F_{nm}(a, k, \alpha, n, m)$ are the function of the constants a, k, α, n and m . The non trivial solutions are only gotten for $m = 0$ and $n = 1$. Thus, the coefficients of the terms in $1/\cosh^3 \alpha t$, $1/\cosh \alpha t$, $\sinh \alpha t / \cosh^4 \alpha t$ and $\sinh \alpha t / \cosh^2 \alpha t$ give respectively

$$\alpha^2 (2\omega\alpha_3 - 2\alpha_1) - (\alpha_2 + \omega\alpha_4)|a|^2 = 0, \quad (14)$$

$$i[-k + \alpha_1(1 + \omega^2)\alpha^2 - 2\alpha^2\omega\alpha_3] - \alpha_3\omega^2 = 0, \quad (15)$$

$$6\alpha_3\alpha + (3\alpha_4 + 2\alpha_5)|a|^2 = 0, \quad (16)$$

and

$$2\alpha_1\omega + (2\alpha\omega^2 + 1 + \omega^2)\alpha^2\alpha_3 = 0 \quad (17)$$

The resolution of equations (14) and (16) gives

$$\alpha = \frac{-6(\alpha_3\alpha_2 + \omega\alpha_3\alpha_4)}{6\omega\alpha_3\alpha_4 - 4\omega\alpha_3\alpha_5 - 6\alpha_1\alpha_4 - 4\alpha_1\alpha_5}, \quad (18)$$

and

$$|a| = \frac{\alpha^2 (2\omega\alpha_3 - 2\alpha_1)}{\alpha_2 + \omega\alpha_4}, \quad (19)$$

with $6\omega\alpha_3\alpha_4 - 4\omega\alpha_3\alpha_5 - 6\alpha_1\alpha_4 - 4\alpha_1\alpha_5 \neq 0$ and $\alpha_2 + \omega\alpha_4 \neq 0$. On the other hand equation (15) gives

$$k = \alpha_1(1 + \omega^2)\alpha^2 - 2\alpha^2\omega\alpha_3 + i\alpha_3\omega^2, \quad (20)$$

where α is given by equation (18). Similarly equation (17) is written

$$(2\alpha^3 + \alpha^2\alpha_3)\omega^2 - 2\alpha_1\omega + \alpha^2\alpha_3 = 0. \quad (21)$$

In the case where the condition $\alpha_1^2 - \alpha^2\alpha_3(2\alpha^3 + \alpha^2\alpha_3) \geq 0$ is verified, we obtain from equation (21)

$$\omega = \frac{\alpha_1 \pm \sqrt{\alpha_1^2 - \alpha^2\alpha_3(2\alpha^3 + \alpha^2\alpha_3)}}{2\alpha^3 + \alpha^2\alpha_3}. \quad (22)$$

Taking into account the equations (18), (19), (20) and (22) in equation (12), we obtain the solution

$$U(z, t) = \pm \alpha \sqrt{\frac{2\omega\alpha_3 - 2\alpha_1}{\alpha_2 + \omega\alpha_4}} \sec h \alpha t \exp(\alpha_3\omega^2 z) \exp - i(\Omega z - \omega t), \quad (23)$$

with $\Omega = \alpha_1(1 + \omega^2)\alpha^2 - 2\alpha^2\omega\alpha_3$ such that α and ω are given respectively by equations (18) and (22).

3.2 Solution of the form $U_1(z, t) = (a/\cosh \alpha t + b \sinh \alpha t / \cosh \alpha t) \exp - i(kz - \omega t)$

The substitution of equation (3) in equation (1) leads to

$$\sum_{q,p} (H_{qp}(a, b) + iG_{qp}(a, b)) \frac{\sinh^p \alpha t}{\cosh^q \alpha t} = 0, \quad q = 1, 2, \dots, 5; \quad p = 0, 1 \quad (24)$$

where $H_{qp}(a, b)$ and $G_{qp}(a, b)$ are the functions of a and b , $i^2 = -1$. From equation (24), we obtain the series of equations of constants a and b

$$\sum_{q,p} H_{qp}(a, b) = 0, \quad (25)$$

and

$$\sum_{q,p} G_{qp}(a, b) = 0. \quad (26)$$

Some particular solutions of a and b can be obtain by summing equations (25) and (26). Then equation (25) and equation (26) lead to

$$\sum_{q,p} (H_{qp}(a, b) + G_{qp}(a, b)) = 0. \quad (27)$$

Then from equation (27), we have

Term in $1/\cosh^4 \alpha t$,

$$a^2 \alpha (\alpha_5 + 9\alpha_4) - \alpha (\alpha_5 + 3\alpha_4) b^2 + 3\alpha_2 ab = 0, \quad (28)$$

Term in $1/\cosh^3 \alpha t$,

$$b^2 - a^2 = -\frac{\alpha^2}{\alpha_2} (\alpha_3 \omega + 2\alpha_1), \quad (29)$$

Term in $1/\cosh^2 \alpha t$,

$$\alpha_4 \alpha (2b^2 - 6a^2) - (3\alpha_2 \omega^2 + 2\alpha_1 \omega) \alpha - 2\alpha_2 a = 0, \quad (30)$$

Term in $1/\cosh \alpha t$,

$$\alpha_5 \alpha (4a^2 b - 2b^3) - \alpha_2 ab^2 + (a\omega^2 - 3\alpha_3 \omega \alpha^2 + \alpha_1 \omega^2 - \alpha_1 \alpha^2 - k) a = 0. \quad (31)$$

Another equations which derive from the term in $\sinh \alpha t / \cosh^l \alpha t$, $l = 1, 2, \dots, 5$ can allow to establish the constraint relations between the parameters of the physics system governs by equation (1). Combining equations (29) and (30), we obtain

$$4\alpha_2 \alpha_4 \alpha a^2 + 2\alpha_2^2 a + 2\alpha_4 \alpha^3 + \alpha_2 (3\alpha_2 \omega^2 + 2\alpha_1 \omega) \alpha = 0. \quad (32)$$

Equation (32) is a quadratic equation in a . It resolution gives

$$a = \frac{-\alpha_2^2 \pm \sqrt{\Delta'}}{4\alpha_2 \alpha_4}, \quad (33)$$

with $\Delta' = \alpha_2^4 - 4\alpha_2 \alpha_4 \alpha^2 (2\alpha_4 \alpha^2 + 3\alpha_2^2 \omega^2 + 2\alpha_1 \alpha_2 \omega)$ such that $\Delta' \geq 0$. Inserting equation (33) in equation (29), we obtain

$$b = \pm \sqrt{\frac{1}{4\alpha_2 \alpha_4} \left[\left(-\alpha_2^2 \pm \sqrt{\Delta'} \right)^2 - 16\alpha_2 \alpha_4^2 (\alpha_3 \omega + 2\alpha_1) \right]}. \quad (34)$$

Taking into account equation (33) and equation (34) into equation (3), we obtain

$$U_1(z, t) = \left[\begin{array}{l} \left(\frac{-\alpha_2^2 \pm \sqrt{\Delta'}}{4\alpha_2\alpha_4} \right) \operatorname{sech} \alpha t \\ \pm \sqrt{\frac{1}{4\alpha_2\alpha_4} \left[\left(-\alpha_2^2 \pm \sqrt{\Delta'} \right)^2 - 16\alpha_2\alpha_4^2 (\alpha_3\omega + 2\alpha_1) \right]} \tanh \alpha t \end{array} \right] \exp -i(kz - \alpha t). \quad (35)$$

3.1 Solution of the form $U_2(z, t) = (c / \cosh^2 \alpha t + d \sinh \alpha t / \cosh^2 \alpha t) \exp -i(kz - \alpha t)$

Substituting ansatz (4) in equation (1), we obtain the range equation

$$\sum_{\mu, \gamma} R_{\mu\gamma}(a, b, \alpha, \omega, k) \frac{\sinh^\gamma \alpha t}{\cosh^\mu \alpha t} + i \sum_{\mu, \gamma} T_{\mu\gamma}(a, b, \alpha, \omega, k) \frac{\sinh^\gamma \alpha t}{\cosh^\mu \alpha t} = 0, \quad (36)$$

where $R_{\mu\gamma}(a, b, \alpha, \omega, k)$ and $T_{\mu\gamma}(a, b, \alpha, \omega, k)$ are functions of constants to determine; $i^2 = -1$.

The real part and the imaginary part of equation (36) lead to the set of equations according to the Bogning-Djeumen Tchaho-Kofané method (BDKm) [7, 8]

$$\sum_{\mu, \gamma} R_{\mu, \gamma}(a, b, \alpha, \omega, k) = 0, \quad (37)$$

and

$$\sum_{\mu, \gamma} T_{\mu\gamma}(a, b, \alpha, \omega, k) = 0. \quad (38)$$

The combination of equations (37) and (38) which derive from the same terms in $\sinh^\gamma \alpha t / \cosh^\mu \alpha t$ ($\gamma = 0$) leads to the following equations:

Term in $1 / \cosh^7 \alpha t$,

$$4\alpha(c^2 d - d^3)(\alpha_4 + \alpha_5) = 0, \quad (39)$$

Term in $1 / \cosh^6 \alpha t$,

$$8c^2 d \alpha (\alpha_4 + \alpha_5) + c \alpha_2 (c^2 - 3d^2) = 0, \quad (40)$$

Term in $1 / \cosh^5 \alpha t$,

$$2(\alpha_4 + \alpha \alpha_5) c^2 - (2\alpha_4 + \alpha \alpha_4 + 3\alpha \alpha_5) d^2 + 12\alpha_1 \alpha^2 = 0, \quad (41)$$

Term in $1 / \cosh^4 \alpha t$,

$$2\alpha^2 c^2 d (\alpha_4 + \alpha_5) - 6\alpha_1 \alpha^2 c + 3\alpha_2 d^2 c + 6\alpha_3 \alpha^2 \omega c = 0, \quad (42)$$

Term in $1 / \cosh^3 \alpha t$,

$$4\alpha_1 \alpha \omega d - \alpha_3 (20\alpha^3 d - 6\alpha \omega^2 d) + 2\alpha (\alpha_4 + \alpha_5) d^3 = 0, \quad (43)$$

Term in $1 / \cosh \alpha t$,

$$\alpha_1 \omega \alpha d - \alpha_3 (-\alpha^3 + 2\alpha \omega^2) d = 0. \quad (44)$$

The resolution of equation (39) supposes three possibilities. The case where $d(c^2 - d^2) = 0$ and $\alpha_4 + \alpha_5 = 0$, the case where $d(c^2 - d^2) = 0$ and $\alpha_4 + \alpha_5 \neq 0$ and the case where

211 $d(c^2 - d^2) \neq 0$ and $\alpha_4 + \alpha_5 = 0$. It is important to mention that we are looking for the non
 212 trivial solutions of equation (1). So a and b must be different from zero. Only the case $d \neq 0$,
 213 $c \neq d$ and $\alpha_4 + \alpha_5 = 0$ permits to obtain the non trivial solutions. Thus, taking into account
 214 equation (39) into equation (40) yields

$$215 \quad c^2 = 3d^2. \quad (45)$$

216 Introducing equation (45) in equation (41) gives

$$217 \quad d^2 = \frac{12\alpha_1\alpha^2}{\alpha\alpha_4 - 4\alpha_4 - 3\alpha\alpha_5}, \quad (46)$$

218 and
 219

$$220 \quad c^2 = \frac{36\alpha_1\alpha^2}{\alpha\alpha_4 - 4\alpha_4 - 3\alpha\alpha_5}, \quad (47)$$

221 with $\alpha\alpha_4 - 4\alpha_4 - 3\alpha\alpha_5 \neq 0$. Taking into account equations (46) and (47) into equation (41) and
 222 (42) allows to obtain α as a function of α_i ($i = 1, 2, \dots, 5$) and consequently the relation which can
 223 help to determine ω as a function of a_i such as

$$224 \quad \begin{aligned} & 20\alpha_3(24\alpha_3\alpha_4\omega - 24\alpha_1\alpha_4 - 108\alpha_1)^2 \\ & = (4\alpha_1\omega + 6\alpha_3\omega^2)(6\alpha_1\alpha_4 - 18\alpha_1\alpha_5 - 6\alpha_3\alpha_4\omega + 18\alpha_3\alpha_4\omega)^2. \end{aligned} \quad (41)$$

225 On the other hand introducing the obtained expressions of α and ω in other equations as (37 and
 226 (38)), we obtain the expression of k as a function of α_i . Then taking into account equation (39) and
 227 (40) in equation (4), we obtain

$$228 \quad U_2(z, t) = \left[\begin{aligned} & \pm 6\alpha \sqrt{\frac{\alpha_1}{\alpha\alpha_4 - 4\alpha_4 - 3\alpha\alpha_5}} \sec h^2 \alpha t \\ & \pm \alpha \sqrt{\frac{12\alpha_1}{\alpha\alpha_4 - 4\alpha_4 - 3\alpha\alpha_5}} \sinh \alpha t \sec h^2 \alpha t \end{aligned} \right] \exp - i(kz - \omega t). \quad (42)$$

229
 230
 231
 232
 233
 234

4. CONCLUSION

235 The aim of this work was to construct some forced solutions of type lone wave. For this
 236 reason we carried our choice on the combined solitary wave solutions that means a solitary wave
 237 that result from the association of a solitary wave of type pulse and kink. Otherwise to say a solitary
 238 wave which can take according to the choice of the parameters, a shape pulse or kink. In the setting
 239 of BDKm used in this work, when one has several equations of the constants, one limits itself to the
 240 resolution of the equations of the first range susceptible to produce the solutions that come closer
 241 to best of the exact solution. In case of the solution given by the equation (46), we concentrated our
 242 analysis to the range of equations in $1/\cosh^l \alpha t$ with $l = 1, 2, \dots, 7$. What spur our interest in the
 243 construction of such solutions is that these solutions will have important applications in physics or in

244 engineering of telecommunication. The survey made in this manuscript can be spread to the cases
 245 where the solution composite solitary wave is an association of three solitary waves, four and more.

250
 251
 252
 253

254 REFERENCES

- 255 [1] Fan , E. (200). Extended tanh-function method and its applications to nonlinear equations.
 256 Physics Letter A 277, 212-218.
- 257 [2] E. J. Parkes , E. J. and Duffy, B. R. (1996). An automated tanh-function method for finding solitary
 258 wave solutions to nonlinear evolution equations. Comput. Phys. Commun, 98 288-300.
- 259 [3] A. H. Khater, A. H., Malfiet, W., Callebaut D. K. and Kamel E. S. (2002). The tanh method, a
 260 simple transformation and exact analytical solutions for nonlinear reaction-diffusion equations.
 261 Chaos, Solitons & Fractals, 14, 513-522.
- 262 [4] Kaup , D. J. and Lakoba, T. I. (1996). Variational method: How it can generate false instabilities, J.
 263 Math. Phys, 37 (7), 3442-3462.
- 264 [5] A. M. Wazwaz, A. M. (2002). The tanh method for traveling wave solutions of nonlinear
 265 equations, Appl. Math. Comput, 133, 213-227.
- 266 [6] Wazwaz, A. M. (2001). A computational approach to soliton solutions of the Kadomtsev-
 267 Petviashvili equation, Appl. Math. Comput. 123, 205-217.
- 268 [7] Bogning, J. R., Djeumen Tchaho , C. T. and Kofané, T. C. (2012) Construction of the soliton
 269 solutions of the Ginzburg-Landau equations by the new Bogning-Djeumen Tchaho-Kofané method,
 270 Phys. Scr, 85, 025013-025018.
- 271 [8] Bogning, J. R., Djeumen Tchaho, C. T. and Kofané, T. C. (2012). Generalization of the Bogning-
 272 Djeumen Tchaho-Kofané method for the construction of the solitary waves and the survey of the
 273 instabilities, Far East J. Dyn. Sys, **20**(2), 101-119.
- 274 [9] Djeumen Tchaho, C. T., Bogning, J. R. and Kofané, T. C. (2012). Modulated Soliton solution of
 275 the Modified Kuramoto-Sivashinsky's equation. American Journal of Computational and Applied
 276 Mathematics, 2(5), 218- 224.
- 277 [10] Djeumen Tchaho, C. T., Bogning , J. R. and Kofane, T. C. (2011). Multi-Soliton solutions of the
 278 modified Kuramoto-Sivashinsky's equation by the BDK method, Far East J. Dyn. Sys, 15(2), 83-98.
- 279 [11] Bogning, J. R. and Kofane, T. C. (2006). Analytical Solutions of discrete nonlinear Schrödinger
 280 equation in arrays of optical fibers, Chaos, Solitons & Fractals, 28, 48-153.
- 281 [12] Bogning, J. R. (2013). Pulse soliton Solutions of the modified KdV and Born- Infeld Equations,
 282 International Journal of Modern Nonlinear Theory and Applications, 2, 135-140
- 283 [13] Bogning, J. R., Djeumen Tchaho, C. T. and Kofané, T. C. (2013). Solitary wave solutions of the
 284 modified Sasa- Satsuma nonlinear partial differential equation, American Journal of Computational
 285 and Applied Mathematics, 3(2), 97-107
- 286 [14] Bogning, J. R. (2013). Analytical soliton Solutions and wave solutions of discrete Nonlinear
 287 Cubic-quintique Ginzburg-Landau equations in array of dissipative optical systems. American Journal
 288 of Computational and Applied Mathematics, 3(2), 97-105.
- 289 [15] Hirota , R. (1973). Exact N-Soliton Solution of Nonlinear Self-Dual Network Equations, J. Math.
 290 Phys.14, 805-809.
- 291 [16] Ablowitz , M. J. and larkson , P. A. (1991). Soliton, nonlinear evolution equations and inverse
 292 scattering, New York Cambridge University Press.
- 293 [17] Guch et al. (1990). Soliton theory and its application. Zhejiang: Zhejiang Science and Technology
 294 press.

295 [18] Wadati, M. (1975). Wave propagation in nonlinear lattice I. J. Phys. Soc. Jpn. 38, 673-680.
 296 [19] Wadati, M. (1975). Wave propagation in nonlinear lattice II. J. Phys. Soc. Jpn. 38, 681-686.
 297 [20] Yajima, T. and Wadati, M. (1990). Solution and its property of unstable nonlinear Schrödinger
 298 equation. J. Phys. Soc. Jpn. 59, 41- 47.
 299 [21] Shuqing Li , Lu Li, Zhonghao Li and Guosheng Zhou. (2004). Properties of soliton solutions on
 300 the cw background in optical fibers with higher-order effects. J. Opt. Soc. Am. B, 21(12), 2089-2094.
 301 [22] Nakkeeran, K. (2002). Bright and dark optical solitons in fiber media with higher-order effects.
 302 Chaos Solitons & Fractals, 13, 673-679.
 303
 304
 305