

# Hidden Markov Model Approach for offline Yorùbá Handwritten Word Recognition

Jumoke F. Ajao <sup>\*1</sup> Stephen O. Olabiyisi<sup>2</sup>, Elijah O. Omidiora<sup>2</sup> and Oladayo O. Okediran<sup>2</sup>

<sup>1</sup>Department of Computer Science, Kwara State University, Malete,

<sup>2</sup>Department of Computer Science & Engineering, Ladoke Akintola University of Technology, Ogbomosho

## Type of Article

---

## Abstract

This paper presents a recognition system for Yorùbá handwritten words using Hidden Markov Model(HMM).The work is divided into four stages, namely data acquisition, preprocessing, feature extraction and classification. Data were collected from adult indigenous writers and the scanned images were subjected to some level of preprocessing, such as: greyscale, binarization, noise removal and normalization accordingly. Features were extracted from each of the normalized words, where a set of new features for handwritten Yorùbá words is obtained, based on discrete cosine transform approach and zigzag scanning was applied to extract the character shape, underdot and the diacritic sign from spatial frequency of the word image. A ten(10) state left-to-right HMM was used to model the Yorùbá words. The initial probability of HMM was randomly generated based on the model created for Yorùbá alphabet. In the HMM modeling, one HMM per each class of the image feature was constructed. The Baum-Welch re-estimation algorithm was applied to train each of the HMM class based on the DCT feature vector for the handwritten word images. Viterbi algorithm was used to classify the handwritten word which, gave the corresponding state sequences that best describe the model. Our experiments reported the highest test accuracy of 92% and higher recognition rate of 95.6% which, indicated that the performance of the recognition system is very accurate.

**Keywords:** keywords:Handwriting Recognition, Yorùbá Corpus, Yorùbá Language, Database Schema, Database Interface

**2016 Mathematics Subject Classification:** 53C25; 83C05; 57N16

---

<sup>\*</sup>Corresponding author: E-mail: ajaofalilat@yahoo.com

---

# 1 Introduction

*The problem of handwritten Yorùbá word recognition (HYWR) has not been widely researched for a long time in spite of its potential in many applications such as document analysis, mail sorting, document archiving, commercial form-reading, office automation and so on Cheriet, Kharma, Liu and Seun (2007); Adigun, Femwa and Omidiora and Olabiyisi (2016). A few known methods have been proposed among which is Ibrahim and Odejebi (2011) who presented a system for Character Recognition using bayesian and decision tree classifiers on Yorùbá six upper case letters.*

*The possibility of adapting modern Information Technology (IT) to our specific and unique needs is motivating. Hence, in the process of developing the resources that are needed to make modern IT relevant to African languages, there is need to incorporate indigenous language into the recognition system. so as to save Yorùbá language from total extinction (Ibrahim and Odejebi, 2011). Due to differences in the nature of scripts in different languages, separate works have been done for various languages (Cheriet, Kharma, Liu and Seun, 2007). Diacritics marks are rare in English but are common occurrences in Yorùbá language. Yorùbá character is tonal, which makes its recognition more difficult than that of English language sequence of characters. Using under dots make some Yorùbá letters 'special' such as in ẹ, ọ, ẹ. One Yorùbá letter is a digraph represented as 'gb'. Several Yorùbá letters include vowel diacritical. The presence or absence of vowel diacritical indicates different meanings (Bamgbose, 1976). For example: bá (marked with an acute Accent) refers to 'meet'; ba, which is unmarked, signifies 'weave' and bà, marked with a grave accent refers to 'impinge upon'. Diacritical marking are essential to differentiate between possible meanings (Ojo, 2007).*

*The diacritical marking may be ignored in handwritten unless the words are isolated, and this introduces additional difficulty in our recognition task. As removal of any of these dots will lead to misinterpretation of the character, efficient pre-processing techniques have to be used in order to deal with these dots without removing them and changing the identity of the characters. (Falola and Genova, 2006). The diacritical marking may be ignored in handwritten unless the words are isolated, and this introduces additional difficulty in our recognition task. As removal of any of these dots will lead to a misinterpretation of the character, efficient pre-processing techniques have to be used in order to deal with these dots without removing them and changing the identity of the character. (Falola and Genova, 2006)*

*Handwriting recognition can be divided into on-line and off-line recognition according to the format of handwriting inputs: In off-line recognition, only the image of the handwriting is available, while in the on-line case temporal information such as pen tip coordinates, as a function of time, is also available (Plamondon and Srihari, 2000; Adigun, Femwa and Omidiora and Olabiyisi, 2016). Besides, the basic handwriting recognition algorithms, various post processing methods are proposed to improve the accuracy of recognition. The techniques for on-line and off-line recognition may be quite different, but the post processing methods are possibly similar for both of them (Plamondon and Srihari, 2000). Many applications require off-line HWR capabilities such as bank processing, mail sorting, document archiving, commercial form-reading, office automation, and so on (Adeyanju, Fenwa and Omidiora, 2014; Makhoul, Schwartz, Lapre and Bazzi, 1998).*

*The Yorùbá language, is spoken natively by over thirty million people in West Africa, primarily in Nigeria and in the neighbouring countries of the Republic of Benin and Togo. In Nigeria, Yorùbá speakers reside in the Southwest region in states like Ọyọ, Ogun, Ọsun, Ondo, Ekiti, Lagos, Kogi and Kwara. Yorùbá language is also spoken in the Diaspora in places like Cuba, Brazil, and the Caribbeans (Falola and Genova, 2006; Ojo, 2007). Yorùbá is a tonal language with three tones: high, mid and low. The high tone is indicated by an acute accent (á, é, ẹ́, í, ó, and ú). The mid tone is not marked and the low tone is marked with a grave acute (à, è, ẹ̀, ì, ò, ẹ̀ and ù). Some characters have dots at the bottom to indicate different tonal pronunciation. The need for inclusion of Yorùbá language in IT, to save the Yorùbá language from going to extinction has motivated this research work.*

*Yorùbá is written in a similar way to English with few differences (Amin, 2000). Yorùbá alphabet differs from English in omitting C, Q, V, X, and Z but adding Gb (one letter), Ẹ, Ọ, and Ẹ. Comparing*

Yorùbá and English sequence of characters, there are some similarities between the two Ibrahim and Odejobi (2011). Both English and Yorùbá are read and written from left to right, have capital and small letters, have spaces between the words and share some common upper case and lower case letters. Despite these similarities, there are some significant differences between the two. English alphabet comprises of twenty-six capital and twenty-six small letters, but, Yorùbá alphabet has twenty-five capital letters and twenty-five small letters. Sequences of one or more of these letters represent the basic spoken units of a word or a complete word. This sequence of letters is known as a grapheme and the sound unit it represents is a phoneme. Yorùbá alphabet can be broken down into three tiers:

- i. Tonal Tier
- ii. The Under dot Tier
- iii. The Character Tier and The diagraph

The tonal tier can be categorized into three tiers. The high-tone, the mid -tone and the low-tone. The under dot tier are the characters that carries the under dot sign. The character are set of characters that are common to both European alphabet and the Yorùbà alphabet except some few differences: these information is represented in Table 1.

Table 1: The Yorùbá alphabet

| Toner Tier                                          |    |                 |                                             |    |    |
|-----------------------------------------------------|----|-----------------|---------------------------------------------|----|----|
| High-Tone(Acute sign)<br>(á, é, ê , í, ó, ô and ú ) |    | Mid-tone<br>i j | Low- tone(grave tone)<br>è,è ,ì, ò, ò and ù |    |    |
| The Under dot Tier                                  |    |                 |                                             |    |    |
| Eẹ                                                  |    | Oọ              | Sẹ                                          |    |    |
| The Character Tier                                  |    |                 |                                             |    |    |
| Aa                                                  | Bb | Dd              | Ee                                          | Ff | Gg |
| Hh                                                  | Ii | Jj              | Kk                                          | Ll |    |
| Mm                                                  | Nn | Oo              | Pp                                          | Rr | Ss |
| Tt                                                  | Uu | Ww              | Yy                                          |    |    |

This paper focuses on Yorùbá handwritten word recognition. And it uses discrete cosine transform to extract features of Yorùbá handwritten words. Our algorithm showed a better recognition rate. The remainder of this paper is structured as follows: Section 2 presents the review of related works, section 3 describes the HMM classification process in details; Section 4 presents experimental results and conclusion is presented in Section 5.

## 2 Review of Related works

Many well known techniques used to recognize handwriting have been reported in Cheriet, Kharm, Liu and Seun (2007). Ibrahim and Odejobi (2011) presented a system for character Recognition using Bayesian and decision tree classifiers on Yorùbá Six upper case letters. Handwriting words from different writers were collected. The handwritten word collected were passed to Bayesian classifier and the decision tree algorithm was used to determine diacritic sign and under dot. 94.44% recognition rate was achieved.

El-Yacoubi, Gilloux, Sabourin and Seun (1999) designed a system to recognize unconstrained handwritten words. The preprocessed word images were divided explicitly into a sequence of segments and two feature sets were extracted from the sequence of segments. The word models were made

up of the combination of appropriate letter models and an HMM-based interpolation technique was used to combine the two feature sets. The recognition system developed considered two rejection mechanisms depending on whether or not the word image belong to the lexicon. Experiments were carried out on 4,313 French city name images real mail envelopes, and 93% recognition rate was achieved.

Arica and Yarman-Vural (2001) proposed an analytic scheme, for cursive handwriting recognition. The global parameters, such as slant angle, baselines, and stroke width and height were extracted. The Segmentation approach finds character segmentation paths by combining gray scale and binary information. And HMM was employed to label shape recognition and rank the character candidates. The estimation of feature space information and HMM ranks are combined in a graph optimization problem for word-level recognition. The performance of the system was tested using 2,000 words of the database of Lancaster-Oslo/Bergen corpus of cursive handwriting. The scheme yielded a very high recognition rate.

Femwa (2012) presented an hybrid feature extraction techniques using geometrical and statistical features for recognizing online characters. A hybridized classification model was developed to train the neural network using modified counter propagation and modified Optical back propagation learning algorithms. The results obtained showed the learning rate parameters variation had a positive effect on the network performance. The research worked on single Latin character in isolation and 96% recognition rate was achieved.

Gunter and Bunke (2003) combined three classifiers with different architectures for handwritten word recognition. A new ensemble method with several base classifiers was applied and the results of the ensemble method were compared to the results of the combination of the three classifiers. An increase of 2.98% was obtained with the best combination scheme. The authors also show that by using classical ensemble methods, such as Bagging and AdaBoost, the performance could also be increased. However, the best performance was achieved with a new ensemble method proposed by the authors, which distinguishes it from classical ensemble methods by the fact that it uses several base classifiers, rather than just a single one. The performance of the new ensemble method was 1.5% higher than the best combination of the base classifiers, 2.94% higher than the classical ensemble methods, and 4.48% higher than the best base classifier.

Jain, Duin and Mao (2000) summarized and compared some of the well known methods like template matching, statistical, syntactic or structural, neural networks used in various stages of a pattern recognition system and identified research topics and application which were at the forefront of this challenging field.

Kazim, Babak and Ehsanollah (2014) presented an offline Farsi/Arabic handwritten recognition using a contourbased method that provides rich set of discriminate characteristics to improve the recognition rate. A fast contour alignment was used to extract the feature point an a reduced lexicon based on loci features was applied on the features of binary images. The recognition system was validated on IBN SINR database which yielded recognition rate of 91.08

Koerich, Leydier, Sabourin and Seun (2002) proposed two level HMM decoding algorithm to deal with large vocabulary handwriting. The authors propose a non-heuristic fast decoding algorithm which is based on hidden Markov model representation of characters. The decoding algorithm breaks up the computation of word into two levels: state level and character level. Given an observation sequence, the two level decoding enables the reuse of character likelihoods to decode all words in the lexicon, avoiding repeated computation of state sequences. The proposed scheme yielded a better recognition results.

Ajao, Jimoh, and Olabiyisi (2012) presented a handwritten recognition system of destination address on envelopes using artificial neural network. The Back propagation algorithm was used to classify the word using a segmentation-based approach. This was deployed on different destination address on envelopes, considering thirty-six states, of Nigeria. 96% recognition rate was achieved which gave a promising result.

Impedovo, Ferrante and Modugno (2009) presented an approach for Handwritten Word Recognition based on Hidden Markov Model theory and the sliding window technique. The approach uses specific singularity markers to support the recognition phase. Different strategies for sliding window step were considered: Regular Step and Progressive Step. Experimental results shows improvements over some recognition system developed were reported in the paper.

Cheng-Liu (2009) presented a recognition system of Indian and Arabic handwritings. The paper presented some results of handwritten Bangla and Farsi numeral recognition on binary and grayscale images. For recognition on grayscale images, it proposes a process with proper image pre-processing and feature extraction. The paper justified the benefit of recognition on grayscale images against binary images. It compared some implementation choices of gradient direction feature extraction, some advanced normalization and classification methods.

Azizi, Farah and Sellami (2010) worked on Arabic recognition system using ensembles classifiers, which focused on studying the effect of fusion methods on global system performance. They used the diversity measure and individual accuracy classifier for selecting the best classifier. The best among the classifier was then used for the classification purpose. The experimental results presented were encouraging and open their perspective in the domain of classifiers selection.

Wen-Li and Mei-Huei (2015) presented normalization process for handwriting recognition with scribbling data of different resolutions collected from different devices, such as touch screens and tablets. The normalization algorithms aimed at position, scale and rotation invariant in order to standardize non-uniform handwriting results from all sorts of users. The recognition process starts with identifying the bound of a handwriting. The cropped bound is centered to the origin and then scaled to a default size without producing undesirable distortions. Image skewing is handled by sampling data image of multi-angles through rotation transformation to produce extra learning artifacts. Down-sampling is employed by mingling neighborhood pixels into blocks to improve learning and recognition speed. The empirical studies show that this proposed standardization approach can yield a high degree of accuracy.

Experiments shows that the method of Hidden Markov Model(HMM) adopted for European handwriting recognizers are not appropriate for Yorùbà handwritten word. An unconstrained Yorùbà handwriting is naturally challenging for off-line recognition systems since the words include many under dots and diacritical marks which change the meaning of the word (Makhoul, Schwartz, Lapre and Bazzi, 1998; Ibrahim and Odejobi, 2011). There is need to model the parameters of HMM that will be appropriate for Yorùbà handwritten words with correct orthography, correct tone mark and under dot in lower case letters and upper case letters.

### 3 Hidden Markov Model for Recognition

Hidden Markov Model was chosen as the classifier due to the following: it provides methods for incremental learning of new classes and it performs automatic segmentation of string. This means that new handwritings can be added to the database without recomputing the representations of all other learned handwritings. HMM has also proved effective for a number of other tasks, such as handwriting recognition and sign language recognition. Because each HMM uses only positive data, they scale well; since new words can be added without affecting the already trained HMM patterns. Rabiner (1989).

The Hidden Markov Model (HMM) is a variant of a finite state machine having a set of hidden states,  $Q$ , an output alphabet (observations),  $O$ , transition probabilities,  $A$ , output (emission) probabilities,  $B$ , and initial state probabilities,  $\pi$ . The current state is not observable. Instead, each state produces an output with a certain probability ( $B$ ).

In the training phase, the Baum-Welch algorithm was model to optimize the training data through an iterative process. a variant of the Expectation Maximization (EM) algorithm, was used to maximize the observation sequence probability  $P(O | \lambda)$  of the chosen model  $\lambda = (A, B, \pi)$ . Where parameters

$A$ ,  $B$  and  $\pi$ , denote matrix of transition probabilities, observation probabilities, and initial states probabilities. Rabiner (1989)

In the testing phase, a modified Viterbi algorithm was used to search for the corresponding state sequence that optimize model probability that matches the word given the input feature vector. In order to use HMM for recognition, an observation sequence is obtained from the test signal and then the likelihood of each HMM generating this signal is computed using the forward-backward algorithm. The HMM which has the highest likelihood then identifies the test signal using Baum-Welch algorithm and the state sequence which maximizes the probability of an observation, this is done using the Viterbi algorithm, which is a simple dynamic programming optimization procedure. Adeyanju, Ojo and Omidiora (2016)

Given a model of (Yorùbá word  $|\lambda$ ) and an observation  $P(O|\lambda)$ , how do we get an observable sequence that will maximize the model? and how do we determine the best observable sequence that will satisfy the model. Azizi, Farah and Sellami (2010) Five things that are required to solve this problem:

1.  $N$ : The number of states to represent the model
2.  $M$ : The number of distinct observable state
3.  $A_{ij}$ : The transition probability where

$$a_{ij} = P[q_t + 1 = S_j | q_t = S_i, 1 \leq i, j \leq N] \quad (3.1)$$

4.  $B_i(k)$  the observable probability

$$b_i(k) = P\{V_k \text{ at } t | q_t = S_j\} \quad (3.2)$$

5. the initial probability  $\pi$

$$\pi_i = P\{q_i = S_i\}, 1 \leq i \leq N \quad (3.3)$$

The problems required to be solved using HMM are:

1. The Evaluation problem
2. The Re-estimation problem
3. The Decoding problem

### 3.1 The Evaluation Problem

In order to apply HMM for Yorùbá word Recognition, HMM efficiently compute the model given an observation of Yorùbá word. The forward-backward algorithm was deployed to solve the evaluation problem Rabiner (1989): The Forward algorithm is obtained as follows:

Initialization:

$$\alpha_1(i) = \pi_i b_i(o_1) \quad (3.4)$$

Induction

$$\alpha_t(j) = \left[ \sum_{i=1}^N \alpha_{t-1}(i) \right] b_j(o_t + 1), 1 \leq t \leq T - 1, 1 \leq j \leq N \quad (3.5)$$

Termination

$$P(X|\lambda) = \sum_{i=1}^N \alpha_T(i) \quad (3.6)$$

where  $\alpha_i(t)$  is the partial observation sequence of the HMM Model

The backward algorithm is stated below:

Initialization

$$\beta_T(i) = 1 \quad (3.7)$$

Induction

$$\beta_t(i) = \sum_{j=1}^N a_{ij} b_j(O_t + 1) \beta_{t+1}(j) \quad t = T - 11 \leq i \leq N \quad (3.8)$$

where  $\beta_t i$  is the partial observation symbol of state  $q_t$  at time  $t-1, \dots, t$ .

### 3.2 The Training Process

The Baum-Welch algorithm was used to re-estimate the learning parameters to produce the expected model parameters that gives details representation of the word. The expected model parameters ( $A$ ,  $B$  and  $\pi$ ) generated with the extracted features, was used to train the Hidden Markov Model and the HMM model generated a transition matrix that gives the probability of the observation matrix. The Baum-Welch algorithm (Baum, Petrie, Soules, and Weiss, 1970) was used to train the Hidden Markov where re-estimation of the model parameter is done in order to get the optimal corresponding state sequences that actually gives the model. Rabiner (1989) The Baum-Welch algorithm is as follows:

$$L = \prod_{y=1}^Y P(O^y | \lambda) \quad (3.9)$$

where  $O^y$  = the  $y$ th observation sequence,  $\bar{a}_{ij}$  is the expected transition matrix and  $\bar{b}_j(k)$  is the expected observation sequence.

$$\bar{a}_{ij} = \frac{\sum_y \frac{1}{P(O^y | \lambda)} \sum_{t=1}^T \sum_{i=1}^N \alpha_{t-1}^y(i) a_{ij} b_j(o_t) \beta_t^y(j)}{\sum_y \frac{1}{P(O^y | \lambda)} \sum_{t=1}^T \sum_{i=1}^N \alpha_t^y(i) \beta_t^y(i)} \quad (3.10)$$

$$\bar{b}_j(k) = \frac{\sum_y \frac{1}{P(O^y | \lambda)} \sum_{t=1}^T \sum_{i=1}^N \delta(O_t^y = v_k) \alpha_{t-1}^y(i) a_{ij} b_j(o_t) \beta_t^y(j)}{\sum_y \frac{1}{P(O^y | \lambda)} \sum_{t=1}^T \sum_{i=1}^N \alpha_{t-1}^y(i) a_{ij} b_j(o_t) \beta_t^y(j)} \quad (3.11)$$

### 3.3 The Classification Problem

The algorithm used to carry out the classification problem is the dynamic programming techniques, which was used to get the corresponding state sequences that optimizes observation sequence given the model.

Viterbi algorithm is a dynamic programming algorithm that chooses the best state sequence which maximizes the likelihood of the state sequence for the feature vector of the observation sequence. Let  $\delta_t i$  be the maximal probability of state sequence of the length  $t$  that end in state  $i$  and produce the first observations for the given model.

$$\delta_t(i) = \max P(q(1), q(2), q(3); o(1), o(2), o(t) | q(t) = q_i) \quad (3.12)$$

Initialization:

$$\delta_1(i) = P_i b_i(o(1)) \quad (3.13)$$

$$\Psi_i(i) = 0, i = 1, \dots, N \quad (3.14)$$

Recursion:

$$\delta_t(j) = \max_i [\delta_{t-1}(i) a_{ij}] b_j(o(t)) \quad (3.15)$$

$$\Psi_t(j) = \arg \max_i [\delta_{t-1}(i) a_{ij}] \quad (3.16)$$

Termination:

$$P^* = \max_i [\delta_T(i)] \quad (3.17)$$

$$P^* = q_T^* = \arg \max_i [\delta_T(i)] \quad (3.18)$$

### 3.4 The Recognition Process

*The main procedures in the proposed recognition system consist of pre-processing stage to remove extraneous images that may affect the performance of the recognition system. The preprocessed handwritten words were subjected to feature extraction techniques to extract relevant pattern from the word, such as the under dot and the diacritic signs. The feature extraction techniques was done holistically to extract the loop, the ascender, the descender of the Yorùbá word. The extracted features were subjected to the classification algorithm. A left-right with skipping options HMM topology was used to model the Yorùbá alphabets. The multiple structure captured both characters in uppercase and lowercase letters. The recognition process uses an holistic recognition process where the handwritten Yorùbá words was captured holistically without considering the segmentation of each of the characters that make up the Yorùbá words. The descender, ascenders, the holes and hooks of handwritten Yorùbá words is captured which gave detailed representation of the word to model Yorùbá handwritten word in its real word scenario. A flat static lexicon of fifty words were generated for the lookup table created used in the recognition module.*

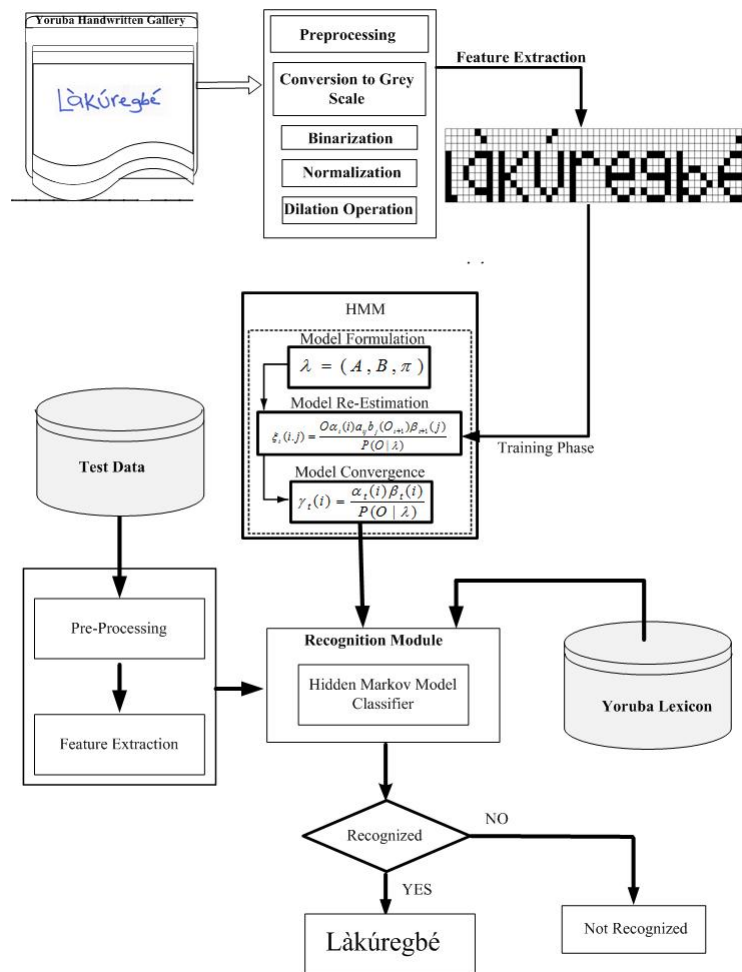


Figure 1: The framework architecture of the Recognition System

The initial parameter values are computed using the training dataset and the model parameters. The stage is to find a good estimate for the observation probability ( $B$ ). The initial estimates of the parameters are essential for proper convergence to global maximum of the likelihood function. The data is matched with each model state and the initial model parameters were extracted. The training observation cycles were segmented into states using the Viterbi algorithm. The result of segmenting each of the training sequences, for each of the  $N$  states, is a maximum likelihood estimate of the set of observations that occur within each state according to the model. The model parameters are re-estimated using the Baum-Welch re-estimation procedure. This procedure adjusts the model parameters so as to maximize the probability of observing the training data, given each corresponding model. The resulting model is then compared to the previous model by computing a distance score that reflects the statistical similarity of the HMMs. If the model distance score exceeds a threshold then the old model is replaced by the new model and the training loop is repeated. If the model distance score falls below the threshold, then model convergence is assumed and the final parameters are saved.

The skipping option was chosen to model Yorùbá Handwritten word recognition system. Since, a word can contain ordinary character or it could be any of the seven instances of vowel characters with grave accents or acute accents and an empty space unintentionally added during the course of writing. Each of the states captured different scenario that make up Yorùbá handwritten words.

The recognition module reliably recognized the handwritten medical pathology words or misclassified Yorùbá handwritten word with ambiguity. Figure 7 illustrates the basic modules in the handwritten Yorùbá word recognition system.

A lookup table was created, that is a set of handwritten words ( $U$ ) and a set of lexicon ( $V$ ) such that each element  $x$  of a set  $U$  is associated to a single element  $y$  of a set  $V$ . In this case, every element of  $V$  represents the image of a single element of  $U$  as illustrated in Figure 7.

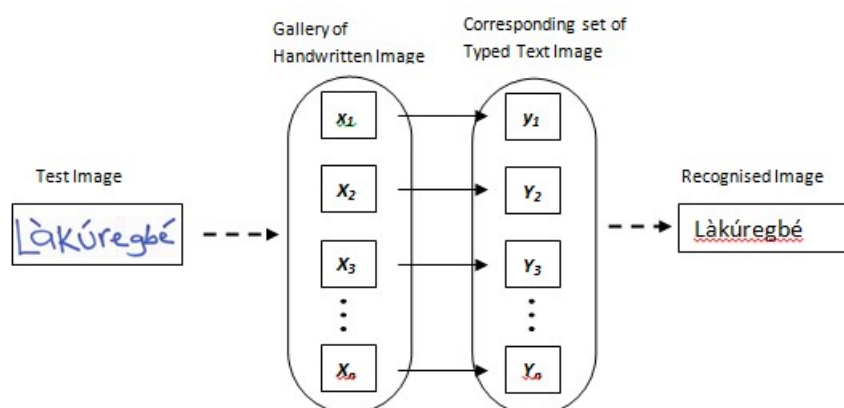


Figure 2: The block diagram of the recognition process

Algorithm to Recognize Yorùbá handwritten Word using Hidden Markov Model is as follows:

1. Define a set of Word database or class for modeling the Yorùbá words
2. Generate a random values for  $\pi$ ,  $A$  and  $B$  from the model of Yorùbá letters.
3. Initialize  $q_t = s_t$
4. For each class, collect a training data set gotten from the extracted features to train the HMM
5. Compute the observation sequence to produce the given model.
6. Based on each training, solve the estimation problem to optimize the HMM parameters.

7. Evaluate Probability of the observation sequence given the model to find the most probable path that will produce the observation given the unknown features)

### 3.5 Data Acquisition

*Fifty(50) medical pathology words were obtained from the English medical dictionary which were translated to its Yorùbá equivalent. The translated Yorùbá handwritten medical words were written by 200 literate indigenous writers, which amounts to total of ten thousand(10,000) words of medical pathology words. Each of these ten thousand(10,000) words were replicated using different resolutions, formats and sizes. The handwritten image was scanned using 300 dpi resolution, 200 dpi resolution and 100 dpi resolution using different format such as JPEG, bitmap, png and tif at different sizes. The aim was to determine the robustness of recognition system developed on various image of different format so as to determine its effects on the recognition rate, the computational cost and the convergence ratio. The scanned handwritten words were used to create the Yorùbá handwriting database.*



Figure 3: Sample handwriting of Yorùbá word Lákúregbẹ́

### 3.6 Preprocessing

The acquired data were subjected to a number of steps to make it usable in the descriptive stages of character analysis, the handwritten acquired were scanned and the scanned images were subjected to some pre-processing stages in order to extract appropriate invariant features that was used by the classifier for the recognition system. The image pre-processing stages are as follows:

**Stage 1:** Conversion of the scanned image to grayscale Initially, the samples handwritten images were in RGB format, this stage converts the true color image RGB to greyscale intensity image by eliminating the hue and saturation information in the sample handwriting. The greyscale images were converted to its binary form and the samples handwriting were normalized by dividing the dimensions of each image by 255.

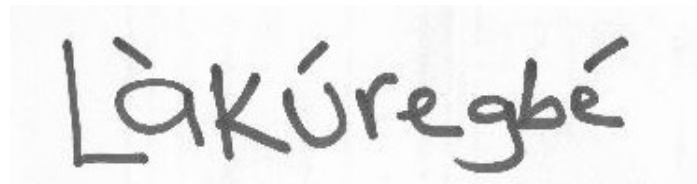


Figure 4: The Grayscale image of Làkúregbé handwritten word




Figure 5: The Binary image of Làkúregbé handwritten word

### 3.7 Feature Extraction

Discrete cosine transform is an orthogonal transform method proposed by Ahmad, Natarajan and Rao (1974). DCT has been widely applied in image processing research since it was proposed. Discrete cosine transform can be derived from discrete Fourier transform (DFT) If a function is both real and even, then its Fourier series contains only cosine terms. Various approaches to the DCT is a well-known signal analysis tool used in compression due to its compact representation power (Chadha , Vaidya and Roja, 2011). Two-dimensional DCT can be defined as follows:



Figure 6: The Binary Gradient image of *Lākúregbè* handwritten word

$$X(u, v) = \frac{2}{N} \sum_{n_2=0}^{N-1} \sum_{n_1=0}^{N-1} c(u)c(v)x(n_1, n_2) \cos \left[ \frac{(2n_1 + 1)u\pi}{2N} \right] \cos \left[ \frac{(2n_2 + 1)v\pi}{2N} \right] \quad (3.19)$$

where  $n_1, n_2, u, v = 0, 1, \dots, N - 1$ .

$x(n_1, n_2)$  represent coefficients data in original block after applying DCT.

$$c(u) = c(v) = \begin{cases} \frac{1}{\sqrt{2}} & \text{if } u = 0, v = 0 \\ 1 & \text{otherwise} . \end{cases}$$

The inverse discrete cosine transform (IDCT) can be defined as follows:

$$x(n_1, n_2) = \frac{2}{N} \sum_{v=0}^{N-1} \sum_{u=0}^{N-1} c(u)c(v)X(u, v) \cos \left[ \frac{(2n_1 + 1)u\pi}{2N} \right] \cos \left[ \frac{(2n_2 + 1)v\pi}{2N} \right] \quad (3.20)$$

DCT helps separate the image into parts (or spectral sub-bands) of differing importance (with respect to the image's visual quality). The Discrete Cosine Transform was used as feature extraction techniques that transform the handwritten image from its spatial domain to its frequency domain. it carries out the analysis of the frequency image in a zigzag scanning method to extract the peculiar features of the handwriting. A holistic feature extraction was carried out that extracts the ascender, the descender, hook, loop and diacritic sign on the word was carried out. The ascender and the descender was used to extract the shape of characters, the acute accent, the grave accent and the under dot that make up Yorùbá handwritten words were extracted. No explicit segmentation of characters was carried out. The default representation of the DCT algorithm uses  $7 \times 7$  array of integers. Yorùbá handwritten words comprises of diacritic mark on some of the vowel characters, which makes the array of integers to be extended to  $16 \times 16$  array of integers to capture the diacritic marking and the underdot on some characters.

### 3.8 Modelling Yorùbá Letters with Hidden Markov Model

Yorùbá handwritten word was represented by a 10 - states left-to-right Hidden Markov Model as illustrated in Figure 7. Ten(10) was chosen based on the formulation of the Yorùbá alphabet. The model was formulated based on the assumptions that, handwritten can contain ordinary character, character with grave accent, character with acute accent, character with under dot, character with under dot and grave accent, character with under dot with acute accent and additional empty space unintentionally added in the course of writing and additional three states were added that captured

lower case letters, upper case letters and title case letters to fully represent Yorùbá alphabet which amount to the ten left-to-right HMM . Forty(40) observation sequence was used to represent the Yorùbá alphabet, which was used to train the Hidden Markov Model. Each of the state has loop, which denotes that a state can go into itself depending on the structure of the letter. Figure 6 shows the HMM topology representation of the Yorùbá handwritten word làkùregbè.

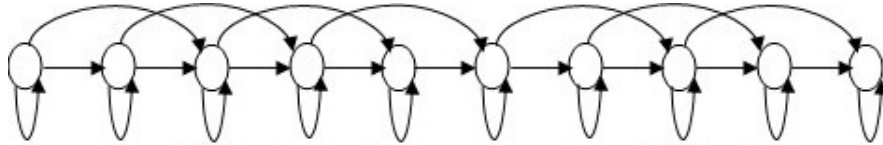


Figure 7: A 10-state Left-To-right Hidden Markov Model used to model Yorùbá alphabet

### 3.9 The Hidden Markov Model Initialization for Yorùbá word:

All these initial values were formulated:

The initial probability  $\pi_i = P\{q_i = S_i\}$

Transition matrix =  $[10 \times 10]$  matrix

Observation sequence = [40], there are 25 characters that make up Yorùbá alphabet the additional fourteen plus one observations is gotten from seven instances of the vowel characters with acute sign and seven instances of vowel characters with grave accent and the under dot, character with under dot and grave accent, character with under dot, grave accent and an empty space.

The size of the observation sequence is  $[10 \times 40]$  observations for each states of the Yorùbá alphabet model.

## 4 Experimental Results

The recognition of Yorùbá handwritten words was performed on the Yorùbá handwritten database created by the Authors. Ten thousand(10,000) medical pathology words were obtained from literate indigenous writers. The handwritten Yorùbá words were scanned using an OCR device in order to digitized it. The digitized handwriting images were subjected to some level of preprocessing to enhance the quality of the Yorùbá handwritten images. The digitized images were normalized to reduce the dimensions of the digitized image. Discrete Cosine Transform was used to extract relevant information that represents the handwritten words and this was used to train the HMM. HMM was used to classify the handwritten words. The handwritten words were stored in the database and the lexicon for each of the word was created which serves as lookup table for the handwritten words. In order to validate the YHWRS developed, handwritten word images were selected from the database created, and it was tested on the recognition module, that captured the preprocessing, feature extraction and the classification process. The test data were subjected to preprocessing, feature extraction of the preprocessed images were carried out and compared with the trained features vector. If the two feature sets are similar, it look up for the appropriate word in the look-up table and display the correspondence digital equivalent of the handwritten word if found, or brings a False Negative result if

not found. The performance evaluation metrics was carried out using the precision and the recognition rate. The precision and recognition accuracy is gotten using the formula:

$$Precision = \frac{FN}{TN + FN} \quad (4.1)$$

where FN is the False Negative, TN is the True Negative.

- The recognition rate is calculated as:

$$\text{percentage of recognition} = \frac{\text{Number of recognized word}}{\text{Total Number of Test data}} \times 100 \quad (4.2)$$

Table 2 shows the recognition accuracy with each of the handwritten words. Some percentage of the handwritten samples were used to train the HMM and the remaining handwritten words were also used to the test the YHWRS, in order to test its reliability. Table 3 shows the Recognition accuracy for open-test validation and Table 4 shows the recognition accuracy for close-test validation of the Yoruba handwritten words.

Table 2: Recognition Accuracy of the OCR Yorùbá words for lowercase letters with open-test letter words

| Handwritten Image | Train data | Test data | Recg | NotRecg |
|-------------------|------------|-----------|------|---------|
| ikó               | 2          | 30        | 28   | 2       |
| òtútú             | 2          | 30        | 28   | 2       |
| ẹfọrí             | 2          | 30        | 30   | 0       |
| agara             | 2          | 30        | 30   | 0       |
| sòbià             | 2          | 30        | 27   | 3       |
| ibà               | 2          | 30        | 29   | 1       |
| àjàkálẹ̀          | 2          | 30        | 28   | 2       |
| àrùn              | 2          | 30        | 29   | 1       |
| àtọsí             | 2          | 30        | 29   | 1       |
| ilẹgbóná          | 2          | 30        | 28   | 2       |
| sísunú            | 2          | 30        | 28   | 2       |
| alákasa           | 2          | 30        | 28   | 2       |
| segede            | 2          | 30        | 28   | 2       |
| làkúrègbé         | 2          | 30        | 30   | 0       |
| iwárápá           | 2          | 30        | 30   | 0       |

(Makhoul, Schwartz, Lapre and Bazzi, 1998; Ibrahim and Odejebi, 2011).

Table 3: Recognition of the *Yorùbá* handwritten medical pathology words of Title case

| Handwritten Image | Train data | Test data | Recog | NotRecog |
|-------------------|------------|-----------|-------|----------|
| Òtútù             | 2          | 30        | 28    | 2        |
| Èfọrí             | 2          | 30        | 30    | 0        |
| Agara             | 2          | 30        | 30    | 0        |
| Sòbìà             | 2          | 30        | 27    | 3        |
| Ibà               | 2          | 30        | 29    | 1        |
| Àjàkálẹ̀          | 2          | 30        | 28    | 2        |
| Àrùn              | 2          | 30        | 29    | 1        |
| Àtọ̀sí            | 2          | 30        | 29    | 1        |
| Ìkó               | 2          | 30        | 28    | 2        |
| Sísúnú            | 2          | 30        | 28    | 2        |
| Segede            | 2          | 30        | 28    | 2        |
| Ètẹ               | 2          | 30        | 28    | 2        |
| Ewo               | 2          | 30        | 29    | 1        |
| Ìrìndò            | 2          | 30        | 27    | 3        |
| wárápá            | 2          | 30        | 30    | 0        |
| Jẹ̀dìjẹ̀dì        | 2          | 30        | 28    | 2        |
| Làkúregbẹ         | 2          | 30        | 30    | 0        |
| Lapalapa          | 2          | 30        | 30    | 0        |
| Àgàn              | 2          | 30        | 29    | 1        |
| Alákasa           | 2          | 30        | 29    | 1        |
| Àrùnsu            | 2          | 30        | 28    | 2        |
| Àtọ̀gbe           | 2          | 30        | 29    | 1        |
| Eebi              | 2          | 30        | 30    | 0        |
| Egbo              | 2          | 30        | 30    | 0        |
| Ọ̀finkin          | 2          | 30        | 28    | 2        |
| Ogbeenu           | 2          | 30        | 27    | 3        |

Table 4: Recognition of the *Yorùbá* medical pathology words with open-test validation

| Handwritten Image | Train data | Test data | Recog | NotRecog |
|-------------------|------------|-----------|-------|----------|
| Òtútù             | 2          | 10        | 7     | 3        |
| Èfọrí             | 2          | 10        | 8     | 0        |
| Agara             | 2          | 10        | 10    | 0        |
| Sòbìà             | 2          | 10        | 8     | 2        |
| Ibà               | 2          | 10        | 9     | 1        |
| Àjàkálẹ̀          | 2          | 10        | 9     | 1        |
| Àrùn              | 2          | 10        | 10    | 0        |
| Àtọ̀sí            | 2          | 10        | 9     | 1        |
| Ìkọ               | 2          | 10        | 7     | 3        |
| Sisunu            | 2          | 10        | 9     | 1        |
| Segede            | 2          | 10        | 9     | 1        |
| Ètẹ               | 2          | 10        | 10    | 0        |
| Ewo               | 2          | 10        | 9     | 1        |
| Ìrìndò            | 2          | 10        | 6     | 4        |
| wárápá            | 2          | 10        | 9     | 1        |
| Jẹdijẹdi          | 2          | 10        | 9     | 1        |
| Jẹdojẹdo          | 2          | 10        | 8     | 2        |
| Làkúregbé         | 2          | 10        | 7     | 3        |
| Lapalapa          | 2          | 10        | 9     | 1        |
| Agan              | 2          | 10        | 9     | 1        |
| Alákasa           | 2          | 10        | 8     | 2        |
| Àrùnsu            | 2          | 10        | 8     | 2        |
| Àtògbẹ            | 2          | 10        | 8     | 2        |
| Eebi              | 2          | 10        | 9     | 1        |
| Egbo              | 2          | 10        | 8     | 2        |
| Ọ̀finkìn          | 2          | 10        | 7     | 3        |
| Ọ̀gbéenu          | 2          | 10        | 6     | 4        |

Table 5: Recognition Accuracy of the OCR Yorùbá words using close-test validation

| Handwritten Image | Train data | Test data | Recg | NotRecg |
|-------------------|------------|-----------|------|---------|
| Òtútù             | 2          | 10        | 10   | 0       |
| Èfóri             | 2          | 10        | 9    | 1       |
| Agara             | 2          | 10        | 10   | 0       |
| Sòbià             | 2          | 10        | 10   | 0       |
| Ibà               | 2          | 10        | 10   | 0       |
| Àjàkálẹ̀          | 2          | 10        | 9    | 1       |
| Àrùn              | 2          | 10        | 10   | 0       |
| Àtòsí             | 2          | 10        | 10   | 1       |
| Ikó               | 2          | 10        | 10   | 0       |
| Sisunu            | 2          | 10        | 10   | 0       |
| Segede            | 2          | 10        | 10   | 0       |
| Ete               | 2          | 10        | 10   | 0       |
| Ewo               | 2          | 10        | 10   | 0       |
| Ìrìndò            | 2          | 10        | 9    | 1       |
| wárápá            | 2          | 10        | 10   | 0       |
| Jedìjèdi          | 2          | 10        | 10   | 0       |
| Jèdòjèdò          | 2          | 10        | 10   | 0       |
| Làkúregbé         | 2          | 10        | 10   | 0       |
| Lapalapa          | 2          | 10        | 10   | 0       |
| Agan              | 2          | 10        | 10   | 0       |
| Alakasa           | 2          | 10        | 10   | 0       |
| Àrùnsu            | 2          | 10        | 10   | 0       |
| ÀtògbẹEebi        | 2          | 10        | 10   | 0       |
| Egbo              | 2          | 10        | 10   | 0       |
| Ọfinkìn           | 2          | 10        | 10   | 2       |
| Ọgbéenú           | 2          | 10        | 10   | 0       |

#### 4.1 Performance of Yorùbá HWR system with other handwritten Word Recognition System

Table 6: Performance Evaluation of Yorùbá medical pathology words with other Handwritten word Recognition using HMM and other classifier extracted from Document Analysis Journal

| Authors               | Classifier | Lexicon Size | RR   | Test Set | Database             |
|-----------------------|------------|--------------|------|----------|----------------------|
| (Bunke, 1995)         | HMM        | 150          | 98.4 | 3,000    | Words (ENG)          |
| (Mohamed, 1996)       | HMM-DP     | 100          | 89.3 | 317      | City names (Eng)     |
| (Knerr, 1998)         | HMM-NN     | 30           | 92.9 | 40,000   | LA word (FR)         |
| (Guillevic, 1998)     | HMM-K-NN   | 30           | 86.7 | 4,500    | LA Word (ENG)        |
| (EL Yacoulbi, 1999)   | HMM        | 100          | 96.3 | 4,313    | City names (FR)      |
| (EL Yacoulbi, 1999)   | HMM        | 1,000        | 88.9 | 4,313    | City names (FR)      |
| (Kim, 2000)           | HMM-MLP    | 32           | 92.2 | 2,482    | LA Word (ENG)        |
| (Freitas 2001)        | HMM        | 38           | 77.0 | 2,387    | LA Word (POR)        |
| (Oliveier Jr, 2002)   | MLP        | 12           | 87.2 | 1,200    | Month Word           |
| (Xu, 2002)            | HMM-MLP    | 29           | 85.3 | 2,063    | Month Word (FR/ENG)  |
| (Kundu, 2002)         | HMM        | 100          | 88.2 | 3,000    | Postal Word (FR/ENG) |
| (Our proposed scheme) | HMM        | 150          | 95.6 | 1,540    | Yorùbá HW database   |

## 5 Conclusion

In this paper, we applied HMM classifier to recognize Yorùbá handwritten medical pathology words. It was observed that, HMM classifier with DCT algorithm works effectively for the recognition of Yorùbá handwritten words. Tables 2, 3, 4 and 6 show the recognition accuracy with each of the handwritten words. A few number of handwritten words generated from the Yorùbá handwritten database were used to train the HMM and the remaining handwritten words were used to test the reliability of the YHWRS. Table 2 shows the Recognition accuracy for lower case letters, Table 3 shows the recognition accuracy for Title case handwritten words. It was also observed that the YWRS developed shows insignificant results in the recognition of the handwritten words using both open-test validation and close-test validation as shown in Table 4 and Table 6. Table 6 shows the performance evaluation of Yorùbá handwritten word recognition system(YHWRS) developed with other Handwritten word recognition system using HMM and other classifiers. The YHWRS developed was compared with other HWRS, and it was observed that the YHWRS achieved a recognition rate of 95.6% using 150 lexicons, with test data of 1540 handwritten word images which was validated on Yorùbá handwritten database created.

## References

Ahmad, M., Natarajan, T. and Rao, K. R. (1974). Discrete Cosine Transform, IEEE Trans. Computers, 1974, pp. 90-94.

- Chadha, A. R., Vaidya, P. P., Roja, M. M. (2011). Face Recognition Using Discrete Cosine Transform for Global and Local Features, *Proceedings of the International Conference on Recent Advancements in Electrical, Electronics and Control Engineering (IConRAEeCE) IEEE Xplore: CFP1153R-ART*.
- Adeyanju, I., Fenwa, O., and Omidiora, E. O. (2014). Effect of Non-Image Features on Recognition of Handwritten Alpha-Numeric Characters. *International Journal of Computers and Technology*, 13.
- Ajao, J. F., Jimoh, R. G., and Olabiyisi, S. O. (2012). Handwritten Address Destination Recognition using Neural Networks. *Journal of Science, Technology, Mathematics and Education*, 9(1):70–91.
- Amin, A. (2000). Recognition of printed arabic text based on global features and decision tree learning techniques. *Pattern Recognition*, 33(8):1309–1323.
- Arica, N. and Yarman-Vural, F. (2001). An overview of character recognition focused on off-line handwriting. *IEEE Trans. Systems Man Cybernet*, 31(2):216-233.118.
- Awal, A., Mouchere, H., and C., V.-G. (2010). A hybrid classifier for handwritten mathematical expression recognition. In *Document Recognition*, page 10. IEEE.
- Azizi, N. and Farah, N. (2012). New dynamic ensemble of classifiers selection approach based on confusion matrix for arabic handwritten recognition. *2012 International Conference on Multimedia Computing and Systems IEEE*, 14(2):308-313.
- Azizi, N., Farah, N., and Sellami, M. (2010). Off-line Handwritten Word Recognition System using Ensemble of Classifier Selection and Fusion. *Journal of Theoretical and Applied Information Technology*, 14(2):141–150.
- Bamgbose, A. (1976). *Yorùbá Orthography*, Ibadan University Press, pp. 15-27.
- Cheng-Liu, L. (2009). A new benchmark on the recognition of handwritten Bangla and Farsi numeral characters. *Journal of Pattern Recognition*, 42(12):3287-3295.
- Cheriet, M., Kharm, N., Liu, C., and Seun, C. (2007). *Character Recognition Systems: A Guide for Students and Practitioners*. John Wiley. 119
- El-Yacoubi, A., Gilloux, M., Sabourin, R., and Seun, C. (1999). An HMM-based approach for off-line unconstrained handwritten word modelling and recognition. *IEEE, TPAMI*, 21(8):752–760.
- Falola, T. and Genova, A. (2006). The Yorùbá Transition: Values and Modernity. *Journal of Asian and African Studies*, 45(6):576–577.
- Femwa, O. (2012). Development of a writer-independent online handwritten Character Recognition using modified hybrid neural network. PhD thesis, Ladoke Akintola University, Ogbomoso, Department of Computer Science and Engineering, Faculty of Engineering and Technology.
- Adeyanju, I. A., Ojo, O. S., and Omidiora, E. O. (2016). Recognition of Typewritten Characters Using Hidden Markov Models. *British Journal of Mathematics & Computer Science* 12(4): 1-9.
- Adigun, J. O., Femwa, O. D., Omidiora E. O. and Olabiyisi S. O. (2016). Optimized Features for Genetic Based Neural Network Model for Online Character Recognition. *British Journal of Mathematics & Computer Science* 14(6): 1-13.

- Awaidal, S. M. and Mahmoud S. A. (2016). Automatic Check Digits Recognition for Arabic Using Multi-Scale Features, HMM and SVM Classifiers. *British Journal of Mathematics & Computer Science* 4(17): 2521-2535.
- Fenwa, O., Omidiora, E., and Fakolujo, O. (2012). Development of a feature Extraction Technique for Online Character Recognition System. *Innovative Systems and Design Engineering*, 3:10–23.
- Gunter, S. and Bunke, H. (2003). Ensembles of classifiers for handwritten word recognition. *International Journal of Document Analysis and Recognition*, 5(2):224–232.
- Heutte, L., Paquet, T., Moreau, J., Lecourtier, Y., and Olivier, C. (2000). A structural/ statistical feature based vector for handwritten character recognition. In *Pattern recognition letters*, volume 19, pages 629–641, North-Holland.
- Ibrahim, A. and Odejebi, O. (2011). A System for the Recognition of handwritten Yorùbá Characters. In *AGIS 2011*, Obafemi Awolowo University, Ile-Ife, Nigeria. AGIS.
- Impedovo, S., Ferrante, A., and Modugno, R. (2009). HMM Based Handwritten Word Recognition System by Using Singularities. *12th International Conference on Document Analysis and Recognition*, pages 783–787.
- Jain, R., Duin, R., and Mao, J. (2000). Statistical Pattern Recognition-A review. *Pattern Recognition*, 22(1):4–27.
- Kahan, S., T., and Baird, H. (2009). On the Recognition of Printed Characters of Any Font and Size. *Pattern Analysis and Machine Intelligence, IEEE transaction*, 9(2):274–288.
- Koerich, A., Leydier, Y., Sabourin, R., and Seun, C. (2002). A hybrid large vocabulary handwritten word recognition system using neural networks with hidden Markov Models. *Internal Journal of Document Analysis and Recognition*, pages 99–104.
- Makhoul, J., Schwartz, R., Lapre, C., and Bazzi, I. (1998). A Script-Independent Methodology for Optical Character Recognition. *Pattern Recognition*, 31(9):1285– 1294.
- [34]Ojo, O. (2007). The Yorùbá Transition: Values and Modernity. *Journal of Asian and African Studies*, 54(2):151–152.
- Omidiora, E., Adeyanju, I., and Femwa, O. (2013). Comparison of Machine Learning Classifiers for Recognition of Online and Offline Handwritten Digits. *Computer Engineering and Intelligent Systems*, 4(13):2222–2863.
- Plamondon, R. and Srihari, S. (2000). On-line and Off-line handwriting recognition. *IEEE transactions on pattern analysis and Machine Intelligence*, 22(1):63–84.
- Rabiner, L. (1989). A tutorial on hidden markov models and selected applications in speech recognition. volume 77 of *Proceedings of the IEEE*, pages 257–285.
- Verma, R. and Ali, J. (2012). A-Survey of Feature Extraction and Classification Techniques in OCR Systems. *International Journal of Computer Applications and InformationT echnology*, 1(3):2278–7720. 122
- Wozniak, M., Grana, M., and Corchedo, E. (2014). A survey of multiple classifier systems as hybrid systems. *Information Fusion, Science Direct*, 16:3–7.

Yi-Lu, M. and Hong, G. (2000). *Automatic Feature Selection an hybrid statistical approach*. *Pattern Recognition*, 34.

Kazim, F., Babak N. A., and Ehsanollah, K.(2014) . *A fast and accurate contour-based method for writer-dependent offline handwritten Farsi/Arabic subwords recognition*. *IJDAR*, pages:17:181203

Wen-Li, W., and Mei-Huei, T. (2009). *A Normalization Process to Standardize Handwriting Data Collected from Multiple Resources for Recognition*. *Elsevier*, pages :61:402 409.

Zhou, X., Wang, D., and Liu, C. (2009). *A robust approach to text line grouping in online handwritten Japanese documents*. *Pattern Recognition*, pages 2077–2088. 123.