

Hydrostructural Pedology, new scientific discipline allowing for physical modelling of ‘green water’ dynamics in the soil-plant-atmosphere system

Summary

Using a new paradigm of soil characterization and modeling in agro environmental sciences, named hydrostructural pedology, we were able to show that the “green water” concept of agronomists corresponds exactly to the pedostructural water concept which was physically defined in this paradigm. The water in the pedostructure of soils is composed of two types of water, named micro and macro, nested one in the other. They are differentiated by their chemical potential related to their position in the pedostructure: inside primary aggregates or outside of them in the interpedal space. A fundamental physics of the pedostructural water could be developed within this new paradigm. Finally, the soil medium can now be considered as the location in which the free water (named also blue water), coming from surface (rainfall, irrigation ...) and going down by gravity through the macro pore space of the soil, is partially absorbed by the pedostructure, and becomes then the ‘green water’ of the soil. Soil green water is in fact the soil water reserve available to plant roots and subsequently transpired by the plants into the canopy. The soil-water model Kamel, built according to this new paradigm, is the only model able to physically simulate the opposite dynamic cycles of these two kinds of water (blue and green) within the soil-plant-atmosphere system, their exchanges and equilibrium states according to time, at each depth of the pedon. Important implications about strategy of soil-water characterization, mapping and modeling are given for sustainable development and management of agricultural zones.

Introduction

Recently [1], the International Soil Reference and Information Center (ISRIC) defines three kinds of water: “From the perspective of crop production, rainwater may be split in green, blue and white components:

- *Green Water* is the water infiltrating into the soil, taken up by roots, used in photosynthesis and transpired by the crop;
- *White Water* is intercepted and directly evaporated by the crop canopy and the ground surface;
- *Blue Water* is made up from run-off to rivers and deep percolation to aquifers that finds its way to rivers indirectly.”

The green water and blue water concepts were presented before as a new paradigm by Falkenmark and Rockström in a 2006 article [2] entitled: “~~The New Blue and Green Water Paradigm: Breaking New Ground for Water Resources Planning and Management~~”

38 The green water in eco- or agro-systems can certainly be compared to the blood in animals:
 39 an operative component of the system. The blue water, on the other hand, is free water
 40 flowing by gravity through the macro-porosity of the soil and without interaction to the
 41 passage other than that of being partially absorbed by the clayey plasma within the soil
 42 structure. However, although these concepts have been well known and used in agronomy for
 43 some fifteen years, no one has yet provided the material and conceptual means to measure
 44 and model the dynamics of these two components of water in the soil. Actually, a major issue
 45 in the existing soil-water modeling is the lack of having a quantitative modeling approach
 46 that considers the natural hierarchical organization of the soil medium (i.e. soil structure).
 47 Thus, these soil water models are not able to 1) differentiate the different kinds of water
 48 present and acting in the soil medium organization; (2) provide the representative parameters
 49 that characterize the soil structure and its hydraulic functioning (i.e. have hydrostructural
 50 "physical" parameters instead of empirical parameters that have no physical meaning); and
 51 they have not the ability (3) of coupling the biological and geochemical processes in soils
 52 with the hydrostructural behavior of the soil medium (i.e. quantitative understanding of the
 53 impact of agro-environmental practices on the soil behavior); and (4) of coupling and
 54 integrating results from the local scale of processes in the soil medium (primary peds and
 55 pedostructure) to the upper hierarchical scales in the natural environment system (field, soil
 56 mapping unit).

57 Face to this challenge, Braudeau and Mohtar (2009) claimed **that distinguishing different**
 58 **kinds of water within the soil matrix organization is impossible without a change in soil**
 59 **water physics paradigm that recognizes this matrix organization and its structure** [3].
 60 They proposed a new approach of the soil water physics wherein the REV concept of the soil
 61 medium is replaced by the *SREV concept* (Structural Representative Elementary Volume)
 62 that, contrary to the REV, takes the soil structure and its hierarchical organization into
 63 consideration. A new paradigm of the soil description and modeling, named hydrostructural
 64 pedology [4, 5, 6], emerged from this approach, and the question to be asked now is whether
 65 the green water and blue water of the soil can be identified and quantified, and whether their
 66 respective dynamics within the soil-plant-atmosphere system (called also 'critical zone') can
 67 also be modeled.

68 **Theory**

69 *The hydrostructural pedology paradigm*


70 The new paradigm proceeds from the application of the systemic approach to soil science [7];
 71 it addresses not only the organization of soils in the landscape (soil mapping) but also,
 72 innovatively, the hierarchical internal organization of the "soil medium". The important first
 73 results were the establishment of the basic concepts of the new discipline [8] (Fig.1):
 74 ~~pedostructure, primary peds, soil hydrostructural properties,~~ and the *concept of SREV*
 75 coming from application of the systemic approach to soil organization. At the same time, a
 76 new set of descriptive variables was established to quantify the hierarchical organization of
 77 the soil, as depicted in Fig.1, with the three nested levels of organization of the pedon: *soil*
 78 *horizon, pedostructure and primary peds.* These variables are said "systemic" because they
 79 are defined according to the systemic approach, as opposed to "non-systemic" variables

currently used in soil physics and defined according to the concept of REV. Thus, the new systemic paradigm imposes the exclusive use of this set of variables in all equations of the hydrostructural soil functioning, and these equations are valid for all types of soil.

Figure 1: External and internal hydro-functional scale levels of the soil organization

The 4 hydrostructural functions of the pedostructure

The pedostructure, then, is like the motor element of the soil. The only cause of swelling and shrinkage of the soil horizon is the pedostructure volume change according to the

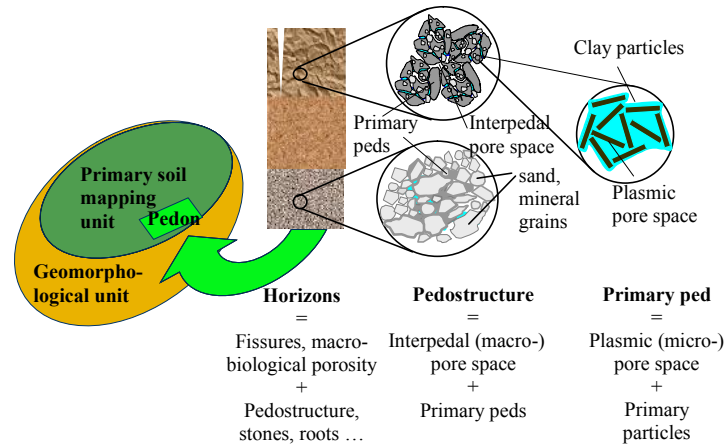

87

pedostructural water content. Thus, characterizing the hydro-structural behavior of a soil horizon in the laboratory is to characterize the hydrostructural properties of its pedostructure, whatever the percentage of volume occupied by the latter in the horizon.

The use of the new hydro structural pedology paradigm allowed discovering the exact equations of state of the pedostructure that characterize the thermodynamic and hydrostructural equilibrium between the two types of pedostructural water (W_{mi} and W_{ma} , internal and external to primary peds in the pedostructure) [9]. This, in turn, led to the establishment of theoretical equations of the four pedostructural characteristic curves that fully represent the hydrostructural properties of soils [9, 10, 11]; these are:

- The soil water retention curve, $h = f(W_{ps})$: the tension of the soil water expressed in suction pressure (hPa), function of the pedostructural water content (W_{ps}) (in kg water/kg soil structure) [9, 10]
- The pedostructural shrinkage curve, $\bar{V} = f(W_{ps})$: Pedostructure specific volume (dm^3/kg) as function of the pedostructural water content [9].
- The pedostructural hydric conductivity curve, $k_{ps} = f(W_{ps})$ (dm/s) as function of the pedostructural water content [11].
- The pedostructural swelling curve, $\bar{V} = f(t)$, swelling with time by absorbing free water [11].

These four curves are dependent on the thermodynamic interaction between the water molecules and the surface charges of soil particles, both organic and mineral, constituting the non-rigid structure of the soil medium. The new apparatus, named TypoSoil® [12], which measures accurately and simultaneously in laboratory the two first hydrostructural characteristic curves of the pedostructure, namely, the shrinkage curve and the water retention curve, allowed us validating the theoretical equations of these curves [9,10, 13]. It was recently put available on the market (2014). The corresponding pedostructural parameters, characteristics of both curves, are then accurately determined by fitting the measured curves with their physical equation [14]. Regarding the other two curves, hydric conductivity and swelling curves, the specific equipment required for their measurement exists, but the characteristic parameters of these curves cannot be determined without a preliminary determination of the hydrostructural parameters of the sample, using TypoSoil®.

These 4 hydrostructural functions of the pedostructure are taken in charge by the soil-water model Kamel® [11, 15] which uses their theoretical equations for modeling the soil-water dynamics within the internal organization of a pedon (Representative Elementary Volume of a soil profile in a Soil Mapping Unit). Other information about the horizons of the pedon is of course needed, including the percentage of pedostructure in each horizon, the thickness of each horizon, the percentage of other organizational volumes such as macropores, roots, stones, and so forth [11].

A specific laboratory at the hearth of the new discipline

Hydrostructural Pedology involves the "mechanistic" articulation between three scientific fields of investigation: the field, the laboratory and the geo-referenced hydro-functional soil mapping units. The latter being the base layer of the NEO-GIS (Natural Environment Organization-GIS), a modeling platform containing all georeferenced information for interdisciplinary studies of the soil-plant-atmosphere system.

A hydrostructural pedology laboratory, with its specific equipment including TypoSoil®, is then required (Fig. 2) to determine the pedo-structural characteristics of each soil horizon, to organize the data in relation to field operations (soil sampling, mapping, experiments) and with the georeferenced hydro-functional soil mapping units [16].

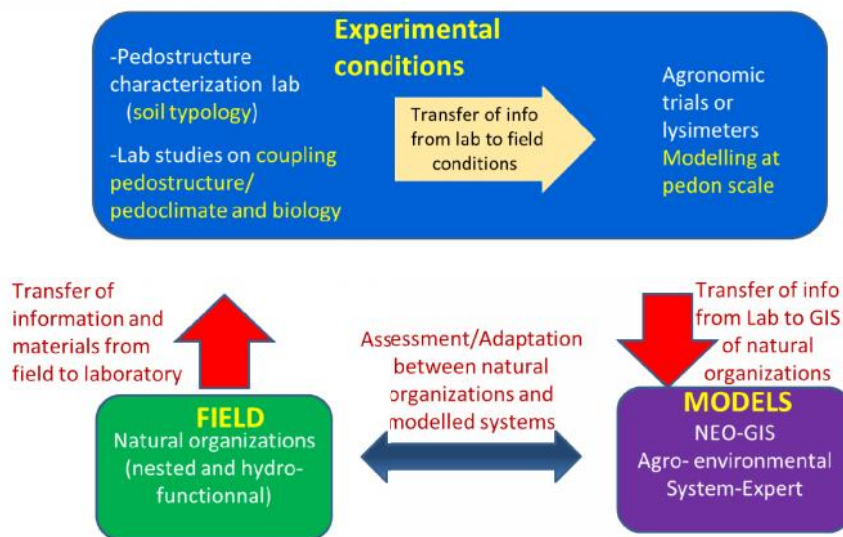


Figure 2. The hydrostructural pedology laboratory (in blue) in relationship with the field (sampling) and the soil mapping (Neo-GIS) for the soil plant atmosphere system modelling

A precise methodology of measurement for the four characteristic curves and the determination of their parameters are fully described in [14]. These parameters are the **pedostructural parameters** of a soil horizon required by Kamel[®] to model the hydrostructural functioning of a pedon at its different scales of functioning and at every depth in soil. They constitute the basic information about the soil identity and its behavior that must be stored in soil data bases and soil GIS according to the hydrostructural pedology paradigm.

Implications in agro-environmental sciences

A new discipline taking place beside hydro-pedology and hydrology

In the new paradigm of hydrostructural pedology (Fig. 3), the soil is considered and modeled as an organized physical medium (Fig. 3a), made of solid particles, surrounded by water and surrounded by air, and always near its physical equilibrium state (thermodynamic and hydro-structural). Soil is the location of transformation of the *free water* (rainfall at soil surface, infiltrated in macropores, water table) into *green water*, which is the soil water retained by the *pedostructure*, taken up by roots (along with the *pedostructure* shrinkage), then used in photosynthesis and transpired by the crop (Fig. 3b). It is clear now that the *pedostructural water* is exactly the *green water* of agronomists. The green water content in soil is, in fact, the water content of the pedostructure, W_{ps} , at a local point in the soil. It constitutes the control variable governing the hydrostructural equilibrium state of the soil [11, 15].

The model Kamel[®], as it is based on the pedostructure and SREV concepts, is the only soil-water model today able to model distinctively the different kinds of soil water and their respective dynamics; and in particular, the pedostructural water (W_{ps} , green water) in a SREL (Fig. 3a) at any depth of soil. Thus, pedostructure and pedostructural water (green water) become, through hydrostructural pedology, the two essential objects of study and

investigation, common to agro-eco-environmental sciences. This is because, in the systemic paradigm, a primary soil mapping unit is represented by its pedon (SREV of the soil unit) and the pedon, in turn, by its horizons as characterized by their pedostructure.

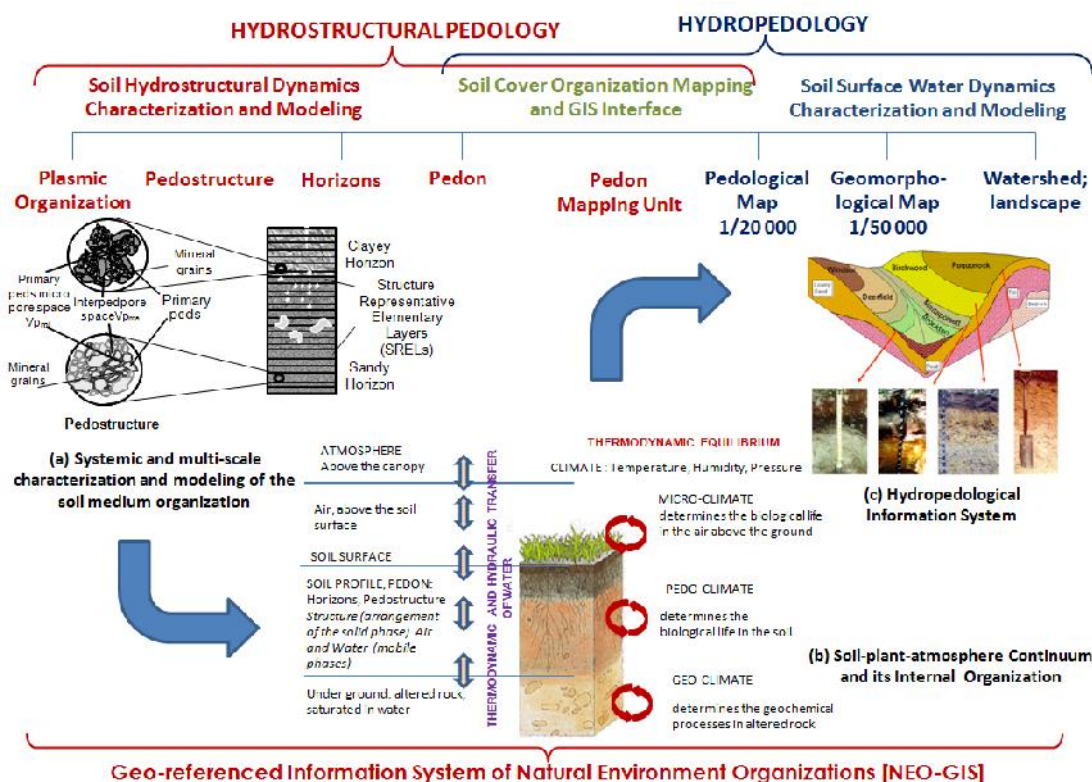


Figure 3. Hydrostructural Pedology: a new discipline in earth sciences. [16]

In Figure 3, we can see the place occupied by the hydrostructural pedology beside the two well-known disciplines of hydro-pedology and hydrology (Fig. 3c) [16]. The final product of these disciplines is the NEO-GIS (Natural Environmental Organization), provided they are working together according the systemic approach and represent, locally the multi-scaled natural environment. This is a GIS of agro-environmental data (NEO-GIS), of which its first basic layer is a hydro-functional soil mapping unit: that is a systemic geo-referenced information system of a soil map built according to the hydrostructural pedology methodology. Thus, Kamel® can use the NEO-GIS information to model both cycles of water (green and blue) in each soil mapping unit and then integrate the results over the entire mapped zone.

Two kinds of modeling the water-soil couple in the natural and in the societal environment

Figure 4 presents a general and ideal picture of the activities of characterization and modeling in agro-environmental sciences for a sustainable development of a country that could exist in

fact, if the new paradigm of hydrostructural pedology is accepted and put in practice [17, 18]. It shows the two environmental modeling cycles, global and local, which are necessary in principle, to formulate all aspects of the nature-society relationships. On the right side of the figure the cycles are illustrated: the assessment (inventory, mapping), hydro-functional characterization and hydro dynamics modeling (simulation of fluxes, processes, productions) of the soil-plant-atmosphere organization. Data obtained in these operations are necessarily at the basis of any program of installation and/or optimal and sustainable management of agro- or ecosystems which are simulated on the left side of the modeling cycles, in which all

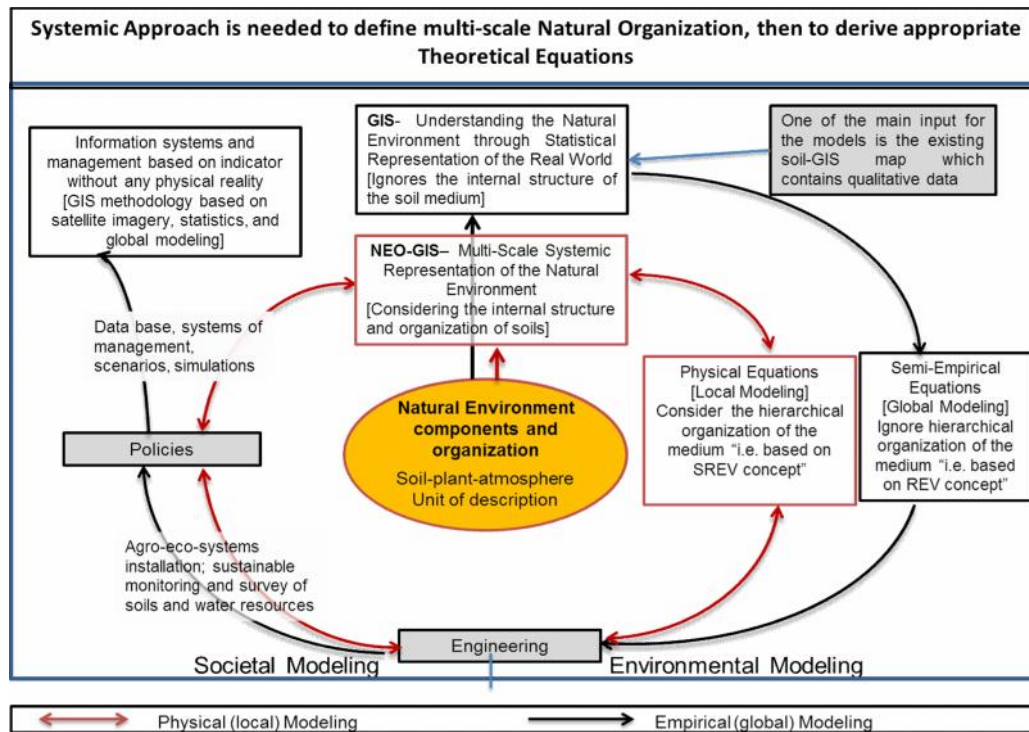


Figure 4. The dual, local and global, cycle modeling of the water-soil couple in the natural environment (ecosystem) and in the societal environment (agro-ecosystems) [17]

societal constraints have to be taken into account.

However, the global modeling cycle (black line) corresponds to the current modeling approach of the agro eco-environment (based on the REV concept) while the local modeling cycle (red two-way arrows) is not yet installed or put into practice. So the agro-environmental modelling today cannot be other than a global approximation of the reality at the soil surface, contrarily to the *local cycle* (red two-way arrows) which is a *physical, systemic and mechanistic modelling according to hydrostructural pedology paradigm*.

Conclusion: the new global challenge of agro-environmental sciences

In fact, according to Figure 4, we can see that the two modeling cycles differ already from the beginning due to the representation of the internal organization of the physical medium (soil, water, atmosphere) which is fundamentally different in the two cases:

- one, represented by the red solid line, recognizes the hierarchical organization of the medium and can be named “local-scale modeling” because it takes reference to the soil structure;

- the other, represented by the black line, conceals any internal organization by using the concept of Representative Elementary Volume, and thus cannot be other than a “global scale modeling approach” where any reference to the structure of the medium is eliminated.

Therefore, only the red cycle (red two-way arrows), where relationships and transfers of scale are based on physical and systemic approach, makes it possible a return to the reality of the natural organization, and thus for a true estimation of the real evolution or changes of this natural organization (for example, ecosystems).

So the great challenge today should be the installation of this physical modeling cycle for linking the two approaches, local and global. The NEO-GIS, specific product of the physical and systemic (red) cycle modelling, should be the support of information on which the global (statistical) modeling has to be based for a good estimation of the reality. This implies the development of the hydrostructural pedology paradigm around the world, to allow the universal development of the NEO-GIS for the optimal and sustainable management of soils and water in any agricultural or ecological zone or region.

References



- [1] ISRIC, World Soil Information. (2016) The Green Water Concept. <http://www.isric.org/content/green-water-concept>. Accessed April 2016.
- [2] Falkenmark, M., & Rockström, J. (2006). The New Blue and Green Water Paradigm: Breaking New Ground for Water Resources Planning and Management. *J. of Wat. Res. Plan. and Manag.* 132:129-132.
- [3] Braudeau, E., and Mohtar, R.H. (2009). Modeling the soil system: Bridging the gap between pedology and soil-water physics. *Global Planetary Change Journal*, 67 : 51-61
- [4] Braudeau, E. (2015). Modélisation systémique du couple eau-sol : la pédologie hydrostructurale, *Res-Systemica*, 13 : 1-95. ISSN 1762-5890
- [5] Braudeau, E., Assi, A.T. and Mohtar, R.H. (2016). Pédologie hydrostructurale. Collection *Système Terre – Environnement* ; Edit. A. Mariotti. ISTE Editions, 188 p. (e-book) ISBN : 978-1-78405-140-2
- [6] Braudeau, E., Assi, A.T. and Mohtar, R.H. (2016). Hydrostructural Pedology. Part of the *Focus Series in Earth System – Environmental Sciences*. (English) Wiley. 186pp. ISBN: 978-1-84821-994.

- 239 [7] Braudeau, E., Assi, A.T. and Mohtar, R.H. (2016). The systemic approach applied to
240 pedology. *In Hydrostructural Pedology, chap. 3.* John Wiley & Sons, Inc.
241 DOI: 10.1002/9781119318514.
- 242 [8] Braudeau, E., Assi, A.T. and Mohtar, R.H. (2016). The General System: General Model
243 of Scientific Disciplines Related to the Study and Management of Natural Areas. *In*
244 *Hydrostructural Pedology, chap. 4.* John Wiley & Sons, Inc.
245 DOI: 10.1002/9781119318514.
- 246 [9] Braudeau, E., Assi, A.T., Boukcim, H., and Mohtar, R.H. (2014). Thermodynamic
247 formulation of the pedostructure water retention and shrinkage curves. *Front. Environ.*
248 *Sci.* 2:4. doi: 10.3389/fenvs.2014.000
- 249 [10] Braudeau, E., Hovhannissian G, Assi A.T. and Mohtar R.H. (2014). Soil water
250 thermodynamic to unify water retention curve by pressure plates and tensiometer.
251 *Front. Earth Sci.* 2:30. doi: 10.3389/feart.2014.00030
- 252 [11] Braudeau, E., Mohtar, R.H. (2014a). A framework for soil-water modeling using the
253 pedostructure and structural representative elementary volume (SREV) concepts.
254 *Front. Environ. Sci.* 2: 24. doi:10.3389/fenvs. 2014.00024
- 255 [12] www.typosoil.com and TypoSoil user manual for soil hydrostructural characterization.
256 (pdf) *ResearchGate* doi: 10.13140/2.1.2605.3920
- 257 [13] Assi, A.T., Accola, J., Hovhannissian, G., Mohtar, R.H. and Braudeau, E. (2014).
258 Pedostructure characterization through measurement and modeling of the soil
259 moisture characteristic curves. *Front. Environ. Sci.* 2:5.
260 doi:10.3389/fenvs.2014.00005
- 261 [14] Braudeau, E., Assi, A.T. Mohtar, R.H. (2016). Methods for Determining the
262 Characteristic Parameters. *In Hydrostructural Pedology, chap. 9.* John Wiley & Sons,
263 Inc. doi: 10.1002/9781119318514.
- 264 [15] Braudeau, E., Mohtar, R.H., El Ghezal, N., Salahat, M. and Martin, P. (2009). A multi-
265 scale "soil water structure" model based on the pedostructure concept. *Hydrology and*
266 *Earth System Sciences Discussions*, European Geosciences Union, 2009, pp.1111-
267 1163. (pdf at [<bioemco-00396487>](#))
- 268 [16] Braudeau, E., Assi, A.T. Mohtar, R.H. (2016). Emergence of a new scientific discipline,
269 hydrostructural pedology *In Hydrostructural Pedology, chap. 5.* John Wiley & Sons,
270 Inc. doi: 10.1002/9781119318514.
- 271 [17] Braudeau, E., Mohtar, R.H. (2014). Integrative environmental modeling, *Encyclopedia*
272 *of agricultural, food, and biological engineering*, 2^e edition, Taylor and Francis: New
273 York, 1-6. Online <http://dx.doi.org/10.1081/E-EAFE2-120049111>. doi:10.1081/E-
274 EAFE2-120049111