

A Machine Learning Algorithm Based on Inverse Problems for Software Requirements Selection

By Ali SEVER

A Machine Learning Algorithm Based on Inverse Problems for Software Requirements Selection

Ali Sever

Department of Computer ~~information~~Information Systems

Pfeiffer University

Charlotte, NC 28109 USA

ABSTRACT

This paper describes the software requirements prioritization task and provides a systematic approach to determine what needs to be included in the next release of a software product. Minimizing the total cost of adding a new feature in the next release and maximizing overall customer satisfaction are contradictory objectives. In this paper, first, an adaptive multi-objective prioritization model is discussed. Then we describe how discrete inverse problems ideas can in fact be formulated to obtain a smooth local "Added Degree of Importance" (ADI) function of client requirements which could be used to classify and prioritize the software requirements for next release. The numerical implementation of the proposed model with a case study on software requirements selection shows the effectiveness of the multi-objective inverse model (IM) approach. The proposed model have been compared with some of the recent relevant models. Main future of the model is that it has been designed by the assignment of a real score for each of the requirements unlike just classification provided in the literature.

Keywords: Software requirements prioritization; multi-objective machine learning algorithm; next release problem; inverse problems; machine learning

1. INTRODUCTION

Software has become ubiquitous in modern society and software companies must avoid any development disruptions. Many disruptions in software development can be traced back to requirements related issues. Therefore, software requirements selection has been the subject of active research for many years. We can observe exponential growth of complexity in software systems in the last decade. Moreover, software products have to be developed with time and cost restrictions. Thus, one of the first issues which have to be taken care of by the software companies is to determine the requirements for the next release so that the highest number of customers get satisfied with a minimum cost for the company. In most of the cases, it is not possible to develop all the features suggested by the client. So prioritization of requirements is an important task in software engineering with agile methodologies. In these methodologies, the software product is developed by generating releases which have to be produced in short iterative sprint cycles. A new set of requirements is proposed for each iteration. In this context, the challenge of Software Engineering is to define which requirements should be developed taking in consideration several competing factors (priority for different clients with different importance, development effort, cost restrictions). In this case we use a multi objective inverse approach

algorithms as it can manage conflicting objectives without the artificial adjustments included in traditional single objective optimization methods.

The complexity and extension of modern software systems have been increased and the software products have to be developed in time and cost restrictions. Therefore, software development companies have to efficiently satisfy large sets of requirements by minimizing the production efforts (in time and cost). In fact, in most cases it is not possible to develop all the new requirements suggested by clients [1] and [2]. Software requirements optimization problem is especially important with the incremental approaches of software development [3], [4], and [5].

Software requirements are not independent of each other and the modeling the interdependencies of the requirements is very challenging task in software systems development ([2] and [3]). When we have a problem of choosing next requirement to implement from a set of requirements, it is desirable to work with a number of known requirements that has been already implemented as core part of software since the software requirements may be very large and its interaction structure too complicated [6].

2. PROBLEM DEFINITION

The aim of this project is to present an efficient approach for software requirements evaluation and scoring. It is a crucial part for software project development because the highest possible number of stakeholders must be satisfied while keeping the cost at a minimum [5]. The high margin of accuracy in the system is very necessary and quite beneficial for stakeholders. This paper analyses the software requirements data and provides a framework which prioritize the requirements in two phases as shown in Figure [1]. This project focuses on the use of knowledge discovery methods thru inverse machine learning algorithms with soft computing methods to suggest a solution.

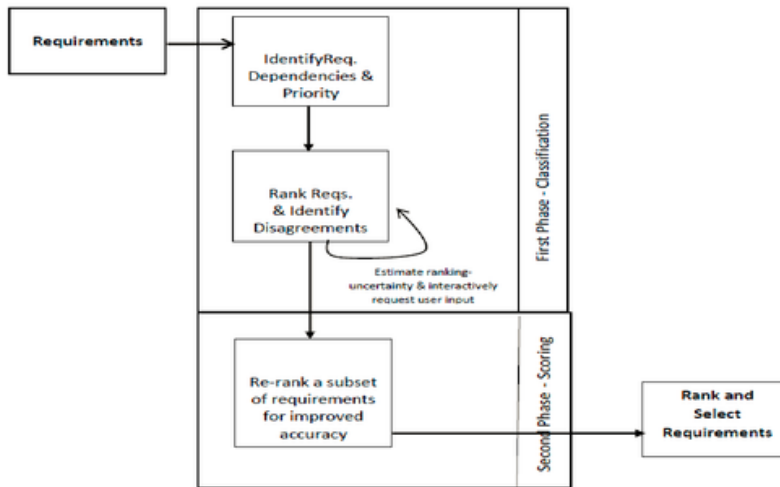


Fig. 1. Two phases of IML Model

Objective of the process must be to maximize the number of stakeholders who are satisfied and minimize the cost for the company. To minimize loss from the company's point of view, the company needs a choice lead with respect to what to give endorsement of the advance for implementation and what not to. A software requirement's attributes are considered by developers before a choice is taken in regards to its implementations. The literature review indicates that the following attributes need to be considered: requirements' dependencies, requirements' quality, stakeholder's preferences, development risk, development cost, business value, resources, and time restrictions.

Evaluating a requirement is an important challenge in software engineering. In some mid-sized projects, we can get quite a large number of requirements [7]. It is a very complicated task to decide whether signing off on a requirement for implementation would be beneficial or not [8]. The aim of every method is to classify the bad requirements with the good ones. It becomes very hard for the manager to decide just by inspecting the application form with some details [9], [10]. Therefore, software requirements prioritization is a very challenging step in software development.

The advancement in the information technology has led companies and developers to electronically store all the details of the requirement. This led to the urgency of making a system which can automate software requirements prioritizing decision so that the stress on managers can be reduced and efficiency could be improved. There are lots of methods which have been proposed and covered in the literature ([11], and [12]) using supervised and unsupervised learning. Most of these methods have used different classifying techniques with reasonable accuracy but no one has explained the details of the classification procedures. As it plays a crucial role in the prioritizing procedures so there must be a proper justification of the approval and rejection of a specific requirement.

Similar problems have been previously studied by a number of researchers in the domain of the reconstruction of classification ([13], [14], [15], [16], [17], [18], [19], and [20]). But these studies did not go beyond classification. In this study, we associate each requirement with a real score which gives richer interpretation. It enables managers to take effective decision and prioritize the requirements.

3. MAIN ANALYSIS

As we implemented the algorithm in a multi-objective decision support system framework, the parameter recovery of our proposed Inverse Machine Learning (IML) model, described below, is established with respect to the quality of the ADI parameter in each experiment. In this study, we did use the Aggregated Degree of Importance (ADI) indicators in our study and compare the results with other recently other recently published papers. Our model measures the aggregated degree of importance indicator of each requirement with respect to the two objectives which are low development cost and high overall clients' satisfaction. Note that requirement interactions are taken into consideration in the IML model as well.

IML is based on a non-linear learning function. In most models, the time to train the data is relatively long and also susceptible to local minimum traps. But this can be removed or mitigated by doing multiple rounds and picking the best learned model. ~~We use~~ We use "createDataPartition" function in "caret" R-package to split original data into training data and testing data by informing the ratio of training data. The package ~~make~~ makes training process for complex regression and classification problems easier for users. We built a model for software requirements prior ¹⁶ on as described in Algorithm 1 by using our IML algorithm. As indicated below we randomly select 80% of the data as training data, and the other 20% of the data as testing data.

15

Formatted: Font color: Black

Formatted: Normal, Tab stops: 1.7", Left

Formatted: Font: Not Italic, Font color: Black

Formatted: Font color: Black

Algorithm 1:

```

1:  $RIR \leftarrow \text{generateRandomInitialRequirements}(R_{\text{training set}})$ 
2:  $ADI \leftarrow \emptyset$  (Initialize the ADI function)
3: while not stop condition satisfied do
4:   for  $i = 1$  to  $R\_Size$  do
5:      $x_{target} \leftarrow R_i$ 
6:     /* Select 80 random requirements from R from R.
7:      $x_{r1} \neq x_{r2} \neq \dots \neq x_{r80}$  */
8:      $x_{r1}, x_{r2}, \dots, x_{r80} \leftarrow \text{select random requirements (R)}$ 
9:     for each requirements in  $x_{training}$  do ( $\sigma = \frac{1}{n} g_{\alpha} \left( \frac{K}{n} \right) F$ )
10:       $\sigma_{training}[r] \leftarrow g_{\alpha}[x_{r1}, x_{r2}, x_{r80}]$ 
11:    end for
12:     $\sigma_{trial} \leftarrow \text{evaluateIndividual}(\sigma_{trial})$ 
13:     $R_i \leftarrow \text{IM}(\sigma_{target}, \sigma_{trial})$ 
14:  end for
15: end while
16:  $ADI \text{ function} \leftarrow \sigma_{target}$ 
17: for  $x_{target} \neq x_{trial}$ 
18:   if  $ADI[x_{trial}] < ADI[x_{trial+1}]$ 
19:      $temp \leftarrow ADI[x_{trial}]$ 
20:      $ADI[x_{trial}] \leftarrow ADI[x_{trial+1}]$ 
21:      $ADI[x_{trial+1}] \leftarrow temp$ 
22:   end if
23: end for
24: return  $x_{target}$ 

```

In the proposed IML supervised model, we iteratively use the randomly selected training data to predict a target function. The basic and detailed frame work for the IML model is provided in Figure 2 and Figure 3 respectively. In IML supervised learning we predict an outcome based on a set of inputs provided by the stakeholders in the data file. The target function σ (ADI), the undetermined part that we need to learn from data, ADI is determined by solving an inverse problem involving similar software requirements on the next release of agile development. Therefore the value of ADI indicator σ returns known software requirements when substituted into Eq. (1). That is, each software requirement has a corresponding ADI

Formatted: Normal, Space Before: 0 pt, Tab stops: 1.7", Left

Formatted: Font: (Default) Arial, 10 pt, Font color: Black

Formatted: Normal, Justified, Tab stops: 1.7", Left

Formatted: Normal, Space Before: 0 pt, Tab stops: 1.7", Left

5
indicator which can be used to find approximate a new set of software requirements for the next release [8].

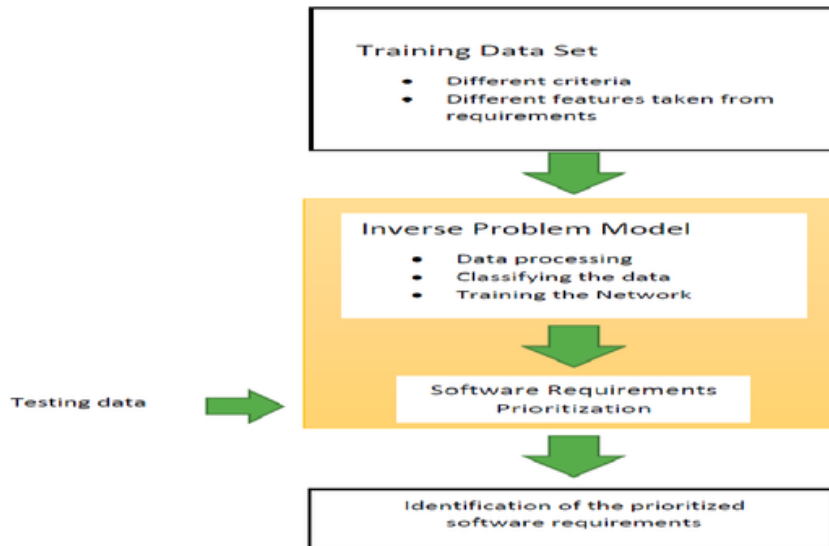


Fig 2. Basic Architectural framework of IML Model

Formatted: Centered

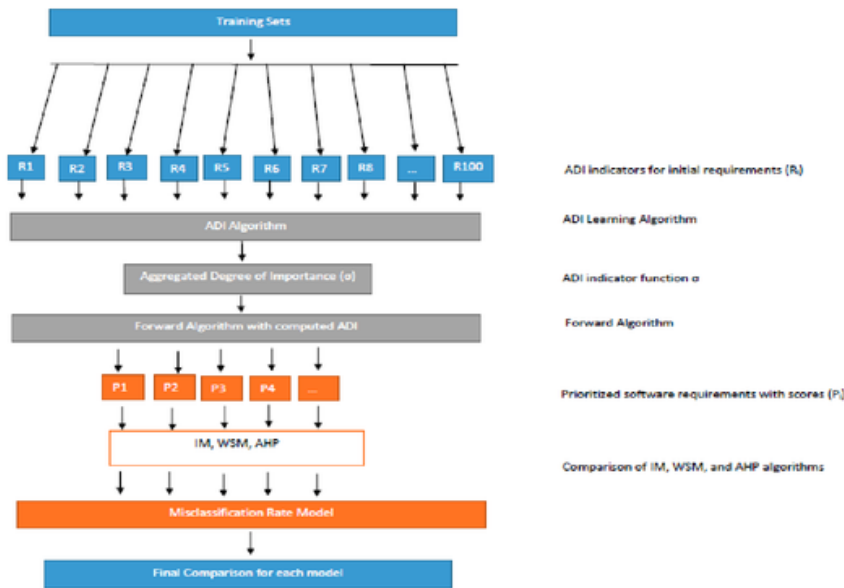


Fig. 3. Detail Architectural framework of IML Model

In the next release problem, one has to answer the question of “how to identify which requirements should be developed and delivered taking into consideration multiple complex factors and assuming that a relationship between a clients’ requirements and some of its attributes exists”. To achieve this sufficiently early in software development, it is essential to count on a solid model that can allow early detection of disruptions to the software development. The problem of producing best possible requirements can be translated into a suitable supervised inverse problem. The applied tool that we consider is based on the use of discrete version of adaptive machine learning approach in which a network of software requirements consists of interconnecting any pair of requirements by means of some links. The problem of discovering the prioritized software requirements of all the possible software requirements from a collection of implemented requirements for the next release problem can be seen as a type of inverse problem, analogous to those arising in tomography, but in a discrete form. Chung and Bernstein’s work [21] led to a key result in the domain of discrete inverse problem which proves the uniqueness of weights (or connectivity) under certain monotonicity conditions. This problem may be considered as an inverse problem of finding the $\sigma = \sigma(x) > 0$ in

$$Af = F \quad (1)$$

where X and Y be two Hilbert spaces in $\mathbb{R}^2$, $Af = \nabla \sigma \nabla f$, $A: X \rightarrow Y$ a linear bounded operator, and $F \in X$, σ is a reconstruction of ADI of the software requirements function. The solution $u(x, y)$ is given for $x \in X$, $y \in Y$, and $cl(X) \cap cl(Y) = \emptyset$. The formulation of Eq. (1) is given in [22] and we refer reader to it for detailed derivation. In Eq. (1), u is the software requirements for the next release problem. That is what we are trying to determine in X based on known implemented requirements in subset of Y . A value of σ is required before Eq. (1) can be used. ADI indicator is determined by solving an inverse problem involving similar software requirements on the same underlying. Therefore ADI indicator is that the value

of σ yields known software requirements when substituted in to Eq. (1). Hence, for each software requirements, there is a corresponding ADI indicator, and one such value can be used to determine the best possible approximation of a software requirements [22].

The linear inverse problem associated to (1) can be stated as "Recovering the function f satisfying the eq. (1), given A and F ". In general, this problem is ill-posed. One may achieve existence and uniqueness by introducing the generalized solution $\hat{f}$ defined as

$$\min_{f \in X} \|Af - F\|_Y^2 \quad (2)$$

Answer to the question of existence of the generalized solution f depends on the condition $TF \in \text{Range}(A)$, where T is the projection on the range of operator $\hat{A}$. Since the generalized solution f does not depend continuously on the F , so is not known, but only a noisy $F_\sigma \in Y$ is given, where $\|F - F_\sigma\|_Y \leq \sigma$, one may use well known regularization model to find a solution depending continuously on the data by replacing (2) with the following

$$\min_{f \in X} \{\|Af - F_\sigma\|_Y^2 + \alpha \|f\|_X^2\}, \quad (3)$$

and

$$f_\sigma^\alpha = (A^*A + \alpha I)^{-1}A^*F_\sigma \quad (4)$$

where $\alpha > 0$.

An important issue is the crucial choice of the regularizations parameter α as a function of the noise. The reconstruction error

$$\|f_\sigma^\alpha - f\|_X \quad (5)$$

must be made small by selecting proper α as a function of the noise level σ . By assuming that the generalized solution exists we may end up with the following measuring tool for learning process

$$\|Af_\sigma^\alpha - TF\|_Y = \|Af_\sigma^\alpha - f\|_Y \quad (6)$$

which will be used in our analysis of learning. Here notice that the generalized solution may not exist.

Notice that we can easily extend this to the case of a noisy operator $A_\sigma : X \rightarrow Y$ where

$$\|A - A_\sigma\| \leq \sigma,$$

and $\|\cdot\|$ is the operator norm. To deal with the problem of learning in the framework of ill-posed inverse problems we have to define a direct problem. Also the nature of the noise σ in the context of machine learning is not clear. First, we need to show how to deal with the problem of learning in the ill-posed inverse problem setting. To do this, we have to define a direct problem by means of suitable operator $A : X \rightarrow M \subset X$ such that

$$(Af)(x) = \langle f, X_M \rangle_Y,$$

where K is the Riesz type kernel of X . Since K is bounded, A is a bounded linear operator as well [15]. That is simply

$$(Af)(x) = f(x) \quad \forall x \in M, f \in X,$$

It is easy to check that

$$\frac{1}{n} \sum_{i=1}^n (f(x_i) - y_i)^2 = \|A_x f - y\|_2^2$$

Therefore the estimator function f_σ^α is the Tikhonov regularized solution of

$$A_x f = F. \quad (7)$$

This is easy to show by considering the operator $A_x: \mathcal{H} \rightarrow \mathbb{R}^n$ defined by $(A_x f)_i = f(x_i), i = 1, \dots, n$ and

$$L(F, f(x_i)) = \sum_{i=1}^n (y_i - f(x_i))^2 \quad (8)$$

In such a way that

$$\|A_x - y\|_n^2 = \frac{1}{n} \sum_{i=1}^n (F_i - f(x_i))^2 \quad (9)$$

where the norm is $1/n$ times the Euclidean norm on $\mathbb{R}^n$ and $y = (y_1, \dots, y_n)^T$. This shows that the solution f_σ^α of the minimization problem (4) with the function (8) is equal to the Tikhonov regularized solution of the linear discrete inverse problem $A_x f = y$.

Now one can define the explicit form of the solution f_σ^α as follows:

$$f_\sigma^\alpha(x) = \sum_{i=1}^n \alpha_i K(x, x_i), \quad \sigma = (K + n\alpha I)^{-1}y, \quad (10)$$

where I is identity, K is the kernel defined by $(K)_{ij} = K(x_i, x_j)$, $y = A^*F$ and $\alpha = (\alpha_1, \dots, \alpha_n)^T$.

The parameter α is used to better control stabilization of the inversion operation in (10). This problem is not stable. By following the generalizations approach provided in [22], we may define

$$f_\sigma^\alpha(x) = \sum_{i=1}^n \alpha_i K(x, x_i), \quad \sigma = \frac{1}{n} g_\alpha \left(\frac{K}{n} \right) F \quad (11)$$

where $g_\alpha: M_n(\mathbb{R}) \rightarrow M_n(\mathbb{R})$. Notice that $M_n(\mathbb{R})$ represents the set of $n \times n$ matrices with real entries. Since this inverse problems is "ill-posed", the choice of α can very much affect the sensitivity of computations. A better approach is used in [22] to think of ADI function σ as a function rather than a

constant. An inverse problem of best requirements prediction is to determine the expected client requirements by implemented client requirements in the previous releases. The model presented below uses multiple requirement selection criteria displayed in Table 4. If necessary, other criteria mentioned in literature can be incorporated. The main difference of the proposed model from the traditional requirements selection models is that the ADI indicator approximates the ADI indicator parameter around the implemented requirements, and requirements with ADI indicator are picked for the next release. In this study, we propose a multi-objective decision support system presented in Figure 4 and 5 for software requirements selection for next release problem based on a machine learning regularization of an inverse problem.

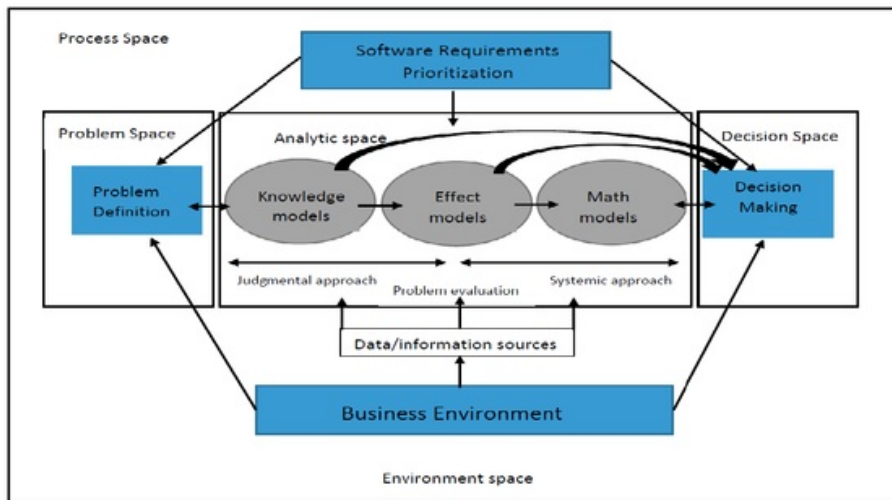


Fig. 4. A general approach of requirements evaluation using mathematical modeling

Figure 4 show the general approach that is followed before assessing the IML method. The training dataset which consist of different features and attributes about a requirement like technical precedence, conflicting priorities, stakeholder priorities- are fed to the network, before the data is processed (line 1-line 8 in Algorithm 1).

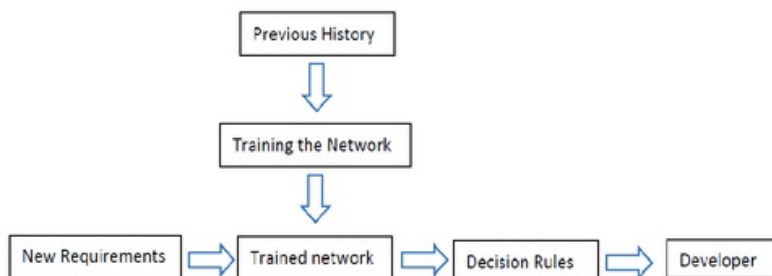


Fig. 5. Core architecture of the system

For computational reasons, we suggest to approximate a nonlinear problem by a linear one so that we may split the inverse problem into two parts. First part is a simpler, ill-posed problem (an integral equation with a Riesz-type kernel) problem and the second part is a well-posed problem. This way we can control the propagation of errors due to the ill-posedness.

$$(\alpha I + \Theta) \sigma(y) = A^*F \tag{12}$$

Let $A^*F(y) = \int_{\Omega_k} F(x)/|x - y|^2$, $y \in Y$ for some regularization parameter $\alpha > 0$. To solve this Fredholm integral equation of first kind with Riesz kernel, we use the Tikhonov regularization model described in [9].

4. PROPOSED SOFTWARE SYSTEM

The aim of every method is to classify the bad requirements with the good one. It becomes very hard for the software manager to decide just by inspecting the requirement form with some details. A variety of soft computing methods are being adopted for it. Svahnbergan and Goreschek in 2010[23] used GA to program the models. In 2014 Sagrado & Aguila[24] and Svensson & Groschek[25] in 2011 used NN for prioritize the requirements, which gives reasonable accuracy rates. Kumari and Shrinivas [26] in 2013 used adaptive neuro-fuzzy models for the analysis of software requirements system and shows its significance as compared with other techniques. There is indeed a need of an automatic system which can assist the developers to help them in requirement approval. As the modern business deals with lots of complexity like rapidly changing situations, sudden crises, managers are trying to assist additional tools to help them in predicting and managing the situation effectively. Hence soft-computing methods like neural network, fuzzy, genetic and their hybridizations like, adaptive neuro fuzzy are being used efficiently. These methods are being used for clustering, modeling, forecasting, and classifying the available data. The aim of the study is to develop a requirements prioritizing system using inverse machine learning algorithms developed here so that all requirements are prioritized and implemented based on multiple criteria as part of a system. The component diagram of the system is shown in Fig. (6).

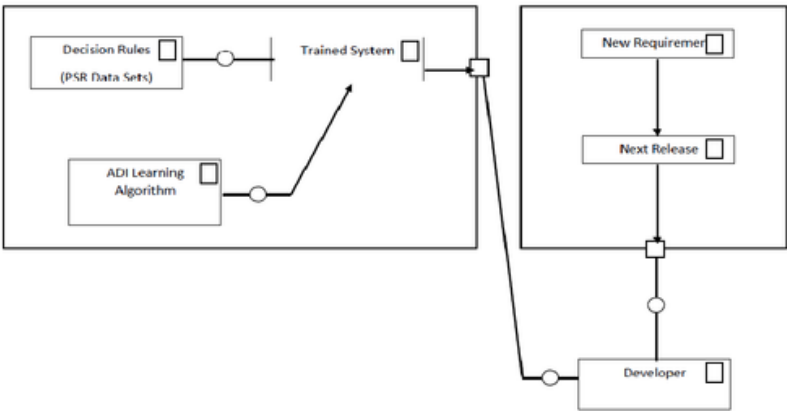


Fig. 6. Component diagram

The whole sytem is depicted in Fig. 7. The first phase of the whole system is the business understanding and converting this knowledge into a software requirement prioritization problem definition.

The data preparation phase may include some specific activities to make sure data is ready for implementation phase and this may be performed in an iterative fashion. Attribute selection needs to be performed at this level. In the phase of modeling, the inverse problem techniques iteratively solved to predict the best ADI indicator function. At the evaluation phase, we built a required model that satisfies the key objective of software requirements prioritization and decision on the software requirements prioritization results should be reached. The last phase is the deployment where model converted to a functional framework in a way that is useful to the stakeholders ([23]).

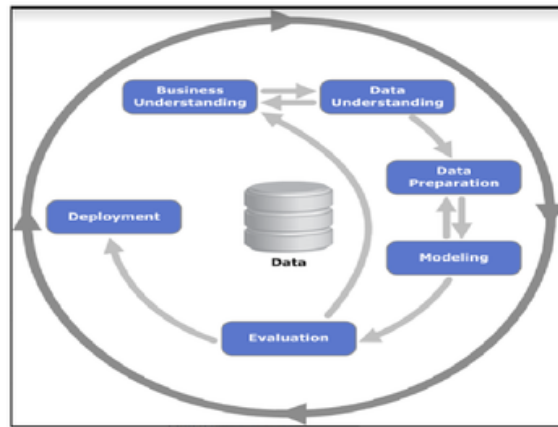


Fig. 7. Business model diagram

Knowledge discovery is finding the patterns from a large set of requirements and extracting useful knowledge and information from it. It involves discovering patterns form the large set of requirements using different mathematical models. It is formally the intersection of Machine learning (ML) and artificial intelligence with statistics and data base system. There are different mathematical models available like Neural networks, fuzzy, genetic algorithm, support vectors along with their hybridizations extract knowledge from the data bases ([27], [28], [29]). These soft computing methodologies are widely accepted for classification, clustering and predictions.

5. RESULTS AND DISCUSSION

We start describing the different parameters such as number of requirements assigned scores for each of the requirements assigned by the stakeholders. Then we show the applicability of the approach that we used in our experiments. Notice that these parameters may be changed without too much modification in our experiments. First we used 100 software requirements which is reasonable for concept of proof. We then associated a real score between 1 and 10 for each of the requirements for each stakeholder. As we described, 80% of the requirements data was used for training as the 20% of the data was used for the

6

Formatted: Font

Formatted: Space After: 10 pt, Line spacing: Multiple 1.15 ll, Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

testing purposes. Real scores may be changing from increment to increment. These scores are shown in Fig 8.

Formatted: Font: (Default) Arial, 10 pt



Fig. 8. Relationship between average client weights and requirements

The main model of IML is tree ensembles but it differs from it as it assigns a real score for each leaves. That gives us a better understanding of the requirements with real scores. This was achieved in two steps- as described below. Regularization is used internally by IML for parallel execution of the training model. All experiments were done on a 3 GHz Intel Core i7-960 processor with 16GB memory running Windows 10.

22

Formatted: Font: (Default) Arial, 10.5 pt

Formatted: Justified

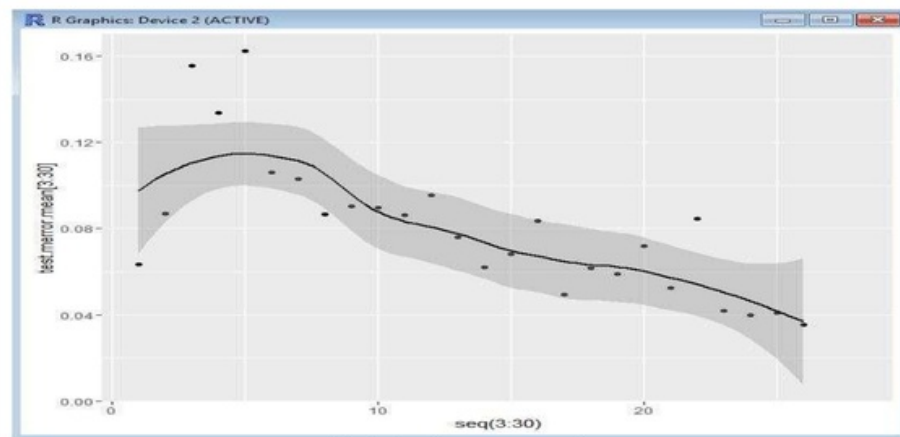


Fig. 9. Iterations vs error rate

The IML way of solving the problem will split the input dataset into training data and test data. The IML package will build and use the train data and it also uses the test data to find the accuracy with which it can predict the priority status for those inputs. This incremental learning approach makes the adaption to new evidence possible instead of starting from scratch each time. ~~Therefore~~Therefore, one has to decide when to stop iteration. For this ~~purpose~~purpose, we used a commonly adapted approach of stopping at the iteration where we start recognizing that performance is not improving. The matching error rate is the ratio of wrong match to the total number of matches. As the number of iterations increases the error rate is going to converge to a constant. This is what has been represented in the above graph where the error tend to converge to a constant values after 30 iterations (Fig. 9).

To improve the ~~model~~model, we divide the IML method approach into two phases. First, we classify our data set quickly without any parameter adjustment in algorithm 1 (Fig 10). Once we divide the requirements into two categories, we adjusted the ADI indicator to achieve greater accuracy by solving the direct problem with the predicted indicator.

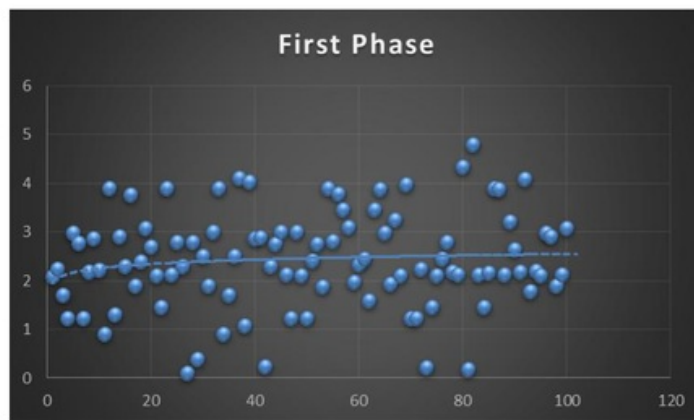


Fig. 10. First phase – Classification

The requirements with assigned real scores are prioritized for increased accuracy in the second phase by using the ADI indicator parameter around the implemented requirements (Fig. 11).

14

Formatted: Space After: 10 pt, Line spacing: Multiple 1.15 ll

Formatted: Normal

Formatted: Justified, Space After: 10 pt

Formatted: Font color: Auto

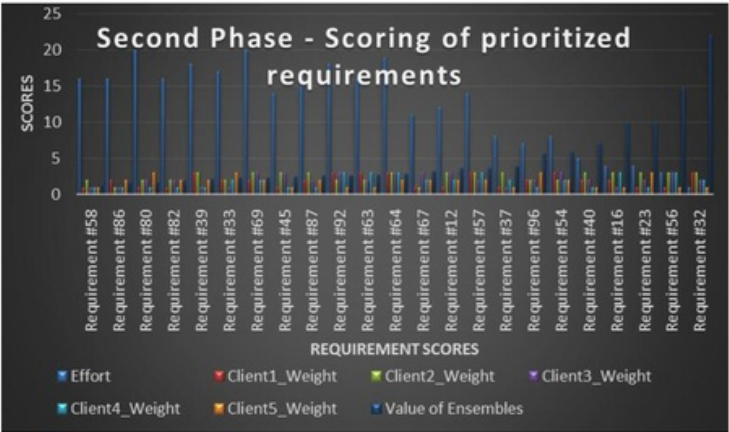


Fig. 11. Second phase – Prioritized requirements for next release problem with scoring

To verify effectiveness of suggested IML model for requirements prioritization in mid-sized systems, we have implemented and compared the results of running the IML model with MWS and AHP models. We compare our model IML with the AHP and WHS multi-criteria decision-making methods for requirements prioritization in the Table 1. Misclassification rate for each set of requirements for each model indicates that proposed IML algorithm performs much better. We also compared the accuracy of the models with or without classification in Table 2. The accuracy of IML is higher than the accuracy of AHP and WHS with classification. On the other hand, without classification, accuracy of IML is almost same as AHP, but lesser than WHS.

Formatted

Formatted: Font: (Default) Arial, 10 pt

Table 1. Performance analysis of the improved IM, AHP, and WHS models for software prioritization

Description		R ²	MSE	RMSE
IML	Training	0.9717	0.009	0.0951
	Testing	0.7105	0.0648	0.2543
AHP	Training	0.8991	0.0312	0.1766
	Testing	0.7953	0.0315	0.1775
WHS	Training	0.9082	0.0271	0.1646
	Testing	0.6596	0.0779	0.2792

??????????????

Comment [UÇ1]: Table must be placed here

Formatted: Left

Table 2. Accuracy

Decision class	Method	Accuracy	Coverage	Real Accuracy
YES	IML	0.978	0.946	0.925
	AHP	0.952	0.932	0.957
	WHS	0.962	0.992	0.954
NO	IML	0.633	0.740	0.468
	AHS	0.644	0.850	0.823
	WHS	0.862	0.890	0.767
All Classes (YES + NO)	IML	0.964	0.935	0.901
	AHS	0.961	0.942	0.932
	WHS	0.958	0.987	0.945

Table 3. Learning time

Method	Learning time	Size of requirements
IML	801 seconds	100
AHP	616 seconds	100
WHS	647 seconds	100

Table 3 shows the learning time of each model. One can see that the learning time for AHP and WHS is shorter than for IM. The results demonstrates demonstrate that the IML method is reliable and it could be used for requirements prioritization problem. In Table 4, we listed the four attributes used in our experiments: dependencies, stakeholder preference, cost, and implementation difficulty.

Table 4: The classification of factors relevant to facility location.

Requirement Attributes	Data type
Dependencies	Real Score
Stakeholder Preferences	Real Score
Cost	Real Score
Implementation Difficulty	Real Score

Even though the obtained results are promising and indicate that it performs well, the implementation could be improved in a number of ways. Some of those improvements may be an increasing number of software requirements and the software requirements attributes used in IML, adding an intermediary step between phase 1 and 2 to the IML to improve classification of requirements, and a better way of gathering input from stakeholders for prioritization. Therefore, future work should pay closer attention to making system modular and flexible. The implementation of IML should be converted to an expert system by fully optimizing the whole process.

21 Formatted: Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

12 Formatted: Not Highlight

Formatted: Font color: Auto, Not Highlight

Formatted: Not Highlight

Formatted: Font: (Default) Arial, 10 pt, Not

7 Formatted: Justified, Space After: 10 pt, Line spacing: Multiple 1.15 ll, Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Formatted Table

28 Formatted: Normal

5. CONCLUDING REMARKS AND FUTURE WORK

In this study we presented a new approach based on inverse problems and machine learning to solve a software requirements selection problem of software engineering. Our model is different than the traditional classification models since we associated each requirementsrequirement with a real score. This new multi-phase approach is a promising model for the software requirements prioritization problem shown by the experimental results of the proposed approach.

Although we have some promising preliminary results, this is definitely the beginning of more general mathematical/theoretical studies. Also, we intend to test our algorithm with different types of software requirements and/or parameters. We think this study implies a new method of software design. Therefore, our future goal is to design and build an expert system with distributed and real time characteristics. This analytical engine can be used to identify the most important requirements in prioritized format.

REFERENCES

- [1] Holbrook EA, Hayes JH, Dekhtyer A, Li W (2013) A study of methods for textual satisfaction assessment. *Empir Softw Eng* 18:139-176.
- [2] Bjarnason E, Wnuk K, Regnell B (2012) Are you biting off more than you can chew? A case study on causes and effects of overscoping in large-scale software engineering. *J Inf Softw Technol* 54:1107-1124.
- [3] Jantunen S, Lehtola L, Gause DC, Dumdum UR, Barnes RJ (2011) The challenge of release planning. In *Software product management (IWSPM), 2011 Fifth International workshop. IEEE*, pp 36-45.
- [4] Li C, Akker M, Brinkkemper S, Diepen G (2010) AN integrated approach for requirement selection and scheduling in software release planning. *Requir Eng* 15:375-396.
- [5] J. del Sagrado, I.M. del Aguila, F.J. Orellana, Requirements Interactions in the Next Release Problem, in: *Proc. Of Genetic and Evolutionary Computation Conference (GECCO 2011)*, 2011, pp. 187-188.
- [6] Aasem, M., Ramzan, M., & Jaffar, A (2015) Analysis and optimization of software requirements prioritization techniques. *International conference on information and emerging technologies (ICETET)*, IEEE Computer Society, 1-6.
- [7] Chomal, V., Saini, J. R. (2016) A Parameters - based Approach for Requirement Prioritization. *Journal of Science and Technology*. Vol.5 No.1, 2016, ISSN: 0975-5446.
- [8] Wnuk K, Regnell B, Berenbach B (2011) Scaling up Requirements Engineering – Exploring the Challenges of Increasing Size and Complexity in Market-Driven Software Development. *Requirement Eng. Found Softw. Qual. Lect. Notes Comput Sci* 6606:54–59.

- [9] Barney S, Aurum A, Wohlin C (2008) A product management challenge: creating software product value through requirements selection. *J Syst Archit* 54:576–593.
- [10] Svahnberg M, Goreschek T, Feldt R, Torkar R, Saleem SB, Shafique MU (2010) A systematic review on strategic release planning models. *Inf Softw Technol* 52:237–248
- [11] Babar, I. B., Ramzan, M., & Ghayyur, S. A. K (2011) Challenges and future trends in software requirements prioritization. *International conference on computer networks and information technology 2011*, 319-324
- [12] Daneva, M., & Herrmann, A (2008) Requirements prioritization based on benefit and cost prediction: a method classification framework. *Press 34th Euromicro conference software engineering and advanced applications*, IEEE computer society, 240-247.
- [13] Palma, F., Susi, A., Tonella, P (2011) Using an SMT solver for interactive requirements prioritization. *Proceedings of the 19th ACM SIGSOFT symposium and the 13th European conference on foundations of software engineering ACM*, 48-58.
- [14] Racheva, Z., Daneva, M., Herrmann, A., & Wieringa, R.J. (2010). A conceptual model and process for client-driven agile requirements prioritization. *Fourth international conference on research challenges in information science (RCIS)*, 287-298.
- [15] Tonella, P., Susi, A., & Palma, F (2012) Using Interactive Genetic Algorithm for Requirements Prioritization. *2nd International Symposium on Search Based Software Engineering*.
- [16] Tonella, P., Susi, A., Palma, F (2013) Interactive requirements prioritization using a genetic algorithm. *Inf Softw Technol* 55:173-187.
- [17] Tao Lu, Ting Li, "Predicting Customer's Preference in E-Commerce Recommendation System: A Genetic Algorithm Approach," *icicic*, pp.420, Second International Conference on Innovative Computing, Information and Control (ICICIC 2007), 2007.
- [18] Xiaoyuan Zhang, Jianzhong Zhou, Changqin Wang, etc. (2012) Multi-class support vector machine optimized by inter-cluster distance and self-adaptive differential evolution[J], *Applied Mathematics and Computation* 218(9): 4973-4987.
- [19] Jason McZara & Shahryar Sarkani & Thomas Holzer & Timothy Eveleigh, Software requirements prioritization and selection using linguistic tools and constraint solvers—a controlled experiment, *Empir Software Eng* (2015) 20:1721–1761 DOI 10.1007/s10664-014-9334-8.
- [20] Seyed Abbas Sadatsakkak, Mohammad H. Ahmadi, Roham Bayat, Seyed Mohsen Pourkiaei, Michel Feldt , Optimization density power and thermal efficiency of an endoreversible Braysson cycle by using non-dominated sorting genetic algorithm, *Energy Conversion and Management* 93 (2015) 31-39.
- [21] S.-Y.Chung, C.Berenstein: !-Harmonic functions and inverse conductivity problems on networks. *SIAM J. Appl. Math.*, 65 (2005), 1200–1226.
- [22] Sever, A. (2011) A problem of Data Mining in E-Commerce, *Applied Mathematics and Computation*, Volume 217, Issue 24, Pages 9966 – 9980

[23] Svahnberg M, Goreschek T, Feldt R, Torkar R, Saleem SB, Shafique MU (2010) A systematic review on strategic release planning models. *Inf Softw Technol* 52:237-248.

[24] J. del Sagrado, I.M. del Aguila, F.J. Orellana, Multi-Objective ant colony optimization for requirements selection, *Journal of Empirical Software Engineering* (2014) doi: 10.1007/s10664-013-9287-3.

[25] Svensson, R.B., Goreschek, T., Regnell, B., Torkar, R., Shahrokni, A., Feldt, R., & Aurum, A (2011) Prioritization of quality requirements: state of practice in eleven companies. *Proceedings of the requirement engineering conference (RE), 2011 19th IEEE International* 67-78.

[26] A. Charan Kumari, K. Srinivas, M.P. Gupta, Software Requirements Optimization Using Multi-Objective Quantum-Inspired Hybrid Differential Evolution, in: Schuze, O., et al. (Eds.), *EVOLVE – A Bridge between Probability*, Springer, New York, 2013, pp. 107-120.

[27] Tonella, P., Susi, A., & Palma, F (2010) Using Interactive GA for requirements prioritization. 2nd international symposium on search based software engineering, IEEE Computer society, 57-66.

[28] J.T. Souza, C.L Brito Maia, T.N. Ferreira, R.A. Ferreira do Carmo, M.M. Albuquerque Brazil, An ant colony optimization approach to the software release planning with dependent requirements, in: *Proc. Of the 3th Int. Symposium on Search Based Software Engineering (SBSE '11)*, 2011, pp. 142-157.

[29] Cai, L. & Zhu, Y., (2015). The Challenges of Data Quality and Data Quality Assessment in the Big Data Era. *Data Science Journal*. 14, p.2. DOI: <http://doi.org/10.5334/dsj-2015-002>

A Machine Learning Algorithm Based on Inverse Problems for Software Requirements Selection

ORIGINALITY REPORT

15%

SIMILARITY INDEX

PRIMARY SOURCES

1	Chaves-González, José M., and Miguel A. Pérez-Toledano. "Differential evolution with Pareto tournament for the multi-objective next release problem", <i>Applied Mathematics and Computation</i> , 2015.	150 words — 3%
2	Sever, A.. "A problem of data mining in E-commerce", <i>Applied Mathematics and Computation</i> , 20110815	117 words — 3%
3	Chaves-González, José M., Miguel A. Pérez-Toledano, and Amparo Navasa. "Teaching learning based optimization with Pareto tournament for the multiobjective software requirements selection", <i>Engineering Applications of Artificial Intelligence</i> , 2015.	51 words — 1%
4	crestweb.cs.ucl.ac.uk	37 words — 1%
5	Kumari, A. Charan, and K. Srinivas. "Comparing the performance of quantum-inspired evolutionary algorithms for the solution of software requirements selection problem", <i>Information and Software Technology</i> , 2016.	29 words — 1%
6	www.iftach.org	27 words — 1%
7	hercules.granicus.com	22 words — < 1%

8	www.dtic.mil Internet	17 words — < 1%
9	www.lib.umd.edu Internet	17 words — < 1%
10	www.comp.nus.edu.sg Internet	16 words — < 1%
11	www.francesbaard.gov.za Internet	15 words — < 1%
12	www.hkbav.org Internet	15 words — < 1%
13	www.academicjournals.org Internet	14 words — < 1%
14	www.mowhs.gov.bt Internet	13 words — < 1%
15	www.ukm.my Internet	12 words — < 1%
16	Joseph Kee-Yin Ng. "Enhancing Indoor Positioning Accuracy by Utilizing Signals from Both the Mobile Phone Network and the Wireless Local Area Network", 22nd International Conference on Advanced Information Networking and Applications (aina 2008), 03/2008 Crossref	12 words — < 1%
17	Sever, Ali. "A neural network algorithm to pattern recognition in inverse problems", Applied Mathematics and Computation, 2013. Crossref	11 words — < 1%
18	McZara, Jason, Shahryar Sarkani, Thomas Holzer, and Timothy Eveleigh. "Software requirements prioritization and selection using linguistic tools and constraint solvers—a controlled experiment", Empirical Software Engineering, 2014.	10 words — < 1%

-
- 19 www.mathnet.or.kr 10 words — < 1%
Internet
-
- 20 [Lecture Notes in Computer Science, 2013.](#) 9 words — < 1%
Crossref
-
- 21 www.harriscountytexas.gov 9 words — < 1%
Internet
-
- 22 cte.ed.gov 9 words — < 1%
Internet
-
- 23 www.springerprofessional.de 9 words — < 1%
Internet
-
- 24 [Studies in Computational Intelligence, 2015.](#) 8 words — < 1%
Crossref
-
- 25 gorschek.com 8 words — < 1%
Internet
-
- 26 [Lecture Notes in Computer Science, 2014.](#) 8 words — < 1%
Crossref
-
- 27 lup.lub.lu.se 8 words — < 1%
Internet
-
- 28 [Babar, Muhammad Imran, Masitah Ghazali, Dayang N.A. Jawawi, Siti Maryam Shamsuddin, and Noraini Ibrahim. "PHandler: An expert system for a scalable software requirements prioritization process", Knowledge-Based Systems, 2015.](#) 7 words — < 1%
Crossref
-
- 29 [Kumari, A. Charan, K. Srinivas, and M. P. Gupta. "Software requirements selection using Quantum-inspired Multi-objective Differential Evolution Algorithm", 2012 CSI Sixth International Conference on Software Engineering \(CONSEG\), 2012.](#) 7 words — < 1%
Crossref

EXCLUDE QUOTES ON
EXCLUDE BIBLIOGRAPHY ON

EXCLUDE MATCHES OFF