

# FOUNDATION SOIL CHARACTERISATION FOR A BUILDING WITH MULTIPLE CRACKS AT TARKWA, GHANA

George M Tetteh<sup>1</sup> Festus A Mensah<sup>2\*</sup> and Bernard Ofori<sup>2</sup>,

University of Mines and Technology, P. O. Box 237, Tarkwa, Ghana<sup>1</sup>. Building and Road Research Institute, CSIR, Kumasi, Ghana<sup>2</sup>.

## Authors' contributions

*This work was carried out in collaboration between all authors. Author GMT designed the study, managed the literature and wrote the first draft of the manuscript and effected most of the corrections after the review. Authors FAM and BO did the field sampling, laboratory analyses and statistical plots. Authors FAM and BO organised the manuscript to journal format with guidance from author GMT and revised the plots after the review. All authors read and approved the final manuscript.*

## ABSTRACT

Formation of cracks on buildings could be attributed to many factors such as properties of soils, geology, structural defects and climatic conditions. A public building at Tarkwa in the Western Region of Ghana developed cracks that rendered it unsafe and so it was demolished for a new structure to be put in place. Geotechnical investigations were undertaken to ascertain possible contributions of the foundation soils to development of these cracks before it was demolished. Site investigations on test holes and laboratory analyses showed that, the foundation soils were mainly dense silty sand, with average moisture content of 8.9% and specific gravity of 2.7Kg/m<sup>3</sup>. These characteristics are typical of quartz sands. Though the soil at the site where the building was situated was non-plastic, plasticity index (PI) for soils at neighbouring sites ranged from 1.5% to 7.8% at an average of 4.9% and so consolidation immediately after structural loading was negligible and might not result in differential settling. Moisture content was lower than liquid limit as liquidity indices were between -0.326 to -12.653. These soils exhibited minimal liquefaction potential and were free draining. They were of high permeability and therefore could consolidate immediately after being subjected to structural load. Hence the foundation soils played little role in the formation of cracks on the building which was exposed to frequent ground vibration as the building was close to a defunct underground mine, heavy vehicular traffic and a railway station; with surface mining activities at a permitted distance.

**Keywords:** Soil Characterisation, Building foundation, Differential settling, Cracks

## 1. INTRODUCTION

Building foundations need to be on stable and strong soils to avoid cracks, sinking, or falling. Geotechnical investigations before, during, and after construction are necessary to avoid the formation of cracks on buildings, walls and floors [1]. Cracks can result from external forces such as shrinking and swelling of some clay minerals when subjected to moisture variations, differential foundation movements, and poor compaction of foundation soils and settling from dimensional changes in the masonry work [2]. Formation of cracks on a building could also be attributed to many factors such as structural defects, geotechnical defects and geology [3]. The old public building had cracks before it was pulled down for reconstruction in 2007. According to [4] the cracks on the structure could be attributed to geological structures in the foundation rocks. This paper presents geotechnical evaluation of foundation soils to verify if they contributed to the formation of the cracks on the building.

## 2. GEOLOGY OF TARKWA

Tarkwaian rocks in the Ashanti belt of Ghana stretch from near Axim in the Western Region to the edge of the Voltaian basin near Agogo in the Ashanti Akim District [5]. The Birimian consists of metamorphosed volcanic rocks and metasedimentary rocks. Initial subdivision by [6] placed the rocks into Lower Birimian made up of metasedimentary rocks while the Upper

Birimian mainly comprises of metavolcanic rocks. According to [7] these rocks are contemporaneous and form lateral facies and were intruded by belt granitoids and basin granitoids into volcanic rocks and metasedimentary rocks respectively. The Tarkwaian is regarded as younger than the Birimian as the basal rock of the Tarkwaian, which is the Kawere conglomerate, consists of reworked pebbles from the Birimian and so it is made up of sub-rounded closely packed pebbles of Birimian metavolcanic rocks, metasedimentary rocks, granitoids, carbonates, quartz and other vein minerals and rocks. The Kawere Group is overlain by a palaeoplacer gold bearing banket quartz conglomerate. The Tarkwaian stratigraphy by [8] from the youngest above is as follows:

- Huni Sandstone and Dompim Phyllites
- Tarkwa Phyllites
- Banket Series
- Kawere Conglomerate

The Banket Series is subdivided into footwall and hanging wall quartzites separated by a sequence of mineralised quartz-pebble conglomerates and pebbly quartzites. The general orientation of pebbles show that fluvial transport was from east and north-east [9]. The Tarkwaian sequence had been subjected to low-grade regional metamorphism of greenschist facies and according to [10], subjected to five episodes of deformation accompanied by thrust faults and dolerite sills.

## 3. METHODOLOGY

The site in this study was at the premises of a building which housed public offices at Tarkwa but had structural defects made up of multiple cracks on the walls at various angles, lengths, widths, depths and extent of displacement [4]. The building was close to a market, lorry station and situated ninety-two metres (92 m) north of an old adit with crosscuts. It was a low-rise building with about six offices and toiletry facilities. The building was constructed with sand mixed with cement (sandcrete). The cracks on the walls made the building unsafe for habitation and so it was demolished and reconstructed.


Three test pits were excavated in *in situ* surface soil with a pick axe and shovel to a depth of 1 m each. Samples labelled AD, BS and FS were taken from spots near a mine adit, close to UMaT Basic School and at a site near the building respectively (Figure 1). The purpose of excavation was to visually examine the soil profiles and obtain soil samples for laboratory tests to ascertain physical characteristics of the various layers of soil.

The following laboratory tests were carried out in accordance with BS 1377 [11]:

- Moisture content
- Specific gravity
- Atterberg Limits
- Particle Size Distribution

#### 4. RESULTS AND DISCUSSION


The results of the laboratory tests are presented in Table 1 and distribution curves are shown in Figure 2. From Table 1, samples from the surface to 0.5 m depth showed various proportions of silt, gravel and sand. Moisture content varied from 5.42% in sample BS to 9.08% in the sample at the site (FS), clay content varied from a minimum of 0.0 in samples BS and FS but highest in sample AD at 3.0%. Silt is lowest in sample FS (17.8%) and highest (72%) in sample AD; gravel content is minimum (0.4%) in sample AD and highest (28.2%) at the site (sample FS). An intermediate layer between 0.5 - 0.7 m depth occurred near the adit which was made up of gravelly, silty sand (gravel - 9.8%, silt - 12.4%, and sand - 78.8%). This layer was non-plastic, contained moisture content of 11.45% and specific gravity of 2.64 Kg/m<sup>3</sup>.

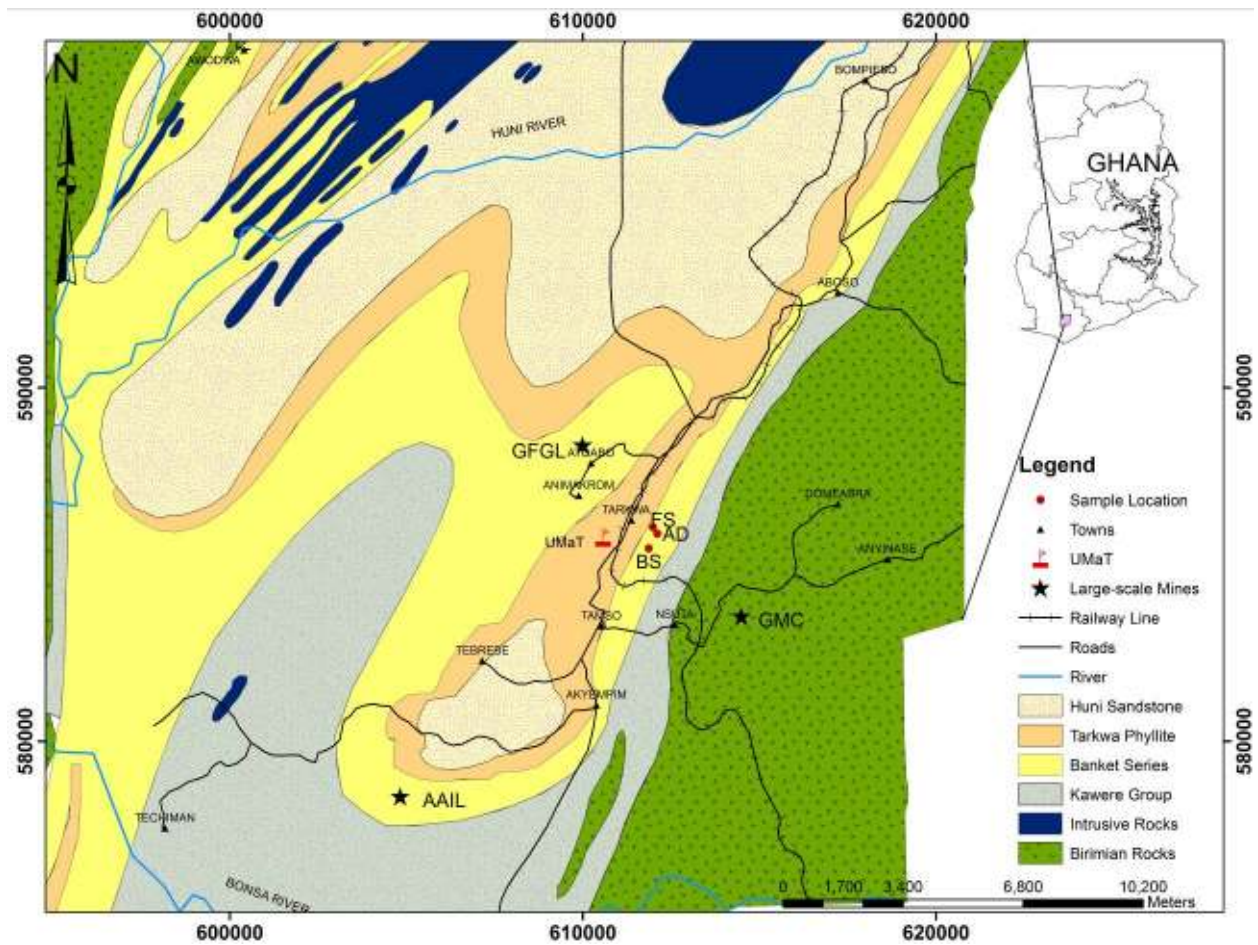

**Figure 1: Geological Map of Tarkwa area showing Sample Locations (Modified after [6])**

**Table 1 Summary of Laboratory Tests on Soils from Tarkwa**

Sample Location	Depth (m)	Moisture Content (%)	Specific Gravity (Kg/m <sup>3</sup> )	ATTERBERG LIMITS (%)			PARTICLE SIZE ANALYSIS (HYDROMETER) (%)				REMARKS
				LL	PL	PI	Clay (C)	Silt (M)	Sand (S)	Gravel (G)	
AD	0.0 - 0.5	8.85	2.64	20.9	13.1	7.8	3.0	72.0	24.6	0.4	Sandy silt with some clay
	0.5 - 0.7	11.45	2.64	NON-PLASTIC			0.0	12.4	77.8	9.8	Gravelly silty sand
	0.7 - 1.0	14.93	2.64	20.5	16.3	4.2	1.6	12.2	69.2	17.0	Silty gravelly sand with some clay
BS	0.0 - 0.5	5.42	2.68	25.9	24.4	1.5	0.0	24.0	63.6	12.4	Gravelly silty sand
	0.5 - 1.0	6.39	2.68	19.9	13.4	6.5	0.0	24.0	66.0	10.0	Gravelly silty sand
FS	0.0 - 0.5	9.08	2.68	NON-PLASTIC			0.0	17.8	54.0	28.2	Silty gravelly sand
	0.5 - 1.0	6.42	2.68	NON-PLASTIC			0.0	8.0	22.8	69.2	Sandy gravel with some silt

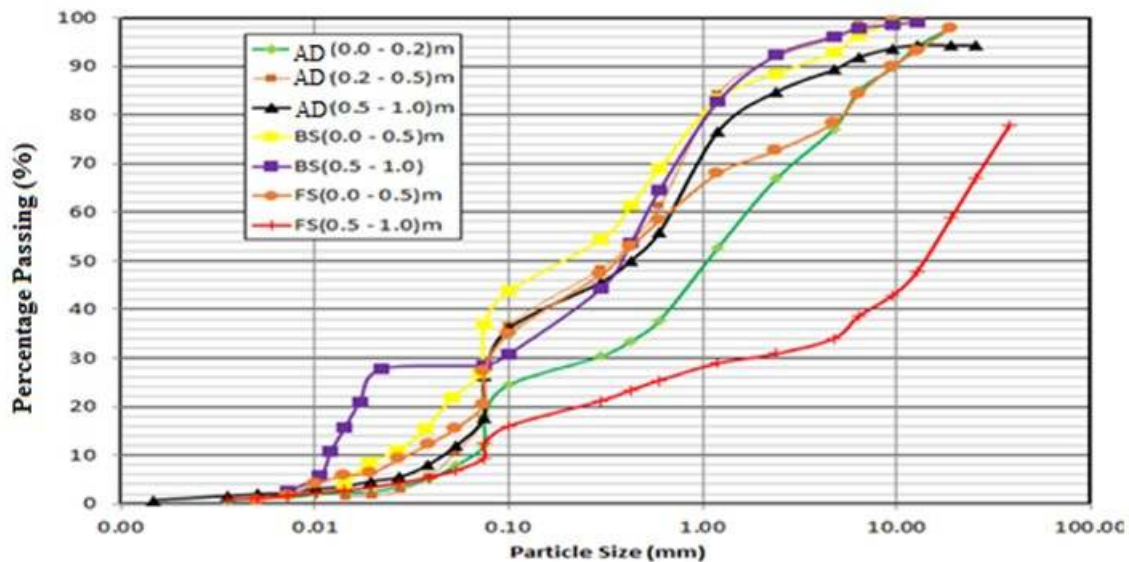


**Figure 2: Particle Size Distribution of Soils at the Tarkwa Site**

The soil layer up to 1.0 m was made up of various types of soil proportions. The layers were uniform in depth (0.5 – 1.0 m) at the Basic School (BS) and the building site (FS) but at the

adit area it was 0.7 -1.0 m. The soils were made up of clay - 0.0 to 3.0% (sample AD); silt - 12.2% (sample AD) to 24.0% (sample BS); sand - 22.8% (sample FS) to 69.2% (sample AD) and

gravel - 10.0% (sample BS) to 69.2% (sample FS). The area is underlain by dense silty sand with admixtures of gravel and minor clay. The average moisture content was 8.9% with average specific gravity of 2.7 Kg/m<sup>3</sup>; typical of

quartz sands. The plasticity index (PI) ranged from 1.5% to 7.8% with an average of 4.9% (Table 1). Figure 3 shows that the soil at the site was mainly silt and non-plastic.

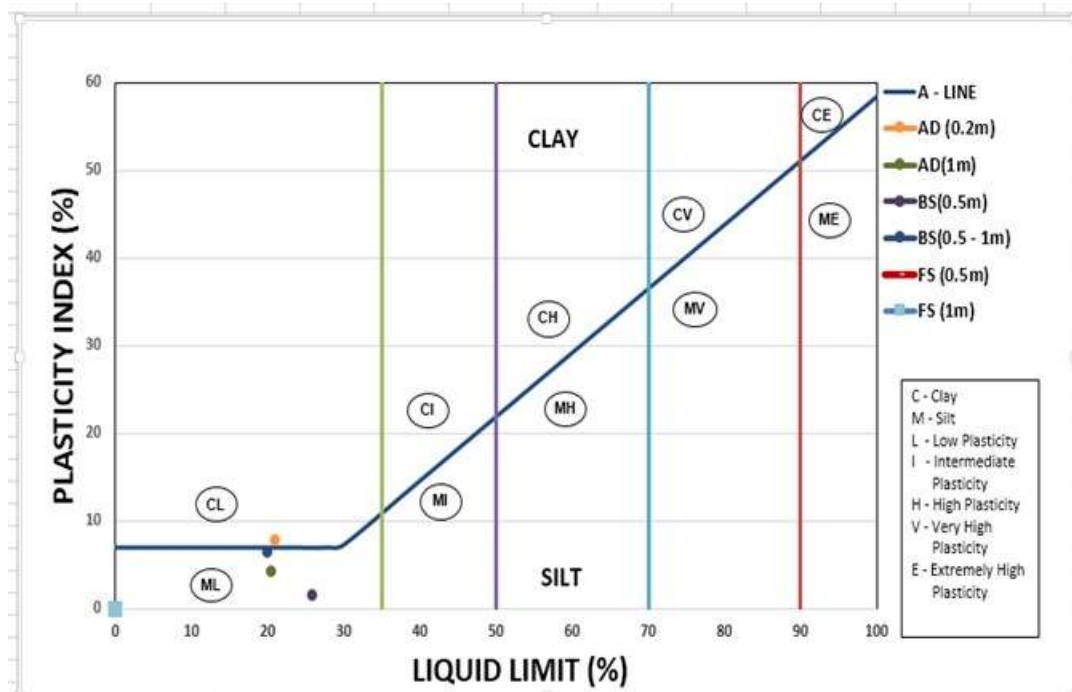

**Figure 3: Plasticity Index vs. Liquid Limit of the Soils from Tarkwa Site**

Ground vibration caused by mine blast and movement of heavy duty trucks in the building area was likely to subject the soil at the site to liquefaction due to its composition of silty sand with low clay. Liquefaction potential analysis of the foundation soils showed that the moisture content (MC) was lower than liquid limit (LL). Hence *in situ* water content was above the liquid limit. Soils under these conditions are unstable during ground vibrations as the larger the MC with respect to LL, the greater the likelihood of liquefaction. Liquidity index (LI) was proposed by [12] to quantify liquefaction using the following relationship:

$$LI = \frac{\text{Moisture Content} - \text{Plastic Limit}}{\text{Plasticity Index}}$$

LI ≥ 1 is an indication for potential liquefaction

Since liquidity Indices (LI) for soils at the building site was between -0.326 to -12.653, there could not have been liquefaction of the soils.

Since the site was exposed to frequent ground vibration as the building was close to a defunct underground mine adit, heavy vehicular traffic and a railway station; with surface mining activities at a permitted distance, findings of workers in seismic areas were referred to.



[13] used the term liquefaction for the development of significant strains or strength as in fine grained soils which exhibited sand like behaviour whereas cyclic softening failure was used to describe fine grained soils with clay like behaviour. Liquidity index according to [14] who used empirical observations showed that soils were susceptible to liquefaction if they had finer fraction less than 10% and liquid limit less than 32. Soils, however, were not susceptible to liquefaction if fines were greater than 10% and with their liquid limit greater than or equal to 32. These criteria when applied to the soils at the Tarkwa site could indicate liquefaction conditions (Table 1, Figure 2). However, using plasticity index, [15] constrained liquefaction to fine grained soils with  $PI \leq 12$  and liquid limit,  $LL > 0.8$ . Thus the soils at the Tarkwa site which were non-plastic could not have been susceptible to liquefaction.

According to [13], liquidity index (LI) generally corresponds to stronger soils with lower sensibilities but cyclic loading resistance increases in fine grained soils as the potential for deformation decreases with decreasing liquidity index. They observed that the location of soil could cause change in soil behavior - fine grained soils could act differently such that sand-like soils behave as if they were clay-like.

Soils at Tarkwa site, occurred on competent foliated quartzite intercalated with conglomerate of the Tarkwaian Banket Series (Figure 1). Hence [4] linked the maximum stress direction on the rocks in the area to the minimum stress direction on the building that was at the site and interpreted cracks on the building to settling under

maximum load of the building and possibly caused by slip during adjustment of foundation rocks toward mine openings.

## 5. CONCLUSION

Subsurface soils at the building site at Tarkwa are mainly dense silty sand with low plasticity, usually free draining and highly permeable. The soils could consolidate immediately after being subjected to structural loads and have differential settling capacity. The cracks on the building could have been caused by improper settling of the foundation soils before the construction of the building, making geological structures near the building the main contribution factors [4].

## REFERENCES

1. Amadi AN, Eze CJ, Igwe CO, Okunlola IA, Okoye NO. Architect's and Geologist's View on the Causes of Building Failures in Nigeria. *Modern Applied Science*. 2012; 6(6):31-38.
2. Anonymous. *Typical Foundation Problems*. 2011; Accessed: 5 June 2015.  
Available: <http://www.stonehengefoundations.com> (May 22, 2011).
3. Yunusa GH, Hamza U, Abdulfatah AY, Suleiman A. *Geotechnical Investigation into the Causes of Cracks in Building: A Case Study*. Publication of EJGE. 2013; 18:2823-2833.

4. Tetteh GM, Mensah FA. Evaluation of Cracks on a Building at Tarkwa in Ghana with respect to Foliations and Joints in Foundation Tarkwaian Rocks. *International Journal of Mining Science*. 2016; 2(1):25-32.
5. Kesse GO. *The Mineral and Rock Resources of Ghana*. A. A. Balkema, Rotterdam; 1985; 610
6. Junner NR. *The Geology of the Gold Coast and Western Togoland*. Gold Coast Geological Survey. 1940; 11:1-40.
7. Leube A, Hirdes W, Mauer R, Kesse GO. The Early Proterozoic Birimian Supergroup of Ghana and its associated gold mineralisation. *Precambrian Research*. 1990; 46:139–165.
8. Junner HR, Hirst T, Service H. *The Tarkwa Goldfields*. Gold Coast Geological Survey Memoir. 1942; 6:1-75.
9. Hirdes, W and Nunoo, B. The Proterozoic Palaeoplacers at Tarkwa Gold Mine, SW Ghana. *Geologisches Jahrbuch*. D, H 100. 1994; 247-311.
10. Allibone, A, Teasdale J, Cameron G, Etheridge M, Uttley P, Soboh A, et al. Timing and Structural Controls on Gold Mineralisation at the Bogoso Gold Mine, West Africa. *Economic Geology*. 2002; 17: 949-969.
11. Anonymous. Methods of Test for Soils for Civil Engineering Purposes. British standard Institute BSI 1377-2. 1990, 68.
12. Bowles, JE. *Foundation Analysis and Design*. 5<sup>th</sup> Edition, McGrawHill Companies, United States; 1996; 237.
13. Boulanger, RW. and Idriss, IM. Liquefaction Susceptibility Criteria for Silts and Clays. *Journal of Geotechnical Engineering*; (2006); 1413-1426.
14. Andrews, DCA. and Martin, GR. Criteria for liquefaction of silty soils *Proceedings, 12<sup>th</sup> World Conference on Earthquake Engineering*; Auckland, New Zealand; 2000.
- 15 Bray, JD., Sancio, RB., Riemer, MF. and Durgunoglu, T. Liquefaction susceptibility of fine-grained soils. *Proceedings of 11<sup>th</sup> International Conference on Soil Dynamics and Earthquake Engineering*; 2004b